


MP81CS, MP81CT

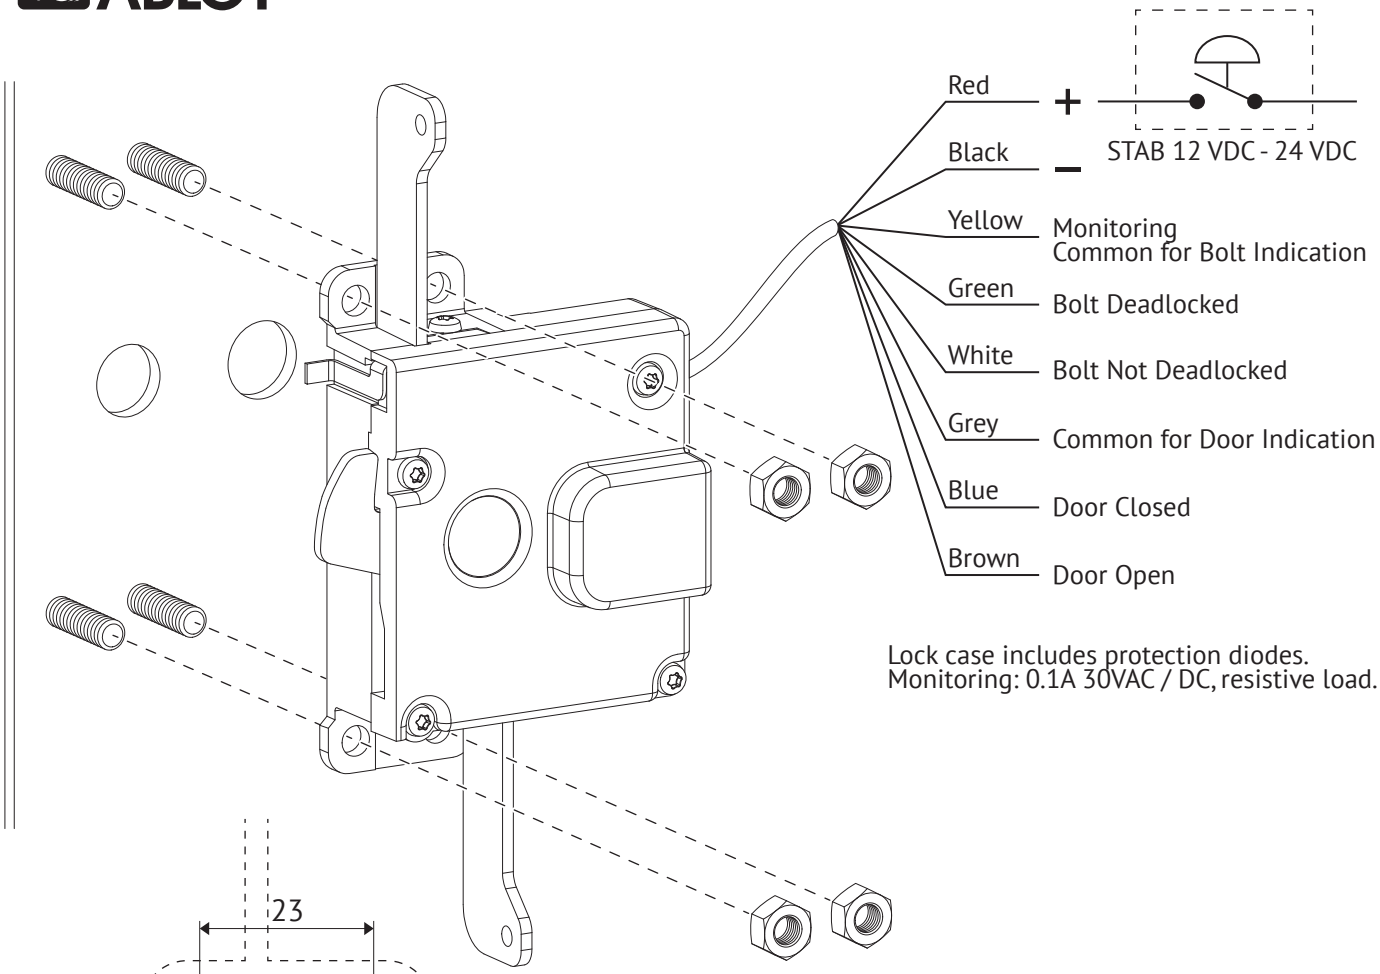

Lock case includes protection diodes.
Monitoring: 0.1A 30VAC / DC, resistive load.

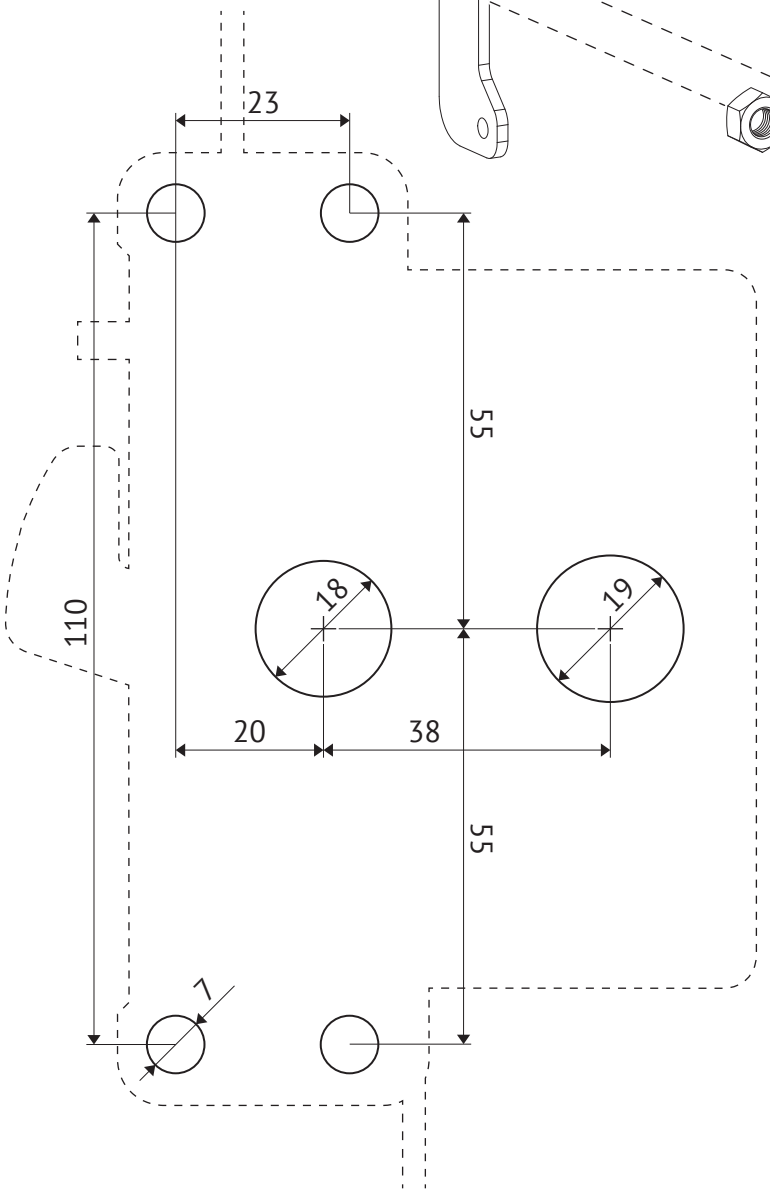


Trigger bolt must engage when door is closed to enable Door Open / Door Closed indication.

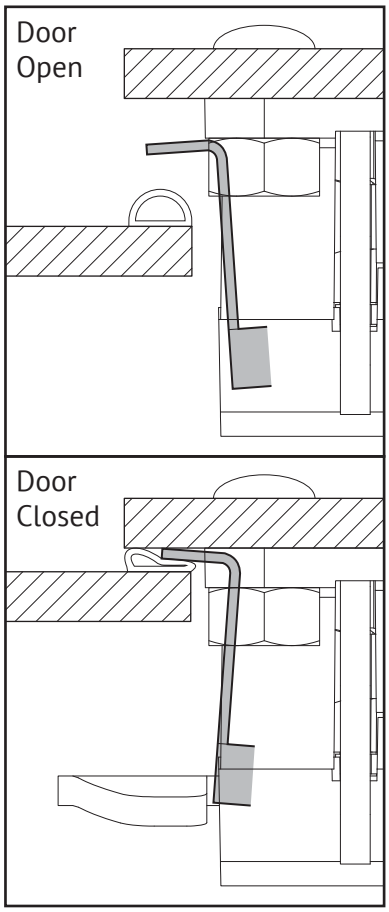

13.7.2018 Rev.1

Normal opening

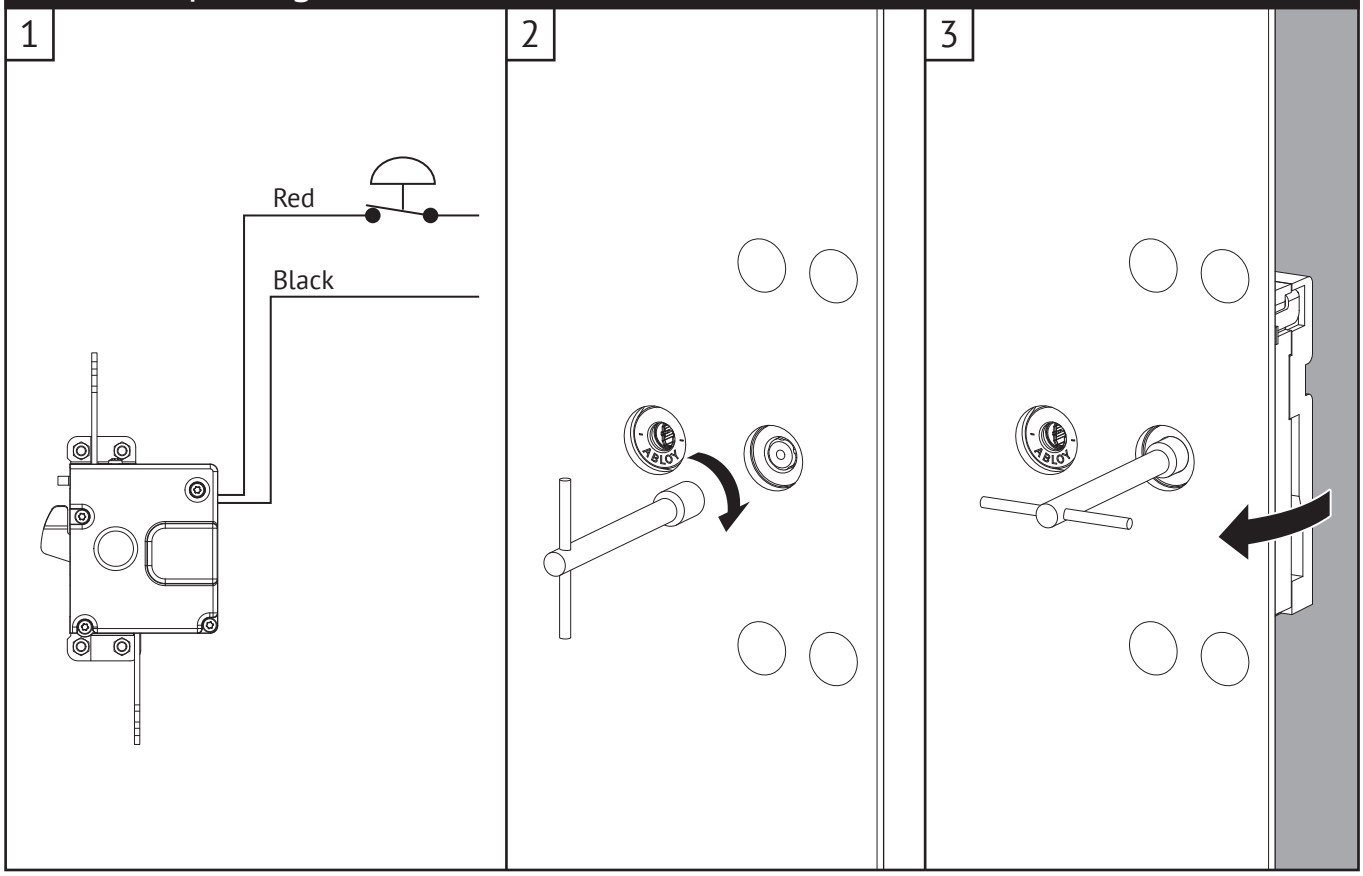

Emergency opening

