
PLUTO 4000XE MK2
SS656XCE

SILVER STAR
Professional Lighting

PLUTO



DIMENSIONS

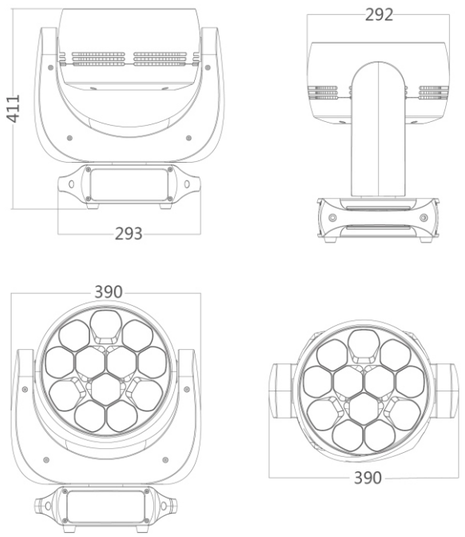

Optical system

- Light source: 12x40W (RGBW), Total 480W
- Beam angle: 4.5º-36º
- Field Angle: 9º - 52º

Electrical Specs

- Voltage: 100-240VAC, 50/60Hz
- Max power: 460W
- Power Connection: power in and out
- Signal socket: 3 pin or 5 pin in/out, RJ45 in/out for ArtNet

Control System

- Pan/Tilt rotation: 540º/270º (8-16 Bit)
- Dimmer: 0-100% 16 Bit
- Cooling: Forced Convection
- Control: DMX512, RDM, ArtNet, sACN, Web Server,
- W-DMX (Optional)
- Display: On board, Custom Mode
- Strober: 0-25Hz
- Con Personality: HSIC/13CH, PERSON1(13CH), PER
- SON2(21CH), PIXEL(57CH), CMY(15CH)
- Special: Pan/Tilt movement blackout, User selectable pan/tilt
- ranges

Appearance

- Size: 390x292x411mm
- Weight: 12.5Kg
- Casing: Flame retardant plastic (V0)
- Color: Black

Work Environment

- Ambient Temp: 0º- 45ºC
- IP Rated: IP20


Certifications


- CE, MET

PRODUCT INTRODUCTION

PLUTO 4000XE MK2 Add ARTNET-OUT, upgrade and optimize the motor to acheive a much lower zoom noise. Beam angle 4.5°-36°,Field angle 9°-52°. PLUTO 4000XE is a professional high-power moving light for wash and beam. It can also be used as an effect light for perfect individual pixel control. Loaded with 12 pcs of latest 40W RGBW (4 in 1) LEDs and special optics design, it enjoys higher efficiency in lighting. Applied with intelligent color-mixing system, HSIC, any color needed can be easily mixed in high quality. With excellent performance, it is applicable to different kinds of places, such as concert, TV station, and theater and rental market.

ILLUMINANCE AT DISTANCE

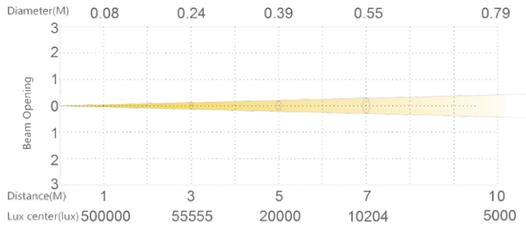


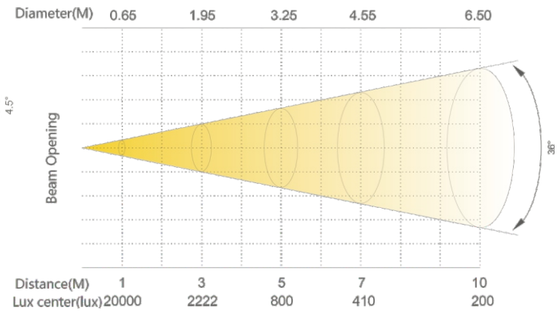

ACCESSORIES

(Accessories not include unless otherwise stated)

Wireless receiver Kit
(2440010455)



Flight Case
(1320400161)