


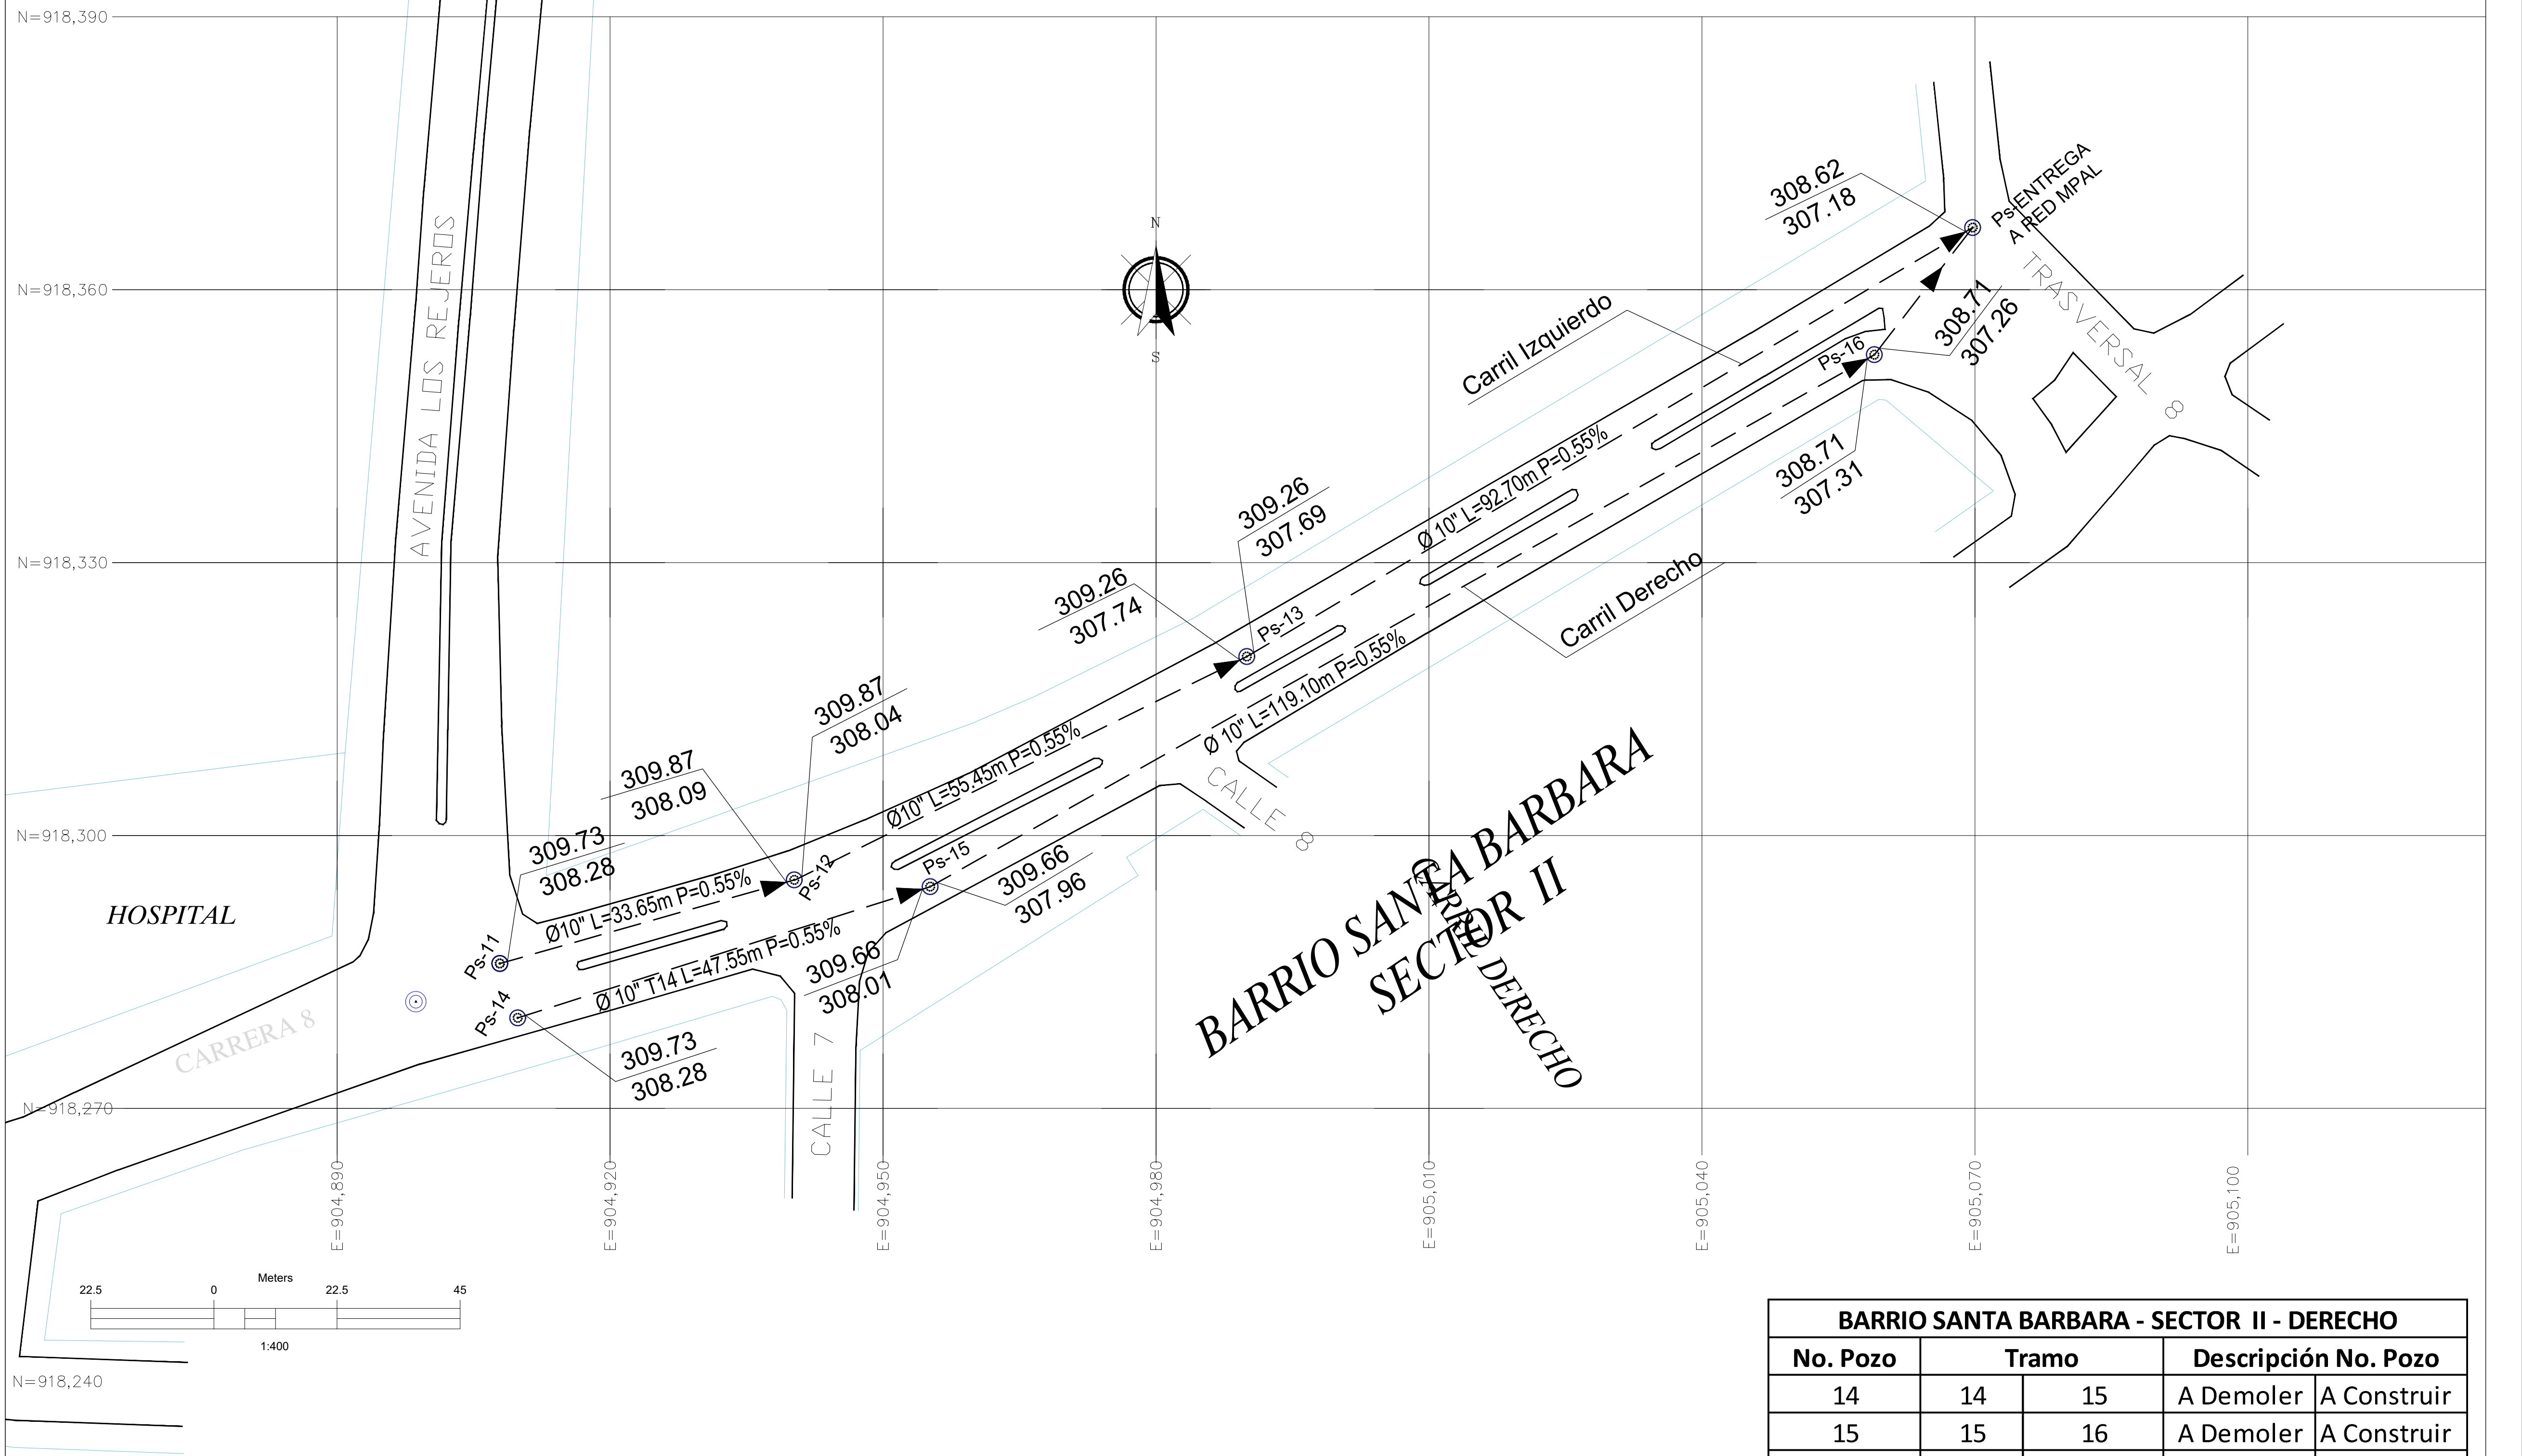

SECTOR II - BARRIO SANTA BARBARA TRAMO 2 CARRIL DERECHO													
TUBERIA TRAMO	Pozo		Longitud (m)	Diametro (Pulgadas)	Cota Terreno		Pendiente Tuberia	Cota Clave		Cota Batea		Profundidad a Cota Batea	
	DE	A			Inicial	Final		Inicial	Final	Inicial	Final	Inicial	Final
T-14	Pz 14	Pz 15	47,55	10	309,73	309,66	0,55%	308,53	308,27	308,28	308,01	1,45	1,65
T-15	Pz 15	Pz 16	119,10	10	309,66	308,71	0,55%	308,22	307,56	307,96	307,31	1,70	1,40
T-16	Pz 16	Pz Entrega	17,65	10	308,71	308,62	0,55%	307,51	307,42	307,26	307,16	1,45	1,46

CONVENCIONES

CONSTRUCCIONES:

VIAS:

ALCANTARILLADO PROYECTADO

PERFIL TRAMO 2 - CARRIL DERECHO
SECTOR SANTA BARBARA

