






# **ing BONFIGLIOLI**



**A**

## **P 5000 L**

Courtesy of Crane.Market

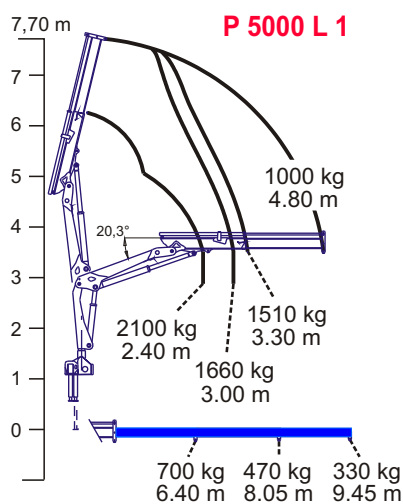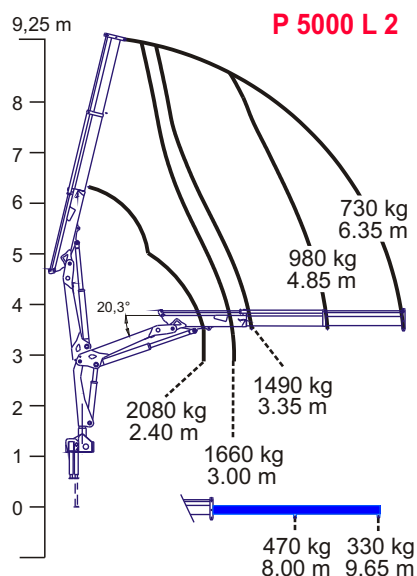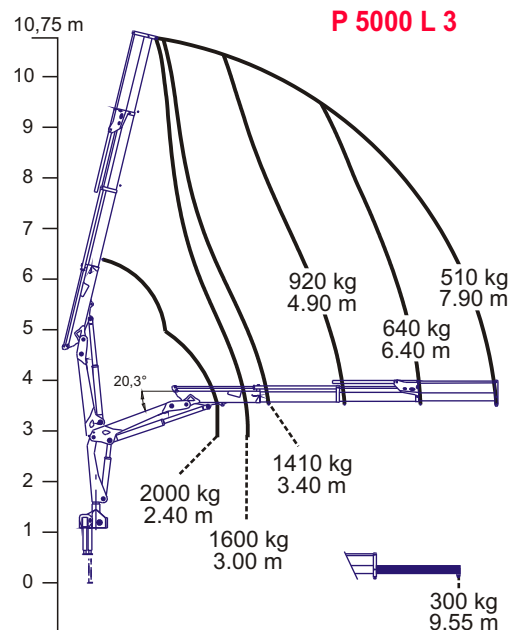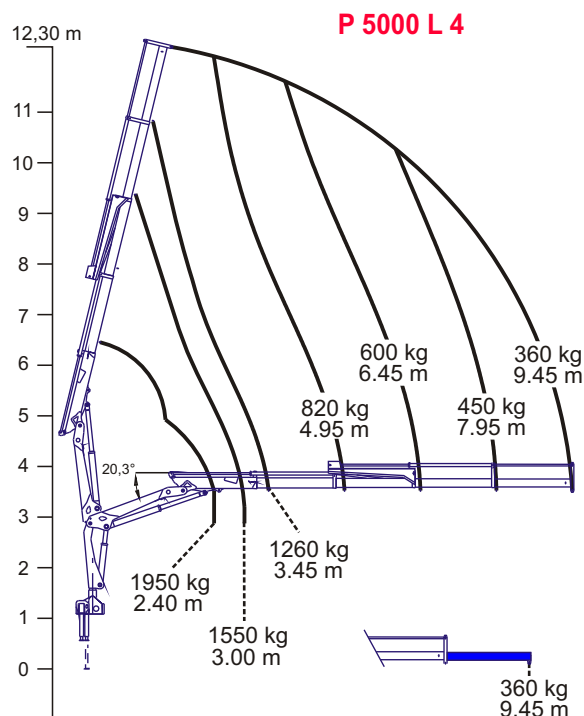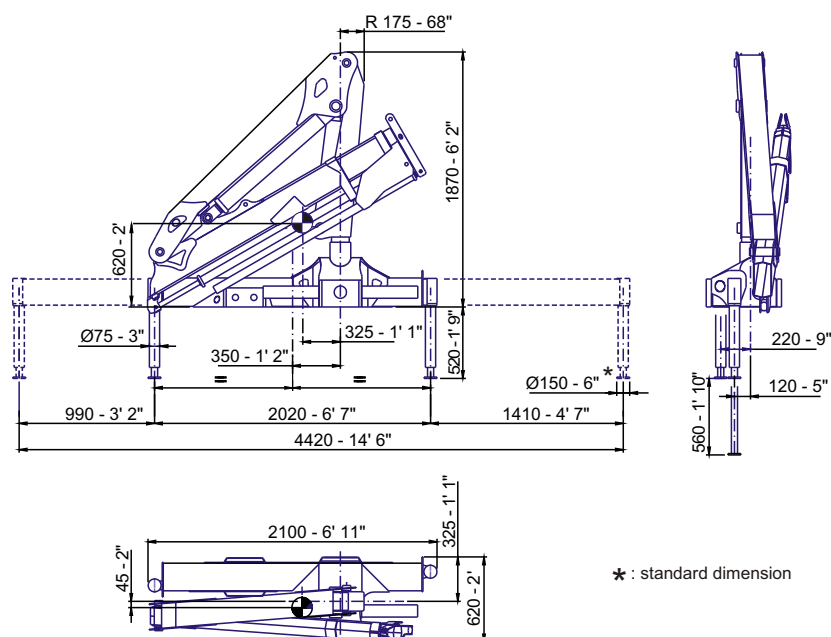

|                                                                                                                                                                                                                                                                                                                                                                   | P 5000 L 1 | P 5000 L 2 | P 5000 L 3 | P 5000 L 4 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|------------|------------|
| momento massimo di sollevamento / Max. lifting moment / momento máximo de elevación / couple de levage maximum / Max. Hubmoment                                                                                                                                                                                                                                   | 49,4 kNm   | 49,0 kNm   | 47,1 kNm   | 45,9 kNm   |
| massima capacità di sollevamento / Max. lifting capacity / maxima capacidad de levantamiento / meilleure capacité de soulèvement / Max. Hubkraft                                                                                                                                                                                                                  | 2100 kg    | 2080 kg    | 2000 kg    | 1950 kg    |
| massima capacità nominale / Max. nominal capacity / maxima capacidad nominal / meilleure capacité nominale / Max. Hubkraft                                                                                                                                                                                                                                        | 2530 kg    | 2500 kg    | 2430 kg    | 2380 kg    |
| massimo sfilo idraulico / max. hydraulic outreach / max. alcance hidraulico / rallonge hydraulique max. max. hydraulische reichweite                                                                                                                                                                                                                              | 4800 mm    | 6350 mm    | 7900 mm    | 9450 mm    |
| portata pompa consigliata / recommended pump delivery / caudal bomba aconsejada / debit d'huile recommandé Förderleistung der Hydraulikpumpe                                                                                                                                                                                                                      | 15 l/min   | 15 l/min   | 15 l/min   | 15 l/min   |
| pressione di lavoro / working pressure / presión de trabajo / pression de travail / Betriebsdruck                                                                                                                                                                                                                                                                 | 290 bar    | 290 bar    | 290 bar    | 290 bar    |
| capacità serbatoio / tank capacity / contenance du reservoir / capacidad deposito de aceite / Inhalt des Öltanks                                                                                                                                                                                                                                                  | 37 l       | 37 l       | 37 l       | 37 l       |
| angolo di rotazione / slewing angle / angulo de giro / angle de rotation / Schwenkbereich                                                                                                                                                                                                                                                                         | 402°       | 402°       | 402°       | 402°       |
| coppia di rotazione / slewing torque / momento de giro / couple de rotation / Drehmoment                                                                                                                                                                                                                                                                          | 5,8 kNm    | 5,8 kNm    | 5,8 kNm    | 5,8 kNm    |
| peso gru completa di stabilizzatori estensibili e martinetti piedi / crane weight including side extensions and rams of stabilizers / peso de la grua incluidos las extensiones y los cilindros de los estabilizadores / poids grue complète de bequilles extensibles et verins stabilisateurs / Eigengewicht, einschl.-manuell seitlich ausziehbare Abstützungen | 670 kg     | 720 kg     | 780 kg     | 850 kg     |