Bogotá, D.C., 04 de diciembre de 2023

Informe de supervisión correspondiente al mes de noviembre del año 2023, en atención a las funciones establecidas en los artículos 83 y subsiguientes de la Ley 1474 de 2011, en concordancia con la Resolución No. 00154 del dieciséis (16) de abril del dos mil dieciocho (2018) *"Por la cual se actualiza el Manual de Contratación del Fondo Rotatorio de la Policía".*

## 1. Información del Supervisor

| | |
|---|---|
| Grado | Capitán |
| Nombre y apellidos | LUIS MIGUEL OTALORA DUEÑAS |
| C.C. | 1.032.387.805 |
| Cargo en la dependencia | Responsable Ingeniería Aeronáutica |
| Unidad de dependencia | DIRAN-ARAVI |
| Correo electrónico | diran.avipo-gra@correo.policia.gov.co |
| Teléfono | 3124332901 |

## 2. Información del Contrato

| | | | | |
|---|---|---|---|---|
| No. de Proceso | SUBASTA-005-2023 | | | |
| Tipo de Contrato | Suministro | | | |
| Contrato No. | 042-2-2023 | | | |
| Unidad | ÁREA DE AVIACIÓN POLICIAL | | | |
| Objeto | SUMINISTRO CONSUMIBLES PARA EL AREA DE AVIACIÓN DE LA DIRECCIÓN ANTINARCÓTICOS-POLICÍA NACIONAL | | | |
| Valor Inicial | $3.184.374.999,99 | | | |
| Valor Adición | $1.200.000.000,00 | | | |
| Valor Total | $4.384.374.999,99 | | | |
| Plazo de ejecución | Fecha de Inicio | | Fecha Terminación | |
| 22-12-2023 | 12-07-2023 | | 22-12-2023 | |
| Aplica Acta de inicio | **SI** | | **NO** | **X** |
| Fecha de Acta de inicio | **N/A** | | | |

## 3. Información del Contratista

| Nombre Representante legal | C.C | Razón social Contratista | NIT |
|---|---|---|---|
| María Fernanda Rodríguez Castillo | 52.449.804 | Unión Temporal Consumibles Aeronáuticos PONAL | 901.516.560-7 |

## 4. Información Presupuestal

| No. Certificado de Disponibilidad Presupuestal SIIF | Fecha | Valor |
|---|---|---|
| 10023 | 25/04/2023 | $ 769.230.769,23 |

| | | |
|---|---|---|
| 10123 | 25/04/2023 | $ 673.076.923,07 |
| 9823 | 25/04/2023 | $ 961.538.461,54 |
| 9923 | 25/04/2023 | $ 780.528.846,15 |
| No. Registro Presupuestal del Compromiso SIIF | Fecha | Valor |
| 59223 | 06/07/2023 | $ 961.538.461,54 |
| 59323 | 06/07/2023 | $ 780.528.846,15 |
| 59423 | 06/07/2023 | $ 769.230.769,23 |
| 59523 | 06/07/2023 | $ 673.076.923,07 |

**ADICIÓN:**

| No. Certificado de Disponibilidad Presupuestal SIIF | Fecha | Valor |
|---|---|---|
| 17423 | 23/08/2023 | $1.200.000.000,00 |
| No. Registro Presupuestal del Compromiso SIIF | Fecha | Valor |
| 75023 | 24/08/2023 | $1.200.000.000,00 |

**Nota 1:** En caso de requerirse información presupuestal adicional, anexar cuadro detallado de las mismas.

**5. Actividades y/o Eventos Desarrollados por el contratista y supervisor o interventor. (Incluir información en materia ambiental y de seguridad y salud en el trabajo de acuerdo a lo establecido en el contrato y anexar soportes. Si aplica)**

En el informe de supervisión del mes de noviembre se dio cumplimiento en materia ambiental y de seguridad y salud en el trabajo de acuerdo a lo establecido en el contrato y teniendo en cuenta la información anexa.


**5.1 Actividades y/o Eventos Desarrollados por el Contratista**

- El día 08/11/2023 el contratista realiza la entrega del siguiente material en las instalaciones de la compañía Antinarcóticos de Aviación Guaymaral.


| No DE CONTRATO 042-2-2023 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| CONTRATISTA : UNION TEMPORAL CONSUMIBLES AERONAUTICOS PONAL 2023 | | | | | | | | |
| ENTREGA 9 (COAGY) 08/11/2023 | | | | | | | | |
| Ítem | CONTRATO | | Parte No. | Descripción | U/M | CANT | VALOR UNITARIO | VALOR TOTAL |
| | No. | Ítem | | | | | | |
| 1 | INSCRITO PEDIDO 1 | 57 | 75310-0530 | LIMPIAVIDRIOS X 530cc | 25 | EA | $ 14.078,88 | $ 351.972,00 |
| 2 | INSCRITO PEDIDO 1 | 93 | PR1428-B 1/2 | ADHESIVE SEALANT | 1 | PINT-KIT | $ 1.404.709,80 | $ 1.404.709,80 |
| 3 | INSCRITO PEDIDO 1 | 121 | MS9388-009 | PACKING | 350 | EA | $ 25.997,13 | $ 9.098.995,50 |
| 4 | INSCRITO PEDIDO 1 | 125 | WK1030 | MAIN FILTER | 6 | EA | $ 457.327,24 | $ 2.743.963,44 |
| 5 | INSCRITO PEDIDO 1 | 156 | PR1440-A 1/2 | ADHESIVE SEALANT | 2 | PINT-KIT | $ 864.651,71 | $ 1.729.303,42 |
| 6 | INSCRITO PEDIDO 1 | 159 | HCS2125 | SEALANT TAPE Black Roll – HCS2125 | 4 | ROLLO | $ 211.576,73 | $ 846.306,92 |
| 7 | INSCRITO PEDIDO 1 | 164 | AS3085-126 | PACKING PREFORMED | 10 | EA | $ 8.337,27 | $ 83.372,70 |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 8 | INSCRITO PEDIDO 1 | 171 | PR1428-A 1/2 | ADHESIVE SEALANT | 3 | PINT-KIT | $ 1.440.272,15 | $ 4.320.816,45 |
| 9 | INSCRITO PEDIDO 1 | 192 | PR-1440B-1/2. | ADHESIVE SEALANT | 4 | QT / KIT | $ 1.566.994,19 | $ 6.267.976,76 |
| 10 | INSCRITO PEDIDO 1 | 201 | D-321 R | MOLYKOTE Anti-Friction Coating Spray, 312 gm | 5 | EA | $ 370.694,91 | $ 1.853.474,55 |
| 11 | INSCRITO PEDIDO 1 | 212 | 80183 | PLASTIC CLEANER , 16 OZ | 50 | TB | $ 300.380,85 | $ 15.019.042,50 |
| 12 | INSCRITO PEDIDO 1 | 219 | PR-1428, CLASS B-2 | ADHESIVE SEALANT | 2 | QT / KIT | $ 2.707.549,50 | $ 5.415.099,00 |
| 13 | INSCRITO PEDIDO 1 | 223 | BRIZZE 300ML | AMBIENTADOR AEROSOL 300 ML | 100 | EA | $ 10.053,64 | $ 1.005.364,00 |
| 14 | INSCRITO PEDIDO 1 | 239 | 15W40 4T | ACEITE MOTOR | 40 | GL | $ 103.938,01 | $ 4.157.520,40 |
| 15 | INSCRITO PEDIDO 1 | 243 | PR-1440B-2 | ADHESIVE SEALANT | 5 | QT / KIT | $ 1.540.189,56 | $ 7.700.947,80 |
| 16 | INSCRITO PEDIDO 1 | 253 | SAE20W50 | ACEITE MOTOR | 30 | GL | $ 126.520,90 | $ 3.795.627,00 |
| 17 | INSCRITO PEDIDO 1 | 269 | SUPERKOTE 2000 | REFRIGERANTE MOTOR | 20 | GL | $ 56.598,97 | $ 1.131.979,40 |
| 18 | INSCRITO PEDIDO 1 | 274 | DPAS-30W | TAPAOIDOS | 5 | BOX | $ 823.569,44 | $ 4.117.847,20 |
| 19 | INSCRITO PEDIDO 1 | 283 | 00116 | LUBRICANT,SOLID FILM LPS1 | 68 | EA | $ 117.015,30 | $ 7.957.040,40 |
| 20 | INSCRITO PEDIDO 1 | 320 | RTV108 | Momentive Sealant RTV108 Translucent, 2.8 oz tube | 2 | TB | $ 269.064,07 | $ 538.128,14 |
| 21 | INSCRITO PEDIDO 2 | 8 | DRILLS No 40 | DWDCO40 | 80 | EA | $ 4.176,42 | $ 334.113,60 |
| 22 | INSCRITO PEDIDO 2 | 25 | DRILLS 3/32 | DWDCO3/32 | 80 | EA | $ 4.176,42 | $ 334.113,60 |
| 23 | INSCRITO PEDIDO 2 | 38 | DRILLS No 20 | DWDCO20 | 50 | EA | $ 6.425,26 | $ 321.263,00 |
| 24 | INSCRITO PEDIDO 2 | 45 | DRILLS No 30 | DWDCO30 | 80 | EA | $ 4.899,26 | $ 391.940,80 |
| 25 | INSCRITO PEDIDO 2 | 62 | LAMP | MS25237-327 | 500 | EA | $ 16.522,96 | $ 8.261.480,00 |
| 26 | INSCRITO PEDIDO 2 | 64 | DRILLS 5/16 | DWDCO5/16 | 12 | EA | $ 17.348,20 | $ 208.178,40 |
| 27 | INSCRITO PEDIDO 2 | 70 | DRILLS 1/8 | DWDCO1/8 | 50 | EA | $ 5.461,47 | $ 273.073,50 |
| 28 | INSCRITO PEDIDO 2 | 87 | DRILLS 5/32 | DWDCO5/32 | 100 | EA | $ 6.104,00 | $ 610.400,00 |
| 29 | INSCRITO PEDIDO 2 | 105 | CEPILLO DE CERDA DE BRONCE | CEPILLO CERDA METALICA | 24 | EA | $ 6.519,75 | $ 156.474,00 |
| 30 | INSCRITO PEDIDO 2 | 112 | BROCA No 5/32 TALADRO DE 90 | TSD5/32ST | 12 | EA | $ 15.340,30 | $ 184.083,60 |
| 31 | INSCRITO PEDIDO 2 | 126 | CABLE X 1000 FT | M27500-22TG2T14 | 1 | RO | $ 3.678.625,98 | $ 3.678.625,98 |
| 32 | INSCRITO PEDIDO 2 | 130 | BROCA LETRA D TALADRO DE 90 | TSDDST | 12 | EA | $ 20.882,09 | $ 250.585,08 |
| 33 | INSCRITO PEDIDO 2 | 145 | DRILLS 3/16 | DWDCO3/16 | 50 | EA | $ 7.228,42 | $ 361.421,00 |
| 34 | INSCRITO PEDIDO 2 | 182 | DRILLS No 10 | DWDCO10 | 12 | EA | $ 8.272,52 | $ 99.270,24 |
| 35 | INSCRITO PEDIDO 2 | 195 | LOCK WIRE | MS20995C25 | 5 | LB | $ 61.013,68 | $ 305.068,40 |
| **VALOR TOTAL RECIBIDO** | | | | | | | | **$ 95.309.578,58** |


- Mediante correo electrónico enviado el día 09/11/2023 al correo diran.aravi-ped@policia.gov.co el contratista solicita la aceptación del parte alterno 1763709-01 al parte 3070542-01

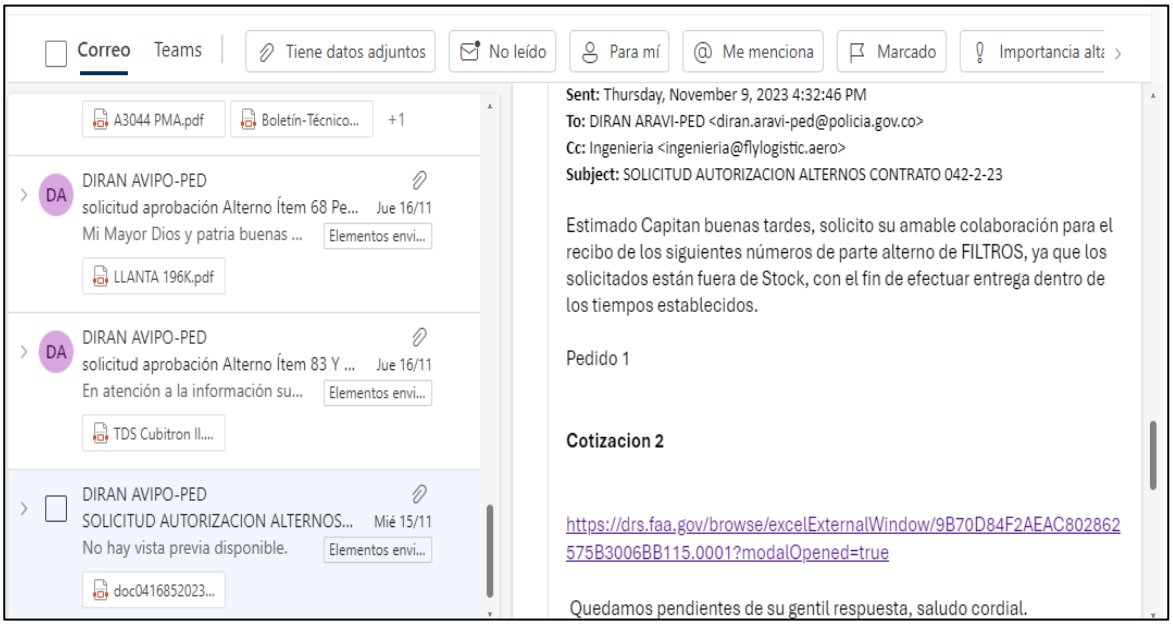



- Mediante correo electrónico enviado el día 14/11/2023 al correo diran.avipo-ped@policia.gov.co el contratista solicita la aceptación de parte alterno para los ítems 107 del pedido 1, de la cotización 2 parte número A3044 e item 3 pedido 3 stanicoil EP-5, de lo cual el contratista adjunta las fichas técnicas de cada elemento para ser verificadas por esta supervisión.

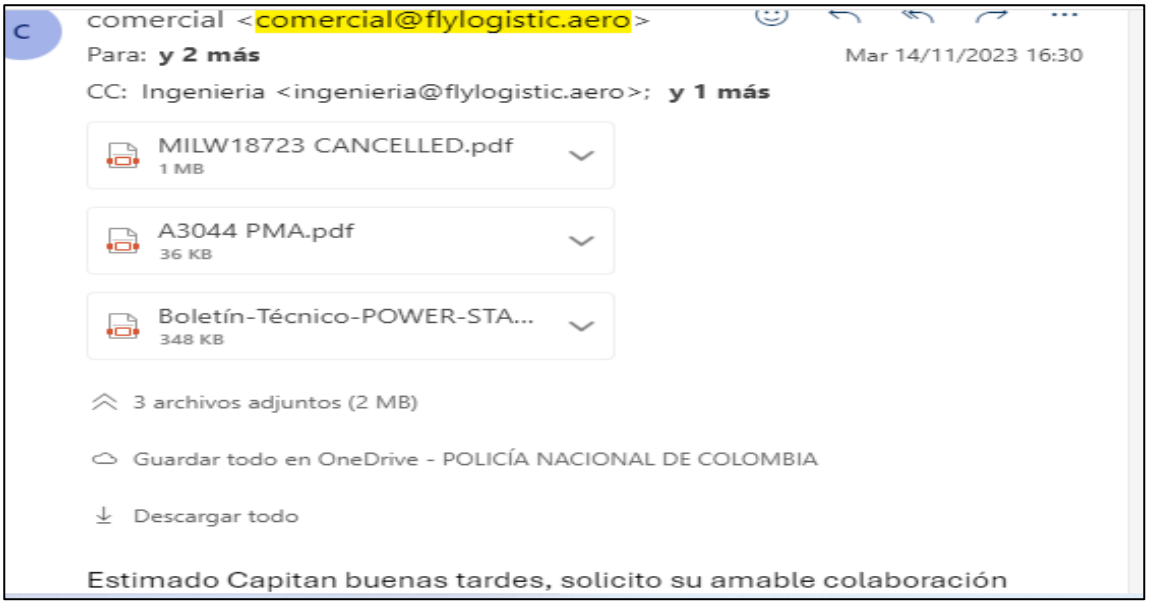

- Mediante correo electrónico enviado el día 15/11/2023 al correo diran.avipo-ped@policia.gov.co el contratista solicita la aceptación de parte alterno para el ítem 68 del pedido No 3 de parte 196K02B1

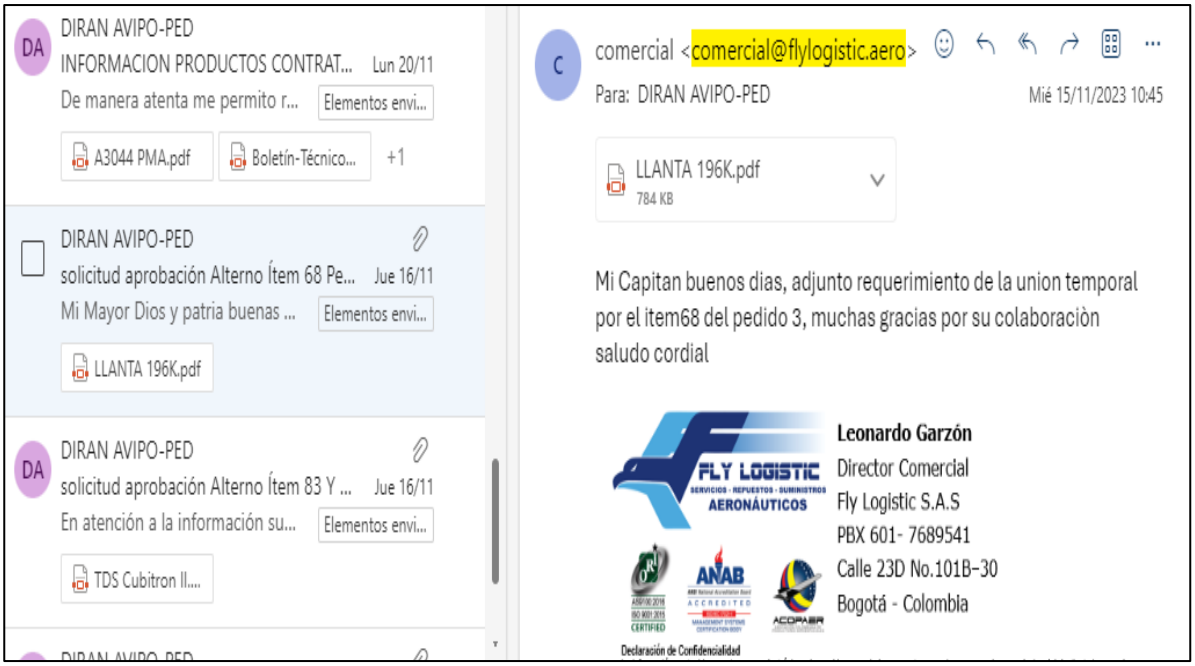


- Mediante correo electrónico enviado el día 16/11/2023 al correo diran.avipo-ped@policia.gov.co el contratista solicita la aceptación de parte alterno para los ítems 83 y 84 del pedido No 4.

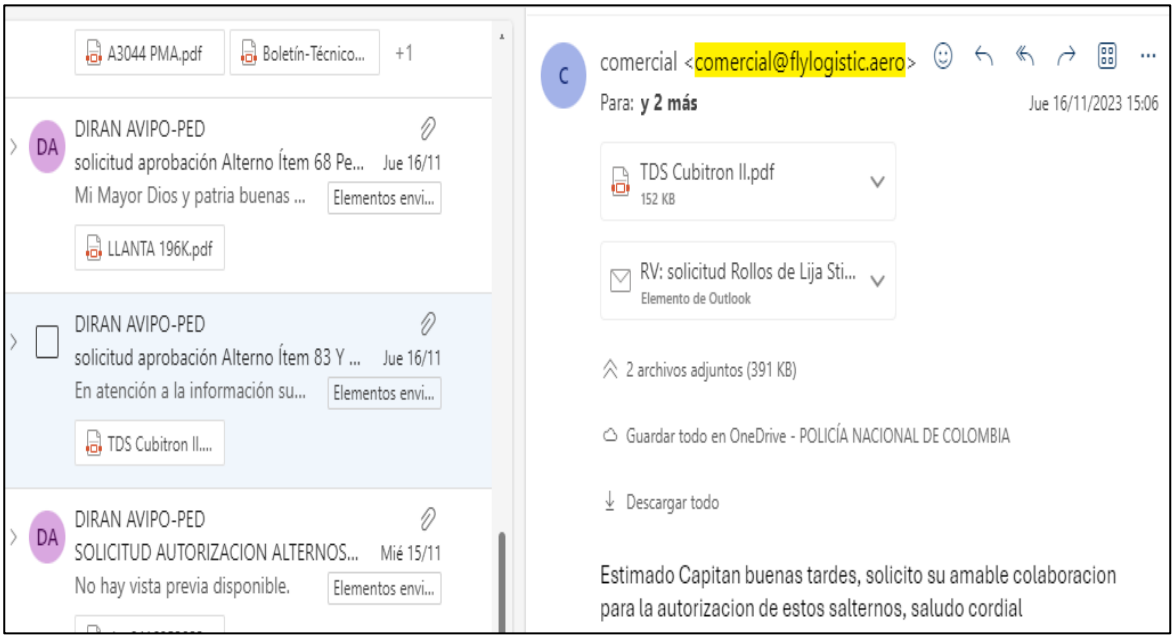

- Mediante correo electrónico enviado el día 20/11/2023 al correo diran.avipo-ped@policia.gov.co el contratista solicita la aceptación de parte alterno para el producto sata overalls.



comercial <comercial@flylogistic.aero>
Para: **y 2 más**
Lun 20/11/2023 11:06


Kleenguard A40 Reflex FTécn...
309 KB

Capitan buen dia, solicito su amable ayuda para la autorizacion del siguiente item, gracias

**Leonardo Garzón**
Director Comercial
Fly Logistic S.A.S
PBX 601- 7689541
Calle 23D No.101B-30
Bogotá - Colombia

**Declaración de Confidencialidad**
La información contenida en este correo electrónico y los archivos asociados con este mensaje son para el uso exclusivo del destinatario y puede contener información privilegiada o confidencial sujeta a derechos de autor o constitutiva de secreto comercial protegida por la ley. Está estrictamente prohibido cualquier uso no autorizado, revelación, copia o distribución de este mensaje y sus archivos asociados. Si usted cree que

- Mediante correo electrónico enviado el día 22/11/2023 al correo diran.avipo-ped@policia.gov.co el contratista solicita la aceptación de parte alterno para el ítem de parte 17,00x16 Tire.

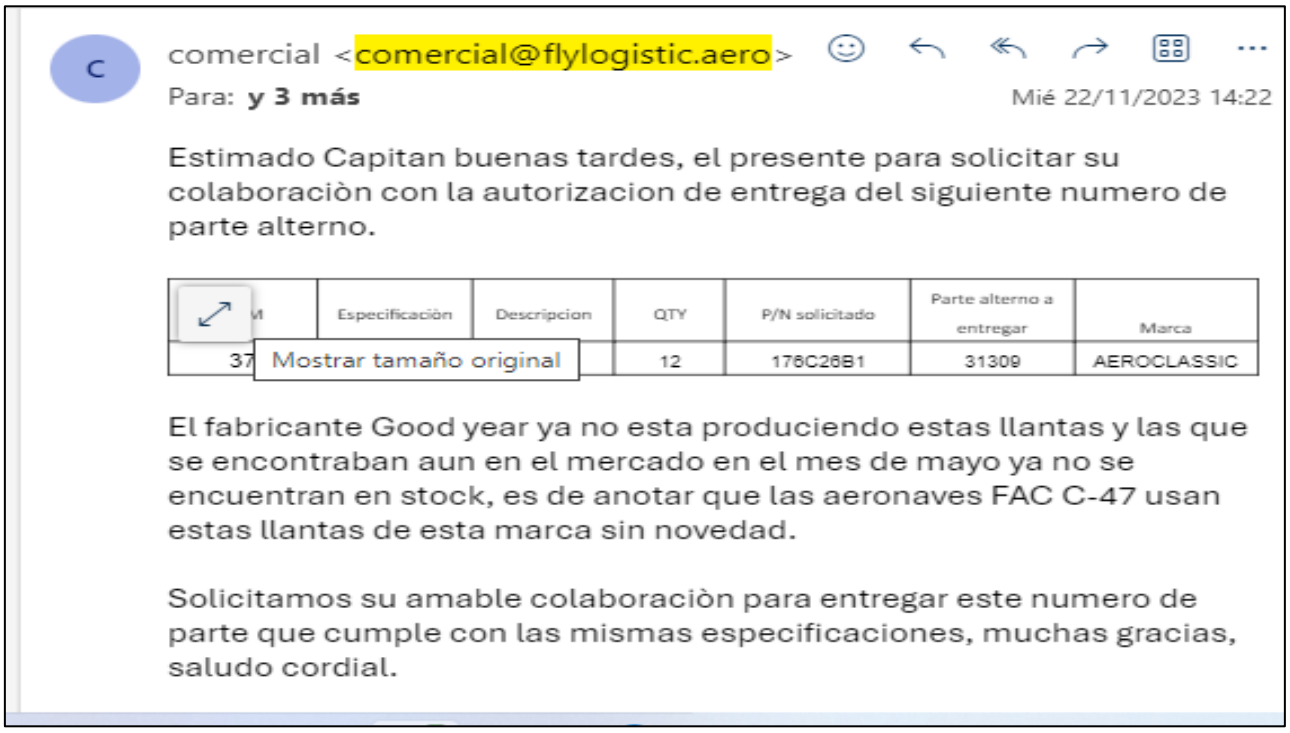

comercial <comercial@flylogistic.aero>
Para: **y 3 más**
Mié 22/11/2023 14:22

Estimado Capitan buenas tardes, el presente para solicitar su colaboraciòn con la autorizacion de entrega del siguiente numero de parte alterno.

| M | Especificación | Descripcion | QTY | P/N solicitado | Parte alterno a entregar | Marca |
|---|---|---|---|---|---|---|
| 37 | | | 12 | 176C26B1 | 31309 | AEROCLASSIC |

Mostrar tamaño original

El fabricante Good year ya no esta produciendo estas llantas y las que se encontraban aun en el mercado en el mes de mayo ya no se encuentran en stock, es de anotar que las aeronaves FAC C-47 usan estas llantas de esta marca sin novedad.

Solicitamos su amable colaboraciòn para entregar este numero de parte que cumple con las mismas especificaciones, muchas gracias, saludo cordial.

- El contratista realiza la entrega del siguiente material el día 24/11/2023, en las instalaciones de la Compañía Antinarcóticos de aviación Bogotá.

| No DE CONTRATO 042-2-2023 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| CONTRATISTA : UNION TEMPORAL CONSUMIBLES AERONAUTICOS PONAL 2023 | | | | | | | | |
| ENTREGA 10 (COAGY) 24/11/2023 | | | | | | | | |
| Ítem | CONTRATO | | Parte No. | Descripción | U/M | CANT | VALOR UNITARIO | VALOR TOTAL |
| | No. | Ítem | | | | | | |
| 1 | INSCRITO PEDIDO 1 | 54 | 328Q28-2 | TIRE | 20 | EA | $ 11.146.642,79 | $ 222.932.855,80 |
| 2 | INSCRITO PEDIDO 1 | 202 | 19.5 X 6.75-8 / -10 | TIRE | 29 | EA | $ 4.070.293,92 | $ 118.038.523,68 |
| 3 | INSCRITO PEDIDO 1 | 37 | 17,00X16 | TIRE | 4 | EA | $ 21.939.650,36 | $ 87.758.601,44 |
| **TOTAL RECIBIDO** | | | | | | | | **$ 428.729.980,92** |

- El contratista realiza la entrega del siguiente material el día 27/11/2023, en las instalaciones de la Compañía Antinarcóticos de aviación Guaymaral.


| No DE CONTRATO 042-2-2023 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| CONTRATISTA : UNION TEMPORAL CONSUMIBLES AERONAUTICOS PONAL 2023 | | | | | | | | |
| ENTREGA 11 (COAGY) 27/11/2023 | | | | | | | | |
| Ítem | CONTRATO | | Parte No. | Descripción | U/M | CANT | VALOR UNITARIO | VALOR TOTAL |
| | No. | Ítem | | | | | | |
| 1 | INSCRITO PED 1 | 206 | HYSOL 934 | Aero Epoxy Paste Adhesive, Quart Kit | QT/KIT | 10 | $ 1.555.212,51 | $ 15.552.125,10 |
| 2 | INSCRITO PED 2 | 30 | CPC | CPC GRADO 2 | GL | 5 | $ 718.589,60 | $ 3.592.948,00 |
| 3 | INSCRITO PED 2 | 129 | LIMPIADOR DE TAPICERIA | LIMPIADOR DE TAPICERIA ESPUMA 400ml | EA | 100 | $ 25.417,57 | $ 2.541.757,00 |
| 4 | INSCRITO PED 2 | 254 | 038088-08 | FILTER | EA | 30 | $ 768.241,85 | $ 23.047.255,50 |
| 5 | INSCRITO PED 2 | 257 | MIL-PRF-16173 GR1 / GL | CPC ANTICORROSIVO GRADO 1 | GL | 5 | $ 675.597,06 | $ 3.377.985,30 |
| 6 | INSCRITO PED 2 | 123 | CEE BEE R-256 | REMOVEDOR DE PINTURA X 5 GL | PL | 5 | $ 1.889.781,98 | $ 9.448.909,90 |
| 7 | INSCRITO PED 2 | 217 | POLIURETANO BEIGE BRILLANTE | MIL-PRF-85285E TYPE I-IV 17886 | KIT | 5 | $ 1.322.847,39 | $ 6.614.236,95 |
| 8 | INSCRITO PED 2 | 292 | POLIURETANO AMARILLO | 31363YPX-T1 | KIT | 4 | $ 1.511.825,58 | $ 6.047.302,32 |
| 9 | MOD 1 PED 3 | 33 | GALLONS & DECIMALCRISTAL | 324695-015 | EA | 20 | $ 3.117.520,00 | $ 62.350.400,00 |
| 10 | MOD 1 PED 3 | 55 | CLEANER | AMS1476B | PL | 1 | $ 3.703.520,00 | $ 3.703.520,00 |
| 11 | MOD 1 PED 3 | 76 | DISCO VELCRO 5" GRANO 180 | 5"-180 | EA | 100 | $ 5.979,65 | $ 597.965,00 |
| 12 | MOD 1 PED 3 | 77 | DISCO VELCRO 5" GRANO 320 | 5"-320 | EA | 82 | $ 6.822,37 | $ 559.434,34 |
| 13 | MOD 1 PED 3 | 78 | TAPABOCAS BLANCO | N95 | EA | 100 | $ 20.920,00 | $ 2.092.000,00 |
| 14 | MOD 2 PED 4 | 2 | CINTA METALICA | 4130884N | EA | 2 | $ 452.325,00 | $ 904.650,00 |
| 15 | MOD 2 PED 4 | 5 | ABRASIVE PAD | BEAR TEX | EA | 10 | $ 70.219,71 | $ 702.197,10 |


| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 16 | MOD 2 PED 4 | 12 | MOBIL SCH100 | SHC-100 | EA | 2 | $ 1.000.387,50 | $ 2.000.775,00 |
| 17 | MOD 2 PED 4 | 48 | PAÑOS MICROFIBRA 35.6 X 35.6CM | COMERCIAL | EA | 30 | $ 4.625,00 | $ 138.750,00 |
| 18 | MOD 2 PED 4 | 49 | LEATHER SOAP (leather and vinil cleaner) | COMERCIAL | EA | 4 | $ 377.714,34 | $ 1.510.857,36 |
| 19 | MOD 2 PED 4 | 70 | LACA AMARILLA | 7501 | EA | 3 | $ 252.820,38 | $ 758.461,14 |
| 20 | MOD 2 PED 4 | 71 | LACA ROJA | 7508 | EA | 3 | $ 225.575,63 | $ 676.726,89 |
| 21 | MOD 2 PED 4 | 72 | LACA AZUL | 7527 | EA | 3 | $ 289.936,97 | $ 869.810,91 |
| 22 | MOD 2 PED 4 | 73 | LACA NEGRO MATE | 7589 | EA | 3 | $ 242.909,66 | $ 728.728,98 |
| 23 | MOD 2 PED 4 | 74 | LACA BLANCA | 7519 | EA | 3 | $ 226.586,13 | $ 679.758,39 |
| 24 | MOD 2 PED 4 | 77 | BULTO DE TRAPO | BULTO DE TRAPO | BULTO | 50 | $ 462.500,00 | $ 23.125.000,00 |
| 25 | MOD 2 PED 4 | 87 | Espátula metálica con mango de madera 2200000017024 | Espátula metálica con mango de madera 2200000017024 | EA | 13 | $ 62.123,00 | $ 807.599,00 |
| 26 | MOD 2 PED 4 | 90 | CLEANER K&N | 99-0635 / 99-0640 | GL | 4 | $ 1.665.290,54 | $ 6.661.162,16 |
| 27 | MOD 2 PED 4 | 92 | PINTURA AMARILLO TRAFICO PESADO PARA EXTERIOR | PINTURA AMARILLO TRAFICO PESADO PARA EXTERIOR | GL | 5 | $ 471.750,00 | $ 2.358.750,00 |
| **VALOR TOTAL RECIBIDO** | | | | | | | | **$ 181.449.066,34** |

**5.2. Actividades Desarrolladas por el Supervisor o Interventor**

- Los elementos entregados el día 08/11/2023, en la Compañía Antinarcóticos de Aviación Policial, son recepcionadoS sin ninguna novedad.

- Mediante correo electrónico del 15/11/2023, esta supervisión solicita aprobación del parte alterno para la llanta 196K02B1, al señor Intendente Fernando Figueroa , jefe grupo línea legacy 600, el cual no acepta el parte alterno por no encontrarse dentro del manual, situación informada al contratista mediante correo electrónico.

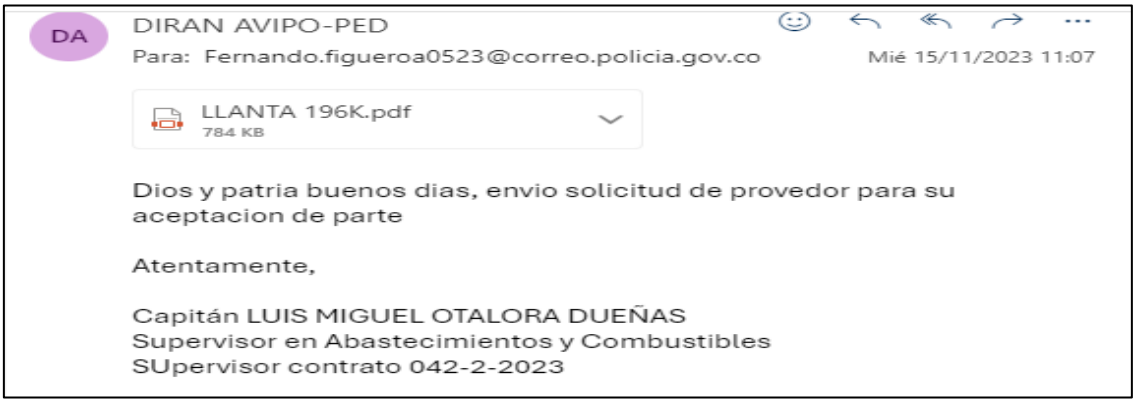

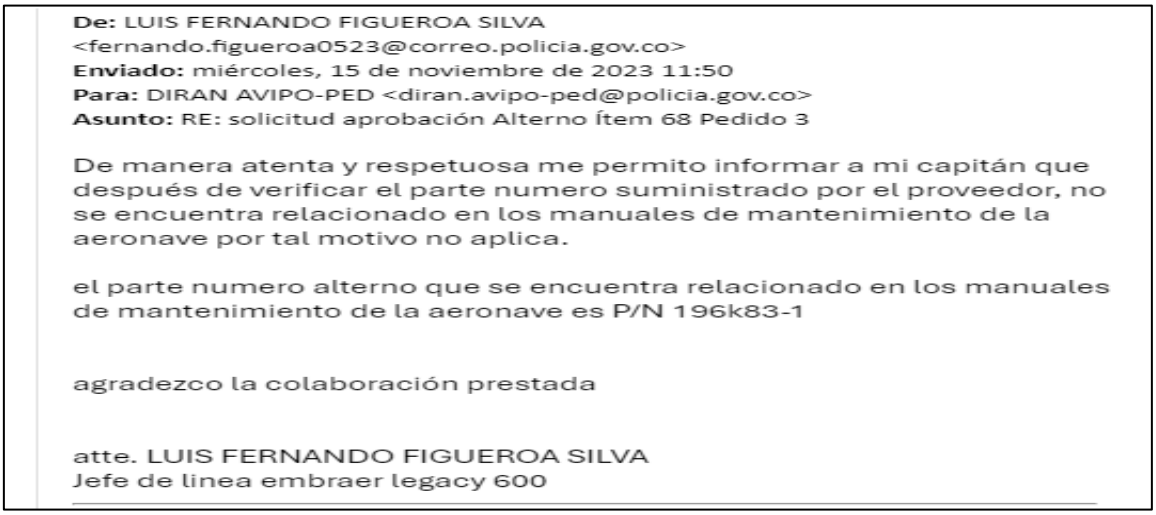


**De:** LUIS FERNANDO FIGUEROA SILVA
<fernando.figueroa0523@correo.policia.gov.co>
**Enviado:** miércoles, 15 de noviembre de 2023 11:50
**Para:** DIRAN AVIPO-PED <diran.avipo-ped@policia.gov.co>
**Asunto:** RE: solicitud aprobación Alterno Ítem 68 Pedido 3

De manera atenta y respetuosa me permito informar a mi capitán que después de verificar el parte numero suministrado por el proveedor, no se encuentra relacionado en los manuales de mantenimiento de la aeronave por tal motivo no aplica.

el parte numero alterno que se encuentra relacionado en los manuales de mantenimiento de la aeronave es P/N 196k83-1

agradezco la colaboración prestada

atte. LUIS FERNANDO FIGUEROA SILVA
Jefe de linea embraer legacy 600

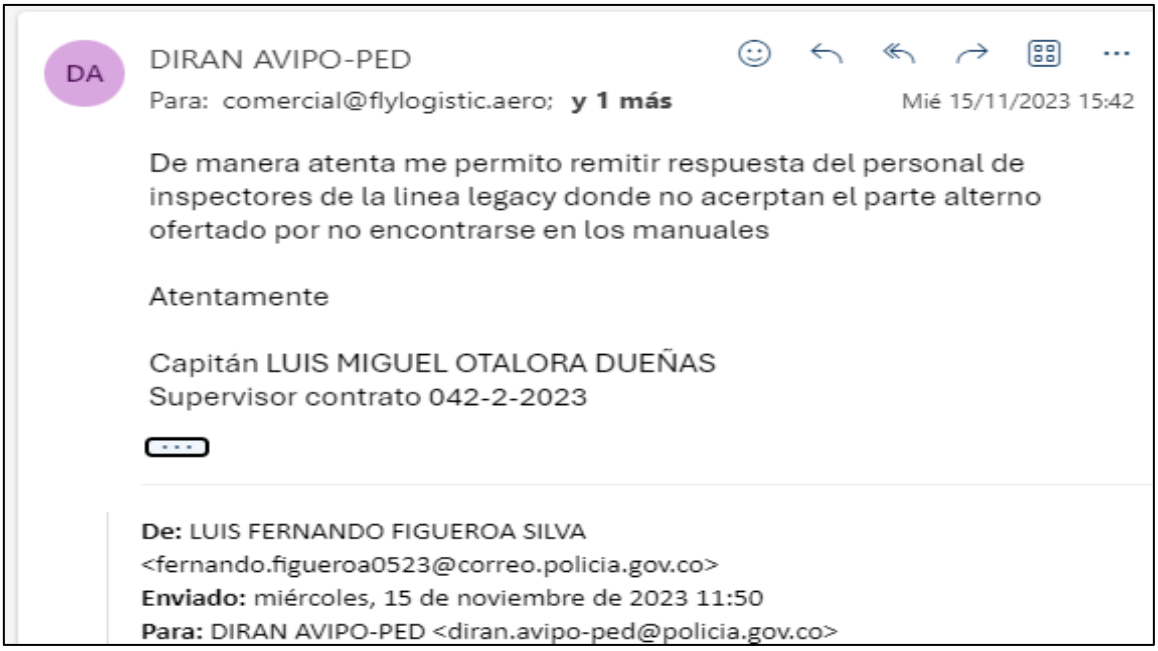

DA

DIRAN AVIPO-PED

Para: comercial@flylogistic.aero; **y 1 más** Mié 15/11/2023 15:42

De manera atenta me permito remitir respuesta del personal de inspectores de la linea legacy donde no acerptan el parte alterno ofertado por no encontrarse en los manuales

Atentamente

Capitán LUIS MIGUEL OTALORA DUEÑAS
Supervisor contrato 042-2-2023

**De:** LUIS FERNANDO FIGUEROA SILVA
<fernando.figueroa0523@correo.policia.gov.co>
**Enviado:** miércoles, 15 de noviembre de 2023 11:50
**Para:** DIRAN AVIPO-PED <diran.avipo-ped@policia.gov.co>

Asi mismo, mediante correos electrónicos remitidos al personal de combustibles de aviación el señor Intendente Jefe Fernando Patiño, señora Intendente Paola Castiblanco Jefe grupo línea Beechcraft y señor Intendente Jefe Oscar Roncancio, técnico básico de mantenimiento línea bell 407/2026, se remite la información para la aceptación de los alternos del 14/11/2023, obteniendo la aceptación de los materiales para combustible y beechcraft.

**De:** DIRAN AVIPO-PED <diran.avipo-ped@policia.gov.co>
**Enviado:** miércoles, 15 de noviembre de 2023 11:48
**Para:** LUIS FERNANDO PATIÑO MEJIA <fernando.patino@correo.policia.gov.co>
**Asunto:** RV: INFORMACION PRODUCTOS CONTRATOS Y SOLICITUD ALTERNOS

De manera atenta me permito remitir informacion remitida por el proveddor, para ser aprobada por el señor Intedente. lo anterior se requiere con plazo 14:00 horas

Atentamente

Capitán LUIS MIGUEL OTALORA DUEÑAS
Supervisor COntrato 042-2-2023

---

Bogotá D.C., 15 de noviembre 2023

Dios y Patria Policía Nacional Cordial saludo,

En atención al correo electónico sin número de fecha 15 de noviembre 2023 donde se solicita dar respuesta remitida por el provedor, de manera atenta me permito informar a mi capitán, que una vez verificada las condiciones técnicas del producto ISO 220 POWER STANICOIL EP 5, este se ajusta al requerido.

Atentamente,

Dios y Patria

Intendente Jefe
**LUIS FERNANDO PATIÑO MEJIA**
Inspector Combustibles de Aviación
Teléfono: 311 2141692
fernando.patino@correo.policia.gov.co

---

Reenvió este mensaje el Lun 20/11/2023 10:17.


JENNY PAOLA CASTIBLANCO CANO
<jenny.castiblanco@correo.policia.gov.co>
Para: DIRAN AVIPO-PED
Jue 16/11/2023 18:10

Dios y patria
Buenas tardes


De manera atenta me permito informar, que revisado el manual de mantenimiento para las aeronaves de la línea Beechcraft, este parte número aplica siendo un alterno al que suministra el manual.

Gracias.
Obtener Outlook para Android

-Mediante correo electrónico esta supervisión informa al contratista que se aceptan los partes alternos ofrecidos en el correo del 16/11/2023, teniendo en cuenta que cumplen con las características técnicas solicitadas de las lijas stick grano 180 y de 320.

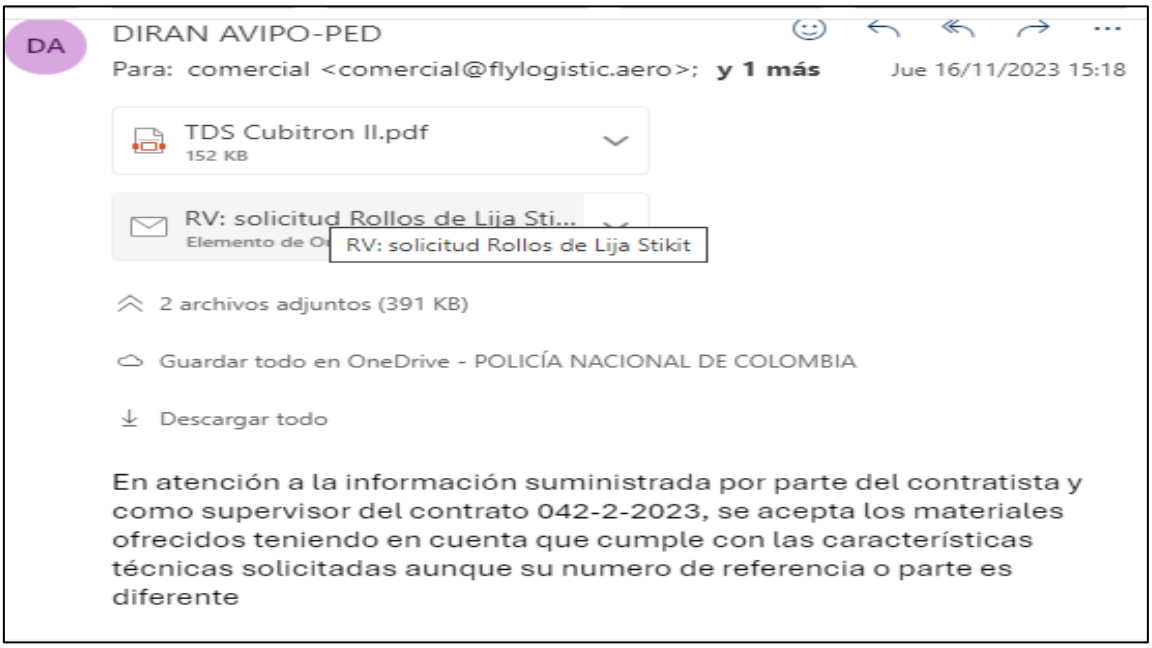


- Mediante correo electrónico del 20/11/2023, y de acuerdo a lo informado por el personal técnico de la línea bell 407/206 se cancela el elemento MIL-W-18723, teniendo en cuenta que el producto fue descontinuado y el personal de la línea no conoce otro producto que lo supla.

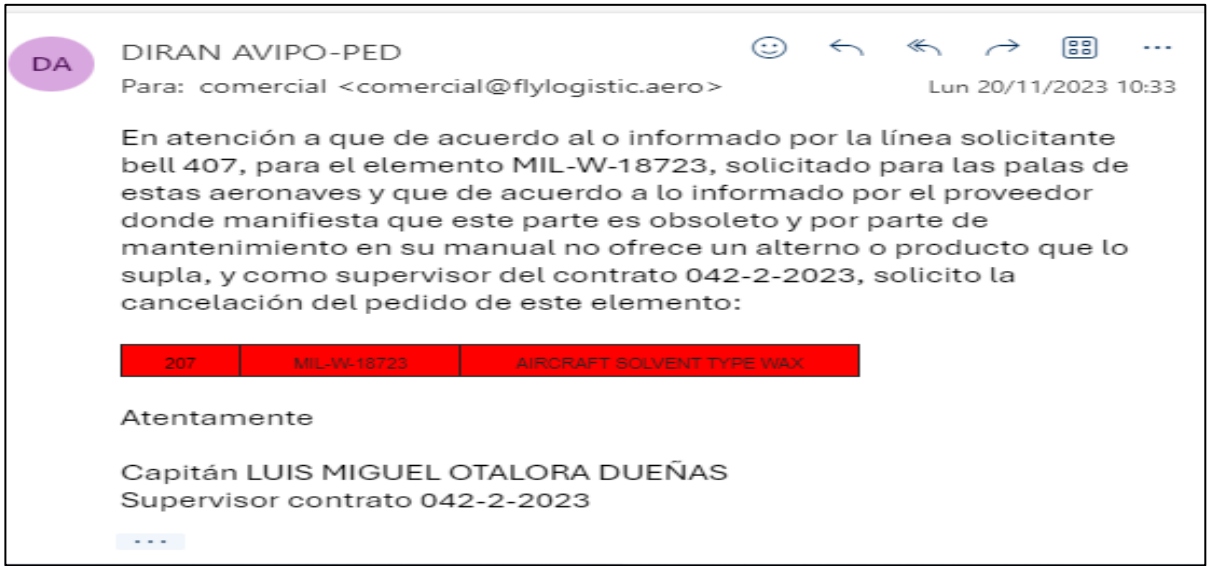

- Mediante comunicado oficial No GS-2023-134722-DIRAN del 21 de noviembre de 2022, se remite al correo comercial@flylogistico.aero el pedido No 4, el cual consta de 96 ítems, elementos inscritos mediante modificatorio No 2.

- Mediante correo electrónico del 23/11/2023, esta supervisión acepta el parte alterno ofertado por el contratista de la llanta 17,00X16 remitido mediante correo electrónico del 15/11/2023, de acuerdo a lo informado por parte del personal de mantenimiento de la línea DC3 señor subintendente Adalberto Cervantes.

**From:** DIRAN AVIPO-PED <diran.avipo-ped@policia.gov.co>
**Sent:** Thursday, November 23, 2023 11:39:09 AM
**To:** ADALBERTO CERVANTES VALDIVIES
<adalberto.cervantes3026@correo.policia.gov.co>
**Subject:** RV: SOLICITUD AUTORIZACION PARTE ALTERNO LLANTA

Dios y patria

De manera atenta me permito solicitar al señor Inspector verificar la información enviada por el contratista con el fin de aceptar o rechazar el parte alterno ofertado, atendiendo que el producto ya no se encuentra en el mercado, lo anterior se requiere con plazo 12:00 hrs

Atentamente


Capitán LUIS MIGUEL OTALORA DUEÑAS
Supervisor Contrato 042-2-2023

Supervisor contrato 042-2-2023

**De:** ADALBERTO CERVANTES VALDIVIES
<adalberto.cervantes3026@correo.policia.gov.co>
**Enviado:** jueves, 23 de noviembre de 2023 12:01
**Para:** DIRAN AVIPO-PED <diran.avipo-ped@policia.gov.co>
**Asunto:** Re: SOLICITUD AUTORIZACION PARTE ALTERNO LLANTA

Dios y patria, buenos días.
De manera atenta y respetuosa me permito informar a mi Capitán, que después de revisados los manuales técnicos de la aeronave y documentación miscelánea, que el parte número y la marca que ofrecen como alterno si se pueden utilizar en las aeronaves de la institución.
Att

Subintendente ADALBERTO CERVANTES VALDIVIES
Inspector de Mantenimiento DC3-TP

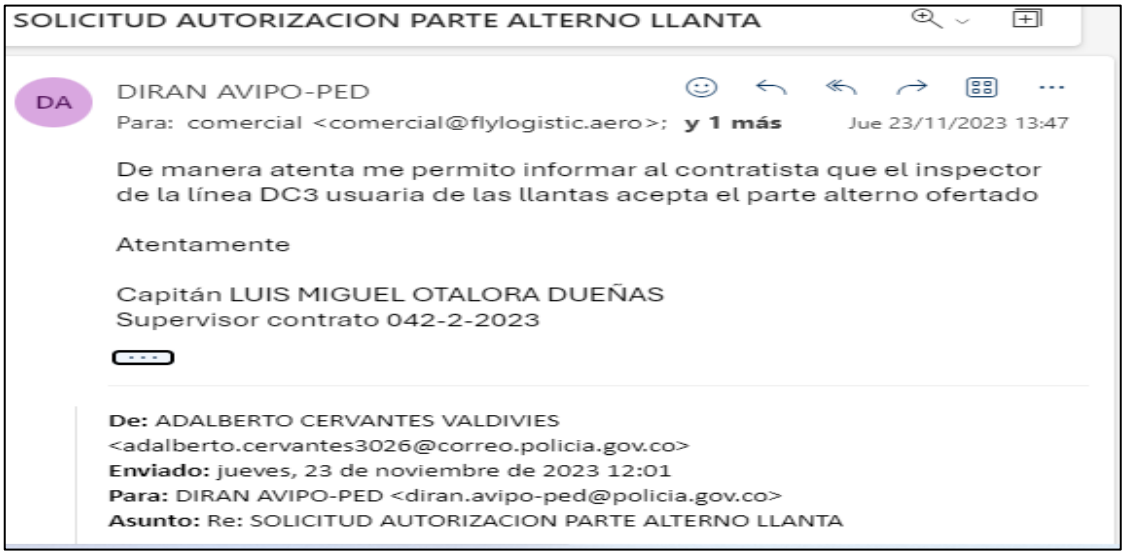


- Los elementos entregados el día 24/11/2023, en la Compañía Antinarcóticos de Aviación Policial Bogotá, son recepcionados sin ninguna novedad.

-Los elementos entregados el día 27/11/2023, en la Compañía Antinarcóticos de Aviación Policial Guaymaral, son recepcionados sin ninguna novedad.

**5.3. Actividades a realizar en los contratos de Mantenimientos preventivos y correctivos.**

**5.3.1 Especificar el tipo de Mantenimiento realizado:**

| Tipo de Mantenimiento | Marque con una X el mantenimiento correspondiente | Descripción de actividades Desarrolladas |
|---|---|---|
| Preventivo | N/A | N/A |
| Correctivo | N/A | N/A |
| Preventivo y Correctivo | N/A | N/A |

**5.3.2. Incluir cotizaciones del mercado cuando se requiera elementos no contemplados inicialmente en el contrato y este lo permita, anexar la información de costos y usos finales.**

Este numeral no aplica para el presente informe de supervisión

**5.4 Manifestar la verificación y el cumplimiento total de las especificaciones técnicas de los bienes y servicios recibidos de acuerdo al contrato en su totalidad** (aquí se relaciona todo el componente técnico ya sea bienes y servicios, en el cual el supervisor literal por literal, manifiesta la verificación y el cumplimiento de cada requerimiento por parte del Contratista)**.**

**NOTA:** Para el mes de noviembre de la presente vigencia, se realiza la calificación del cumplimiento de las especificaciones técnicas de los ítems relacionados, toda vez que se han recibido elementos consumibles según lo estipulado en el contrato de suministro No. 042-2-2023 de manera parcial, por otro lado, es importante aclarar que los ítems que se encuentran como no marcados son aquellos que están próximos a ser solicitados y/o entregados.

**ANEXO ESPECIFICACIONES TÉCNICAS ANEXO No. 01**

| ITEM | NÚMERO DE PARTE | DESCRIPCIÓN | U/M | ESPECIFICACIÓN TÉCNICA | CUMPLE |
|---|---|---|---|---|---|
| 1 | AMS-QQ-A-250-2024-T3-0.032 | SHEET METAL | EA | Lamina de aluminio 2024-T3 de 0.032 de 48" X 144" - (4 X 12 ft.) | X |
| 2 | 10605000 | Tape, Adhesive, Reflectorized Sheeting | RO | Tape, Adhesive, Reflectorized Sheeting | No pedido |
| 3 | 284-50 | FIBRA DE CARBON / STYLE 284-50 X 50 YARDAS | RO | FIBRA DE CARBON / STYLE 284-50 X 50 YARDAS, presentacion rollo | No pedido |
| 4 | HCX-46 FRANING | FILTRO DE ACEITE | EA | FILTRO DE ACEITE | X |
| 5 | MIL-PRF-85285E Type I- IV 15048 | POLIURETANO AZUL | KIT | Coating with excellent chemical resistance, outstanding toughness, flexibility, abrasion resistance, and excellent outside durability. Conforms to MIL-PRF-85285E Type I- IV, Mix Ratio: 3 : 1 by Volume, Application Thickness: 1.8 - 2.3 mils, Theoretical Coverage: 800-900 ft2 @ 1 mil, Impact Flexibility: 40% Elongation @ RT, Low-Temp Flexibility: 1" mandrel bend @ -65°F | X |
| 6 | AMS-QQ-A-250/6 | SHEET METAL 0,025 | EA | Lamina de aluminio AMS-QQ-A-250/6, 0,025 | No pedido |
| 7 | DWDCO | DRILLS 27/64 | EA | BROCA COBALTO DWDCO SERIES 27/64 | |
| 8 | DWDCO40 | DRILLS No 40 | EA | BROCA COBALTO DWDCO SERIES No 40 | X |
| 9 | 205-076-034-007 | FILTER | EA | FILTER | No pedido |
| 10 | HCS2101-04-60V | FILM, BAGGING NYLONX 1000FT (APPROX 333YDS) | RO | High temperature Nylon Film which can be used for cures up to 401 °F (205 °C), Tensile Strength 80MPa, Elongation MD: 300%, TD: 300% Width 30 in (open 60 in) | No pedido |
| 11 | AS3209-144 | PACKING OIL ESCAVATION | EA | PACKING OIL ESCAVATION | |
| 12 | MS20995C20 | LOCK WIRE | LB | MS20995C20 Stainless Steel 0.020" Diameter Safety Wire - 1 lb Roll | X |
| 13 | MS28775-015 | O-RING | EA | O-RING | X |
| 14 | 11.00-12 | TIRE | EA | TIRE 11.00-12 PLY RATING 10,Rated Speed (MPH) 160, Maximum Braking Load (Lbs) 11890, Rated Inflation (PSI) 60 | X |
| 15 | PA2824 | FILTRO DE AIRE | EA | FILTRO DE AIRE | X |

| | | | | | |
|---|---|---|---|---|---|
| 16 | MIL-H-83282 | HIDRAULICO 782 | QT | ROYCO 782 is synthetic hydraulic fluid developed to meet the severe duty demands of today's military and industrial equipment, suitable for use in applications operating at temperatures from -40°C to 205°C, qualified to MIL-SPEC: MIL-PRF-83282D | X |
| 17 | LOCTITE SF 7649 | Activador a base de disolvente / 4,5 OZ | EA | Activador para adhesivos y selladores anaeróbicos de Loctite,peso específico @ 25 °C 0,79, Viscosidad @ 20 °C, mPa·s (cP) 2, Tiempo de Secado a 20 °C, segundos 30 y 70 | |
| 18 | MIL-PRF-85285E Type I- IV 37038 | POLIURETANO NEGRO MATE | KIT | Coating with excellent chemical resistance, outstanding toughness, flexibility, abrasion resistance, and excellent outside durability. Conforms to MIL-PRF-85285E Type I- IV, Mix Ratio: 3 : 1 by Volume, Application Thickness: 1.8 - 2.3 mils, Theoretical Coverage: 800-900 ft2 @ 1 mil, Impact Flexibility: 40% Elongation @ RT, Low-Temp Flexibility: 1" mandrel bend @ -65°F | No pedido |
| 19 | 1-480698-0 | HOUSING FLUORESCENT LIGHTS | EA | HOUSING FLUORESCENT LIGHTS | No pedido |
| 20 | CR3553-5-8 | REMACHE PACK X 100 | EA | REMACHE PACK X 100 | No pedido |
| 21 | AS568-110 | O-RING | EA | O-RING | No pedido |
| 22 | MIL-PRF-85285E Type I- IV 17038 | POLIURETANO NEGRO BRILLANTE | KIT | Coating with excellent chemical resistance, outstanding toughness, flexibility, abrasion resistance, and excellent outside durability. Conforms to MIL-PRF-85285E Type I- IV, Mix Ratio: 3 : 1 by Volume, Application Thickness: 1.8 - 2.3 mils, Theoretical Coverage: 800-900 ft2 @ 1 mil, Impact Flexibility: 40% Elongation @ RT, Low-Temp Flexibility: 1" mandrel bend @ -65°F | No pedido |
| 23 | BT-339 | FILTRO DE ACEITE | EA | FILTRO DE ACEITE | X |
| 24 | AMS-QQ-A-250/6. | SHEET METAL 0,032 | EA | Lamina de aluminio AMS-QQ-A-250/6 0,032 | No pedido |
| 25 | DWDCO3/32 | DRILLS 3/32 | EA | BROCA COBALTO DWDCO SERIES 3/32 | X |
| 26 | DWDN35/64 | DRILLS 35/64 | EA | BROCA H.S.S DWDN SERIES 35/64 | |
| 27 | 459M08-2 | TIRE | EA | SIZE 450X190-5 PLY RATING 10,Rated Speed (MPH) 190, Maximum Braking Load (Lbs) 5400, Rated Inflation (PSI) 75 | X |
| 28 | MOBIL 28 | GREASE RED MOBIL 28 / 4.4 lb can | TRR | Supreme performance, high temperature, antiwear grease Oil Separation, 30 hr. at 177ºC, ASTM D 6184, vol-% 2.5, Evaporation Loss, ASTM D 2595, 22 hrs @ 177ºC, vol-% 5.2, COLOR RED | X |
| 29 | CR3553-5-10 | REMACHE PACK X 100 | EA | REMACHE PACK X 100 | No pedido |
| 30 | DWDACX61/16 | DRILLS 1/16 | EA | BROCA HSS DWDA/C SERIES 6" 1/16 | |
| 31 | HCS2114 | Flash Tape (cinta azul de composite) | RO | Polyester tape backed with a fully pressure silicone adhesive, Maximum cure temperature 400 °F (204 °C), Standard size 1 " x 72 YD | X |
| 32 | 3033356 | PARTS KIT,FLUID PRESSURE FILTER | EA | PARTS KIT,FLUID PRESSURE FILTER | X |
| 33 | FS1242 | FILTRO DE COMBUSTIBLE PRIMARIO | EA | FILTRO DE COMBUSTIBLE PRIMARIO | X |
| 34 | MS22759/16-2-9 | M22759/16-2-9 White Tape Coated Fiberglass X 100 MT | RO | White Tape Coated Fiberglass X 100 MT | No pedido |
| 35 | 99-4781-026 | PACKING | EA | PACKING | No pedido |

| | | | | | |
|---|---|---|---|---|---|
| 36 | AA-59166 TYPE II | POLIURETANO ANTIDESLIZANTE FD-37030 | KIT | Coating Compound, Nonslip, designed to meet A-A-59166, Type II, Volume Solids: 49.91 ± LO, Viscosity: 80-90 KU's, Weight Solids: 71.32 ± 1.0 | |
| 37 | 1700X16 | TIRE | EA | TIRE 17.00-16 PLY RATING 12,Rated Speed (MPH) 160, Maximum Braking Load (Lbs) 23200, Rated Inflation (PSI) 60 | X |
| 38 | DWDCO20 | DRILLS No 20 | EA | BROCA COBALTO DWDCO SERIES No 20 | X |
| 39 | MS24694S60 | SCREW,MACHINE | EA | SCREW,MACHINE | X |
| 40 | 350689-1 | SOCKET FLUORESCENT LIGHTS | EA | SOCKET FLUORESCENT LIGHTS | X |
| 41 | PC458 | CROCUS CLOTH 9" × 11" PACK X 5 | EA | Hojas de tela Crocus 9" × 11" PACK X 5 | X |
| 42 | FS20000 | FILTRO DE COMBUSTIBLE SECUNDARIOS | EA | FILTRO DE COMBUSTIBLE SECUNDARIO | X |
| 43 | M25988/1-152 | PACKING | EA | PACKING | No pedido |
| 44 | CR3553-5-9 | REMACHE PACK X 100 | EA | REMACHE PACK X 100 | No pedido |
| 45 | DWDCO30 | DRILLS No 30 | EA | BROCA COBALTO DWDCO SERIES No 30 | Recibido |
| 46 | 99-4346-152 | PACKING | EA | PACKING | No pedido |
| 47 | WD-40 | Lubricante Multiusos 382 ml/11 oz. | EA | Producto Multiusos lubrica piezas móviles como bisagras, ruedas, rodillos, cadenas y engranajes. Protege contra el óxido y la corrosión en elementos como herramientas y equipos, PUNTO DE EBULLICIÓN: 150°C (300° F), PUNTO DE INFLAMABILIDAD:59°C (138 °F ) (TCC) | X |
| 48 | AMS3374D Type 1 | Primerless Silicone Firewall Sealant - 6 oz Cartridge | EA | Adhesive, solvent-free, thixotropic silicone paste,used as a coating, sealant, or filleting material in the construction, repair and maintenance of all types of aircraft. Excellent fire resistance to 3500°F (1927°C),Service temperature of -65°F to 400°F (-54°C to 204°C) Qualified to BMS 5-63, AMS3374, BAMS 552-004, and CMNP009 | No pedido |
| 49 | MIL-T-6095 | THINNER EXTRAFINO DE 52 GL | DRUM | Blush retarding thinner used in thinning cellulose nitrate dopes and lacquers, Specific gravity. 0.843-0.859, Non-volatile content (max) 10 mg/100 ml | X |
| 50 | M25988/1-037 | PACKING | EA | PACKING | X |
| 51 | ASTM-D-329 | ACETONA X 5 GL | PAIL | Acetone technical Meets ASTM-D-329, Flash point 1°F, CAS 67-64-1, Specific Gravity 0,7918, Purity. 99,8% by Weight. | No pedido |
| 52 | DA7801 | FILTRO DE AIRE | EA | FILTRO DE AIRE | X |
| 53 | BMS-9-3-120 | BMS9-3 TYPE D STYLE 120 CLOTH FIBERGLASS 38" 136 Yards | RO | BMS 9-3 Style 120 is typically used for interior cabin structures including seats, luggage bins, bulkheads, lavatories, wall panels and in honeycomb structures. Weave Style 4 Harness Satin, Breaking Strength Warp 160 lbf/in | No pedido |
| 54 | 328Q28-2 | TIRE | EA | SIZE 32X8.8R16 PLY RATING 12,Rated Speed (MPH) 190, Maximum Braking Load (Lbs) 16500, Rated Inflation (PSI) 140 | X |
| 55 | MIL-PRF-23827B | AEROSHELL GREASE 7 6.6 lb Can | TRR | Advance multipurpose grease, it is inhibited against corrosion and has excellent resistance to water, useful operating temperature range is -73 °C to +120 °C meets MIL-PRF-23827 | X |

| | | | | | |
|---|---|---|---|---|---|
| 56 | MIL-PRF-85285E Type I- IV17925 | POLIURETANO BLANCO BRILLANTE | KIT | Coating with excellent chemical resistance, outstanding toughness, flexibility, abrasion resistance, and excellent outside durability. Conforms to MIL-PRF-85285E Type I- IV, Mix Ratio: 3 : 1 by Volume, Application Thickness: 1.8 - 2.3 mils, Theoretical Coverage: 800-900 ft2 @ 1 mil, Impact Flexibility: 40% Elongation @ RT, Low-Temp Flexibility: 1" mandrel bend @ -65°F | X |
| 57 | 75310-0530 | LIMPIAVIDRIOS X 530cc | EA | Limpiavidrios 530 Cm3, -Es un agente limpiavidrios de secado rápido-y aplicación directa.-Producto Biodegradable-que no contiene amoniaco-y no irrita ni causa daño a quien lo usa | X |
| 58 | 6895177 | ELEMENT FILTER FUEL PUMP | EA | ELEMENT FILTER FUEL PUMP | No pedido |
| 59 | 26560201 | FILTRO DE COMBUSTIBLE PRIMARIO | EA | FILTRO DE COMBUSTIBLE PRIMARIO | X |
| 60 | M27500-22TG3T14 | CABLE X 1000 FT | RO | cables designed primarily for use in aircraft and ground support equipment, their high performance and versatility makes them ideal in a wide variety of general-purpose electrical and electronic applications. White Jacket 22 AWG 3 Conductor Shielded White Jacket 22 AWG 3 Conductor Shielded | X |
| 61 | MS29561-247 | PACKING | EA | PACKING | X |
| 62 | MS25237-327 | LAMP | EA | LAMP | X |
| 63 | M-25988-1-916 | PACKING | EA | PACKING | No pedido |
| 64 | DWDCO5/16 | DRILLS 5/16 | EA | BROCA COBALTO DWDCO SERIES 5/16 | X |
| 65 | MIL-G-6032 | EZ TURN LUBRICANT FUEL LUBE TYPE 1 1LB | LB | Sealant and lubricant for oil and fuel line valves. Resistant to high temperatures, Worked Penetration 220 ASTM D-1403, Color Cream , Low Temperature Torque at 0° F - Starting Torque 55,250 g-cm ASTM D-1478 | X |
| 66 | CH-48110-1 | OIL FILTER | EA | OIL FILTER | X |
| 67 | BT-237 | FILTRO DE ACEITE | EA | FILTRO DE ACEITE | X |
| 68 | M25988/1-022 | PACKING FUEL | EA | PACKING FUEL | X |
| 69 | HL20PB86-6-8 | HI LOK PIN COLLAR PACK X 100 | EA | HI LOK PIN COLLAR PACK X 100 | No pedido |
| 70 | DWDCO1/8 | DRILLS 1/8 | EA | BROCA COBALTO DWDCO SERIES 1/8 | X |
| 71 | MS24694S53 | SCREW,MACHINE | EA | SCREW,MACHINE | X |
| 72 | Magnobond 6398-AB-1/PT | Thixotropic Paste Epoxy Adhesive - Pint Kit | PINT-KIT | Two-component thixotropic paste epoxy system designed for bonding metals and composite structures, Cure Schedule, 7 days @ 77°F or 1 hour @ 150°-250°F, Specific Gravity, Part A: 1.3,Part B: 1.0,Mix: 1.25 | No pedido |
| 73 | HCS2411-035 | FIBRA KEVLAR / 353-50 X 50 YARDAS | RO | The JPS Kevlar® Dry Fabric 353 is an aramid fiber reinforcement for use in aerospace applications where high strength, low weight, and impact resistance are essential, Style: 353, Weave: 4 Harness Satin,Dry Fabric Nominal Thickness: 9.4mil (.24mm) | No pedido |
| 74 | AMS-QQ-A-250/5 | SHEET METAL 0,020 | EA | Lamina de aluminio AMS-QQ-A-250/5 0,020 | X |
| 75 | DA2570 | FILTRO DE AIRE | EA | FILTRO DE AIRE | X |
| 76 | AS3085-014 | O-RING | EA | O-RING | X |

| | | | | | |
|---|---|---|---|---|---|
| 77 | MIL-P-87938 | MEK PEROXIDE | GL | Methyl Ethyl Ketone Peroxide, CAS Nr: 1338-23-4, Viscosity at 20°C. 16 mPa s, Density at 20°C. 1,128 g/ml | X |
| 78 | ABRASIVE 240 GRIT | Abrasive Cloth or Paper, X PLIEGO | EA | Abrasive Cloth or Paper, X PLIEGO | X |
| 79 | MIL-PRF-85285E Type I- IV | POLIURETANO COLOMBIAN POLICE BLUE METALLIC | KIT | Coating with excellent chemical resistance, outstanding toughness, flexibility, abrasion resistance, and excellent outside durability. Conforms to MIL-PRF-85285E Type I- IV, Mix Ratio: 3 : 1 by Volume, Application Thickness: 1.8 - 2.3 mils, Theoretical Coverage: 800-900 ft2 @ 1 mil, Impact Flexibility: 40% Elongation @ RT, Low-Temp Flexibility: 1" mandrel bend @ -65°F | X |
| 80 | WF336680 | FILTER ELEMENT OIL | EA | FILTER ELEMENT OIL | No pedido |
| 81 | MS29513-124 | PACKING | EA | PACKING | X |
| 82 | MIL-T-81772B TIPO I | THINNER TIPO I X 5 GL | PAIL | POLYURETHANE THINNER This product conforms to MIL-T-81772, Type I, MIN. FLASH POINT ºF (ºC) 22ºF (-5ºC) is intended for use with:MIL-PRF-83231, 83286, 85285, 85322 (2 Part Aliphatic Polyurethane Coatings).MIL-DTL-46168 (2 Part CARC Polyurethane Coating) | |
| 83 | 4415122 | FILTRO SEPARADOR DE AGUA | EA | FILTRO SEPARADOR DE AGUA | X |
| 84 | TOLUENO | TOLUENO X 5 GL | PAIL | Nombre Comercial Tolueno, Fórmula Química C7H8, CAS 188-88-3, DENSIDAD 0.87 g/cc, PUNTO DE INFLAMACION 4° –9°C , INDICE DE REFRACCION. 1.4967. | X |
| 85 | DEWEZS1-9 | SCREW EXTRACTORS X SET | EA | SCREW EXTRACTORS SET SIZE-RANGE 1-9 DEWEZS1-9 | |
| 86 | MIL-G-81322 | GREASE,AIRCRAFT Mobil grease 28, 13.4 oz tube | EA | General purpose aircraft Grease Supreme performance, high temperature, antiwear grease meets the quality level of U.S. Military Specification MIL-G-81322E, NLGI Grade 1.5 | |
| 87 | DWDCO5/32 | DRILLS 5/32 | EA | BROCA COBALTO DWDCO SERIES 5/32 | X |
| 88 | 6000-2 | TEMP-PLATE | EA | TEMP-PLATE | X |
| 89 | MS24665-377 | PIN COTTER | EA | PIN COTTER | X |
| 90 | 24M-XHD 800CCA-1000MCA | BATERIA | EA | Bateria 24M-XHD Amperios de arranque en frío (CCA) 800, Amperios de arranque (CA)1000, Reserva de Capacidad (RC) 135 minutos | |
| 91 | JNT-K8S | SCRAPER PLASTIC | EA | SCRAPER PLASTIC | X |
| 92 | HCS2410-020 | FIBERGLASS, DRY FABRIC, VOLAN 1 ROLL= 38" WIDE X 125 YDS | RO | Hexcel's HexForce® Fiberglass Dry Fabric 1581, Fire resistance, Thermal and electrical insulating properties, Fabric Thickness: 8.5mil (.22mm), Weave Style: 8 Harness Satin, Weave Style 8 Harness Satin, Breaking Strength Warp 450 lbf/in, Filling 380 lbf/in | No pedido |
| 93 | PR1428-B 1/2 | ADHESIVE SEALANT | PINT-KIT | PR-1428 CLASS B is a two-part manganese dioxide cured, polysulfide compound. It has a service temperature range from -65°F (-54°C) to 250°F (121°C) Tested in accordance with MIL-S-8784 CLASS B | X |
| 94 | AMS-QQ-A-250-2024-T3-0.040 | SHEET METAL | EA | Lamina de aluminio 2024-T3 de 0.040 de 48" X 144" - (4 X 12 ft.) | X |

| | | | | | |
|---|---|---|---|---|---|
| 95 | 5423 | CINTA ANTIFRICCION MODEL S-18660 | RO | 3M 5423 UHMW Film Tape - 2" x 18 yds Reduces friction, noise and vibration on material handling equipment. Handles temperatures from –30°F to 225°F. | No pedido |
| 96 | VAC1-5SET | STEP DRILLS X SET | EA | STEP DRILL VAC SERIES 5 Piece Set #1, 2, 3, 4, 5 VAC1-5SET | |
| 97 | 281881-001 | BATERIAS 12 V. DELCO | EA | 281881-001 DEKA BATTERY 12 VOLT-HOBART GROUND SYSTEM | X |
| 98 | 2599 | LIJA Stikit De 3m 2599 P80 | RO | LIJA Stikit De 3m 2599 P80 | X |
| 99 | TELA DE GARZA | TELA DE GARZA X 100 MT | RO | TELA DE GARZA X 100 MT | |
| 100 | HCS2108-NP | FILM, RELEASE NON-PERFORATED 1 ROLL = 48" WIDTH X 200 YDS | RO | HCS2108-NP is an FEP resin base release film exhibits high elongation and excellent release characteristics, maximum use temperature 500 °F (260°C) Elongation MD: 160 %, TD: 200 % | No pedido |
| 101 | TAPE MASKING 2 in | CINTA ENMASCARAR 233+ DE 48MM X 55MT = 2" | RO | CINTA ENMASCARAR 233+ DE 48MM X 55MT = 2" | X |
| 102 | MS24665-306 | PIN COTTER | EA | PIN COTTER | |
| 103 | MIL-PRF-85285E Type I- IV 36231 | POLIURETANO GRIS MATE | KIT | Coating with excellent chemical resistance, outstanding toughness, flexibility, abrasion resistance, and excellent outside durability. Conforms to MIL-PRF-85285E Type I- IV, Mix Ratio: 3 : 1 by Volume, Application Thickness: 1.8 - 2.3 mils, Theoretical Coverage: 800-900 ft2 @ 1 mil, Impact Flexibility: 40% Elongation @ RT, Low-Temp Flexibility: 1" mandrel bend @ -65°F | X |
| 104 | 842921 | OIL FILTER | EA | OIL FILTER | X |
| 105 | CEPILLO CERDA METALICA | CEPILLO DE CERDA DE BRONCE | EA | CEPILLO DE CERDA DE BRONCE | X |
| 106 | TSD27ST | BROCA No 27 TALADRO DE 90 | EA | BROCA No 27 TALADRO DE 90 | |
| 107 | AN525-10R6 | SCREW,MACHINE | EA | SCREW,MACHINE | X |
| 108 | TAPE MASKING 3/4 in | CINTA ENMASCARAR 233+ DE 18MM X 55MT= 3/4" | RO | CINTA ENMASCARAR 233+ DE 18MM X 55MT= 3/4" | X |
| 109 | RG-400 | RG-400 High- Coaxial Cable DXE-RG400-CTL X 500 FT | RO | Cable coaxial de RF flexible estándar RG-400 DXE-RG400-CTL X 500 FT | No pedido |
| 110 | 394018 IAW 394018S | AIR FILTER | EA | AIR FILTER | X |
| 111 | DWDCO27 | DRILLS No 27 | EA | BROCA COBALTO DWDCO SERIES No 27 | |
| 112 | TSD5/32ST | BROCA No 5/32 TALADRO DE 90 | EA | THREADED SHANK DRILLS Stubby Series SIZE 5/32 | X |
| 113 | PINCEL N:o 8 PLANO | PINCEL N:o 8 PLANO | EA | PINCEL N:o 8 PLANO | |
| 114 | 14310 | DEVCON® 14310 2-TON - 25 ML TUBE | TB | Extremely strong, medium-cure, water-resistant clear adhesive that will self-level after application, Color (Mixed) Clear,Service Temperature Dry, -40°F to 200°F, Impact Resistance 6.5 ft.-lb./in.(2), 14310 25 ml Dev-Tube | X |
| 115 | TAPE MASKING 1/4 in | CINTA ENMASCARAR 233+ DE 6MM X 55MT= 1/4" | RO | CINTA ENMASCARAR 233+ DE 6MM X 55MT= 1/4" | X |
| 116 | TSD40ST | BROCA No 40 TALADRO DE 90 | EA | THREADED SHANK DRILLS Stubby Series SIZE 40 | |
| 117 | 691035 | FUEL FILTER | EA | FUEL FILTER | X |
| 118 | 051131-07515 | SCOTCH-BRITE ROLOC BLUE 2" | EA | Scotch-Brite Roloc Blue 2" | X |
| 119 | DWDCO7/32 | DRILLS 7/32 | EA | BROCA COBALTO DWDCO SERIES 7/32 | No pedido |
| 120 | HCS2108-P5 | FILM, RELEASE PERFORATED, 48" X 200 YD | RO | HCS2108-P5 FILM, RELEASE PERFORATED, 48" X 200 YD | |
| 121 | MS9388-009 | PACKING | EA | PACKING | X |
| 122 | SKF 17699 | RADIAL SHAFT SEAL | EA | RADIAL SHAFT SEAL | |

| | | | | | |
|---|---|---|---|---|---|
| 123 | CEE BEE R-256 | REMOVEDOR DE PINTURA X 5 GL | PAIL | High-performing paint stripper for removing urethanes, epoxies, primers and enamels Conforms To MIL-R-81294 | X |
| 124 | MIL-T81772B TIPO II | THINNER TIPO II X 5 GL | PAIL | EPOXY THINNER This product conforms to MIL-T-81772, Type II, MIN. FLASH POINT °F (°C) 32°F (0°C) Epoxy Thinner is intended for use with:MIL-DTL-24441 Paint & Primer all Types.MIL-PRF-22750 Epoxy Polyamide Coatings,MIL-PRF-23236 Epoxy Primers & Coatings,MIL-PRF-23377 Epoxy Polyamide Primer Coatings,MIL-DTL-53022 Epoxy Primer,MIL-PRF-4556 Epoxy Primer & Topcoat | |
| 125 | WK1030 | MAIN FILTER | EA | MAIN FILTER | X |
| 126 | M27500-22TG2T14 | CABLE X 1000 FT | RO | White Jacket 22 AWG 2 Conductor Shielded Cable, MaterialTin Plated Copper/ETFE | X |
| 127 | CPC | CPC GRADO 2 | GL | Class II Solvent cutback corrosion preventive compound, FLASH PMCC Minimum 106°F, Specific Gravity @60°F (15.6 °C) 0.88, CURE TIME 24 HOURS | X |
| 128 | BROCHA 1" | BROCHA PELO DE MARTA | EA | BROCHA PELO DE MARTA | X |
| 129 | LIMPIADOR DE TAPICERIA | LIMPIADOR DE TAPICERIA ESPUMA 400ml | EA | LIMPIADOR DE TAPICERIA ESPUMA 400ml | X |
| 130 | TSDDST | BROCA LETRA D TALADRO DE 90 | EA | THREADED SHANK DRILLS Stubby Series SIZE D | X |
| 131 | 305447-3079-G1 | 16 HP VANGUARD ENGINE | EA | 479cc Vanguard Series Engine With 1 In. Tapped 3/8 - 24 Keyway Crankshaft (CARB) | No pedido |
| 132 | HYSOL EA9320NA | AERO EPOXY ADHESIVE 1 QT KIT | QT / KIT | LOCTITE EA 9320NA AERO is a two-component paste adhesive with good peel strength as well as elevatedtemperature resistance. The temperature of the separate components prior to mixing is notcritical, but should be close to room temperature (77°F/25°C) | No pedido |
| 133 | AN960JD10L | WASHER | EA | WASHER | X |
| 134 | M25988-1-152 | PACKING | EA | PACKING | No pedido |
| 135 | S-12490 | GUANTES DE NITRILO | BOX | GUANTES DE NITRILO | X |
| 136 | HUT12260 | DRILL GAUGES | EA | DRILL GAUGES Wire Gauge Sizes #1 to 60 HUT12260 | No pedido |
| 137 | RTV106 | MOMENTIVE SEALANT RED, 10.1 OZ CARTRIDGE | TB | RTV106 sealant is paste-consistency sealant,standard strength hightemperature sealant.Application Rate,(g/min) 400,Tack-Free Time, min. 20 | |
| 138 | B3.1 | BATERIAS FS-16NP 350 AMP | EA | BATERIA DE 350 AMP F5-16NP | X |
| 139 | 214-040-812-003 | SEAL, GREASE | EA | SEAL, GREASE | No pedido |
| 140 | DWDN9/16 | DRILLS 9/16 | EA | BROCA H.S.S DWDN SERIES 9/16 | |
| 141 | 151394 | VELCRO BLACK LOOP 50 MM X 25M | RO | VELCRO BLACK LOOP 50 MM X 25M | X |
| 142 | AS3209-162 | PACKING PREFORMED | EA | PACKING PREFORMED | |
| 143 | DWDCO25/64 | DRILLS 25/64 | EA | BROCA COBALTO DWDCO SERIES 25/64 | |
| 144 | SIMONIZ | LIMPIADOR DE TAPIZADO ESPUMA x 400ml | EA | LIMPIADOR DE TAPIZADO ESPUMA x 400ml | X |
| 145 | DWDCO3/16 | DRILLS 3/16 | EA | BROCA COBALTO DWDCO SERIES 3/16 | X |
| 146 | CRC 5-56 | LUBRICANTE 5-56 PENETRANTE 400CC | EA | Producto multiuso de mantenimiento en spray. Acaba con el óxido y la corrosión, desplaza el agua y elimina el óxido y la | |

| | | | | | |
|---|---|---|---|---|---|
| | | | | suciedad. 400 ml, Peso específico (@ 20ºC): 0.82, Punto de inflamación (vaso cerrado) : 78ºC, Viscosidad (@ 40 ºC) : 26 mPa.s | |
| 147 | AN381-2-16 | PIN COTTER 1/16 | EA | PIN COTTER 1/16 | X |
| 148 | MIL-PRF-85285E Type I- IV 16251 | POLIURETANO GRIS BRILLANTE | KIT | Coating with excellent chemical resistance, outstanding toughness, flexibility, abrasion resistance, and excellent outside durability. Conforms to MIL-PRF-85285E Type I- IV, Mix Ratio: 3 : 1 by Volume, Application Thickness: 1.8 - 2.3 mils, Theoretical Coverage: 800-900 ft2 @ 1 mil, Impact Flexibility: 40% Elongation @ RT, Low-Temp Flexibility: 1" mandrel bend @ -65°F | X |
| 149 | AS5685, 0,041 | LOCK WIRE | LB | Steel, Corrosion Resistant, Safety Wire AS5685, 0,041" Diameter | No pedido |
| 150 | 9.00X6 | TIRE | EA | TIRE 9.00-6 PLY RATING 10,Rated Speed (MPH) 120, Maximum Braking Load (Lbs) 6530, Rated Inflation (PSI) 58 | X |
| 151 | WYPALL X 80 REGULAR | WYPALL X-80 REGULAR | RO | WYPALL X-80 REGULAR | X |
| 152 | 400642-003 | VOLTIMETRO 28V DC | EA | VOLTIMETER DC 400642-003 HOBART | X |
| 153 | EC-776 | 3M™ SCOTCH-WELD™ FUEL RESISTANT COATING EC-776 QUART | QT | General purpose, solventbased adhesive/coatings with good adhesion to synthetic rubber, metal, glass,and many plastics, Flash Point (Closed Cup)55°F (13°C) Viscosity 1500 ± 500 cps, Color Transparent Amber | No pedido |
| 154 | VAC5 | STEP DRILLS | EA | STEP DRILLS 12 STEPS, RANGE 1 /4"–1-3/8"x8ths VAC5 | X |
| 155 | BROCHA 1" IN | BROCHA 1" IN | EA | BROCHA 1" IN | X |
| 156 | PR1440-A 1/2 | ADHESIVE SEALANT | PINT-KIT | PR-1440 CLASS A is an aircraft integral fuel tank sealant, Cured specific gravity 1.57 / Non volatile content % 86, Tested in accordance with AMS-S-8802 | X |
| 157 | 04016 | LPS 04016 NOFLASH ELECTRO CONTACT CLEANER 12OZ, CLEAR | EA | LPS 04016 (07416) non-flammable electro contact cleaner is ideal for removing dirt, moisture, dust, flux and oxides. Boiling Point / Range 118°F (47.78°C), VOC Content 59.5% Water Solubility <0.14 g/L @ 68°F | |
| 158 | DWDN37/64 | DRILLS 37/64 | EA | BROCA H.S.S DWDN SERIES 37/64 | |
| 159 | HCS 2125 | SEALANT TAPE Black Roll – HCS2125 | RO | HCS 2125 is a high temperature sealant tape for autoclave applications up to 450 °F (232 °C), solids 100%, non flammable, standar size 0.125"x.0.5" x32ft | No pedido |
| 160 | DWDCO13/64 | DRILLS 13/64 | EA | BROCA COBALTO DWDCO SERIES 13/64 | |
| 161 | MS24617-33 | SCREW | EA | SCREW | X |
| 162 | Honey Bee 60T | SERVICE,WASTE DISPOSAL | EA | Acidic liquid cleaner developed for removal of hard water scale and accumulated waste materials from vacuum and re-circulating toilet systems in aircraft.Blue liquid, Surfactants biodegradable | X |
| 163 | 400641-012 | AMPERIMETRO | EA | Ammeter, DC, 0-2000 Amps, 50 mVDC | X |
| 164 | AS3085-126 | PACKING PREFORMED | EA | PACKING PREFORMED | X |
| 165 | AMS-QQ-A-250-2024-T3-0.050 | SHEET METAL | EA | Lamina de aluminio 2024-T3 de 0.050 de 48" X 144" - (4 X 12 ft.) | X |
| 166 | A-A-2714 | BAGS PLOTH | EA | BAGS PLOTH A-A-2714 | No pedido |

| | | | | | |
|---|---|---|---|---|---|
| 167 | PERMALON 327 | LUBRICANT, DRY FILM 14 OZ CAN AEROSOL | EA | Lubricant, Dry Film 14 OZ CAN Aerosol PERMALON 327 | No pedido |
| 168 | AN960-416 | WASHER | EA | WASHER | X |
| 169 | MS287784 | O-RING | EA | O-RING | No pedido |
| 170 | ST3002-05 | PACKING | EA | PACKING | |
| 171 | PR1428-A 1/2 | ADHESIVE SEALANT | PINT-KIT | PR-1428 CLASS A is a low adhesion sealant Cured specific gravity 1.49 / Non volatile content % 92 Tested in accordance with MIL-S-8784 CLASS A | X |
| 172 | AD9318-FD | EPOXY PRIMER MIL-PRF-23377K TY 1 CL C2 | KIT | Fast Dry, Two Component Aeroprime Primer per MIL-PRF-23377K, Type I, Class C2, AD9318-FD Aeroprime Primer - Component A: Weight per Gallon: 12.1 lbs. +/- 0.2,Curing Agent - Component B, Weight per Gallon: 7.1 lbs. +/-0.2, Catalyzation Ratio: 3:1 by volume, Viscosity: 21 - 25" #2 Zahn | X |
| 173 | 3029566 | GASKET, FUEL NOZZLE | EA | GASKET, FUEL NOZZLE | No pedido |
| 174 | 53039WPX | PRIMER PARA COMPUESTOS | KIT | High Build, Fast Drying, Urethane Primer Surfacer, used to eliminate mild imperfections in composite substrates, It meets and exceeds the performance requirements of MEP 10-070, Catalyzation Ratio: 3:1 by volume , Weight Solids:69.1% ± 1.0, Viscosity: 28 ± 5" #4 Ford Cup | X |
| 175 | 6873905 | RING,RETAINING | EA | RING,RETAINING | No pedido |
| 176 | 403809-002 | SWITCH PRESION DE ACEITE | EA | SWITCH PRESION DE ACEITE | No pedido |
| 177 | PLIOBOND 20 | SOLVENT BASED ADHESIVE PLIOBOND | PT | Pliobond 20 Is a general thermosetting adhesive that can be used to bond virtually all porous and nonporous substrates, Base synthetic Rubber, specific gravity 0.868, flash poitn 20°F, application temperature 40-100°F | No pedido |
| 178 | PGC13 | PRIST ACRYLIC PLASTIC GLASS CLEANER 13 oz Aerosol Can | EA | Acrylic, plastic and glass cleaner. TESTED AGAINST FEDERAL TEST STANDARD METHOD NO. 406 AND MIL-P-008184D,works inside and outside the aircraft, and on metal and vinyl, without harming painted surfaces. 13 oz Aerosol Can | X |
| 179 | RTV 732 | DOWSIL 732 - 90 ML (3 OZ) TUBE | TB | General purpose silicone adhesive/sealant Stable and flexible from -60°C to +180°C (-76°F to +356°F), with short peaks up to +205°C (401°F) Complies with MIL-A-46106, Specific gravity 1.04 | X |
| 180 | S-10169 | 3M 3743 CARTON SEALING TAPE - CLEAR, 3" X 55 YDS MODEL NO.S-10169 | RO | 3m 3743 Cinta Transparente Para Cajas - Largo x Ancho 50 m x 76 mm -X ROLLO | No pedido |
| 181 | AXAREL 1000 | CLEANING SOLVENT X 5 GL | PAIL | Approved MIL-PRF-680 Type I cleaner suitable for the replacement of isopropyl alcohol (IPA), acetone, methyl ethyl ketone (MEK), Low Toxicity, Non-Corrosive, Flash Point 127 °F (53 °C), Viscosity (25 °C) 1.36 cps | |
| 182 | DWDCO10 | DRILLS No 10 | EA | BROCA COBALTO DWDCO SERIES No 10 | X |
| 183 | ACF-50 | ACF-50 LUBRICANT 10013 PURPLE, 13 OZ AEROSOL CAN | EA | Anti-corrosion/lubricant compound, that has been specifically designed for the Aerospace Industry, qualified to Mil-C-81309E, Type II class I. | X |
| 184 | DWDA/CX61/16 | DRILLS 6¨ 1/16 | EA | BROCA HSS DWDA/C SERIES 6" 1/16 | |

| | | | | | |
|---|---|---|---|---|---|
| 185 | BINNER | LIMPIADOR DE PANTALLAS LCD x 50 ml | EA | LIMPIADOR DE PANTALLAS LCD x 50 ml | |
| 186 | A-701 | PRIMER Zinc Phosphate Yellow (12 oz.) | EA | A self-etching primer that is chromate-free and chemically bonds with aluminum and steel to form a corrosion resistant base coat. Tack free – 10 minutes, Fully dry – 48 hours, Meets performance standards outlined in Federal Specification TTP1757B. | No pedido |
| 187 | MS3367-2-9 | STRAP TIEDOWN, PACK X 100 PCS | EA | STRAP TIEDOWN, PACK X 100 PCS | No pedido |
| 188 | MS25488 | PLUG CONTACTOR SALIDA | EA | PLUG CONTACTOR SALIDA | X |
| 189 | DWDCO15/64 | DRILLS 15/64 | EA | BROCA COBALTO DWDCO SERIES 15/64 | |
| 190 | TSD20ST | BROCA No 20 TALADRO DE 90 | EA | THREADED SHANK DRILLS Stubby Series SIZE 20 | |
| 191 | MOBIL OIL JET 254 | LUBRICATING OIL,AIR | QT | Extra high performance, synthetic aircraft-type gas turbine lubricant engineered to meet the performance requirements for gas turbine engines used in commercial and military aircraft The effective operating range of the lubricant is between -40°C (-40 °F) and 232°C (450°F). Specific Gravity 1.0044 | No pedido |
| 192 | PR-1440B-1/2. | ADHESIVE SEALANT | QT / KIT | PR-1440 Class B is an aircraft integral fuel tank sealant. It has a service temperature range from -65°F (-54°C) to 250°F (121°C) Tack free time (hours)<4, Cure time to 35 A Durometer (hours) 12 | X |
| 193 | MIL-H-5606 | HIDRAULICO 756 | QT | Red-dyed, mineral oil based hydraulic fluid developed for the severe duty demands of aerospace and industrial service, Wide operating temperature range, Low temperature fluidity meets MIL-SPEC: MIL-PRF-5606H, Flash Point, COC, °F 231, API Gravity 30.8 | X |
| 194 | M81969/1-03 | REMOVAL AND INSERT PLASTICO VERDE | EA | REMOVAL AND INSERT PLASTICO VERDE | X |
| 195 | MS20995C25 | LOCK WIRE | LB | MS20995C25 Stainless Steel 0.025" Diameter Safety Wire - 1 lb Roll | X |
| 196 | 22 X 6,75-10 | TIRE | EA | TIRE 22X6.75-10 PLY RATING 10,Rated Speed (MPH) 190, Maximum Braking Load (Lbs) 8550, Rated Inflation (PSI) 125 | X |
| 197 | A-A-59303, Type T1 | TALCUM POWDER, TECHNICAL GRADE, | LB | Powder 20.0 by weight magnesium oxide and 40.0 by weight magnesium oxide and 35.0 by weight silicon dioxide and 65.0 by weight silicon dioxide | No pedido |
| 198 | AN6235-3A | GREEN FILTER ELEMENT | EA | GREEN FILTER ELEMENT | X |
| 199 | 287562 | SOLENOIDE ACELERACION JET X 4D | EA | SOLENOIDE ACELERACION JET X 4D | |
| 200 | 6870032 | FILTER ELEMENT LUBR | EA | FILTER ELEMENT | No pedido |
| 201 | D-321 R | MOLYKOTE Anti-Friction Coating Spray, 312 gm | EA | For metal/metal combinations with slow to medium fast movements and high loads. Suitable for the permanent lubrication of highly stressed sliding guides with low sliding speeds, Viscosity at 23°C (#3 cup) seconds 23, Density at 20°C g/ml 1.07 Service temperature range °C -180 to 450 | X |
| 202 | 19.5 X 6.75-8 / -10 | TIRE | EA | TIRE 19.5x6.75-8 PLY RATING 10,Rated Speed (MPH) 225, Maximum | X |

| | | | | | |
|---|---|---|---|---|---|
| | | | | Braking Load (Lbs) 6400, Rated Inflation (PSI) 110 | |
| 203 | DGF-123 | GRAPHITE, 9 OZ AEROSOL | EA | Dry Graphite Film Spray is for pre-assembly and assembly lubrication, heat tolerant to 3000 °F, Dry in 2-3 min, excellent conductor for electrical applications. | X |
| 204 | 206-010-147-001 | PLUG,PROTECTIVE | EA | PLUG,PROTECTIVE | No pedido |
| 205 | TSDFST | BROCA LETRA F TALADRO DE 90 | EA | THREADED SHANK DRILLS Stubby Series SIZE F | |
| 206 | HYSOL 934 | Aero Epoxy Paste Adhesive, Quart Kit | QT / KIT | LOCTITE EA 934NA AERO is a two-component thixotropic paste adhesive, which cures at room temperature and possesses superior strength to 300°F/149°C and higher, MMM-A-132 Qualified,The temperature of the separate components prior to mixing is not critical, but should be close to room temperature (77°F/25°C) | X |
| 207 | MIL-W-18723 | AIRCRAFT SOLVENT TYPE WAX | GL | Wax that cleans and polishes aircraft fuselages ref mil-w-18723 | No pedido |
| 208 | DWDCO5 | DRILLS No 5 | EA | BROCA COBALTO DWDCO SERIES No 5 | |
| 209 | SHC 626 | OIL TRANSMISION X 5 GL | PAIL | Aceite de excelente rendimiento para cojinetes y engranajes, diseñados para proporcionar un servicio destacado en terminos de protección de euipos, vida del aceite y operación sin problemas, alto indice de viscosidad y ausencia de ceras, Grado de viscosidad ISO 68, punto de congelamiento -48°C, punto de inflamación 236°C | No pedido |
| 210 | 03116 | CFC FREE ELECTRO CONTACT CLEANER | EA | Electro contact cleaner ASTM F-519, Type 1C, Boiling Point / Range 140.9°F (60.5°C), Flash Point Aerosol: < 1.4°F (< -17.0°C) TCC, Safe on Plastics, Fast Evaporating; Leaves No Residue. | X |
| 211 | 00216 | LUBRICANTE LPS N°2 | EA | Es un lubricante y protector de acción rápida y penetración profunda, proporciona un recubrimiento aceitoso ligero, Resistencia dieléctrica: 33 Kv.Punto de inflamación 175°F (79°C) TCC-dispensed liquid, Gravedad específica 0.82 – 0.86 @ 20°C, Rango de temperatura, 32°F (0°C ) to 325°F (163°C) | X |
| 212 | 80183 | PLASTIC CLEANER , 16 OZ | TB | Plastic Cleaner removes grease, stains and dirt, cleaning most plastics without scratching, Physical Form Liquid, Primary Container Type Can, NSN 7930014429667 | X |
| 213 | 402788 | BRUSH | EA | BRUSH | |
| 214 | DWD29J-DB-SET | QUALTECH DRILL BLANKS X SET | EA | DRILL SET Qualtech Drill Blanks DWD29J-DB-SET | |
| 215 | 204-040-760-109 | FILTER ELEMENT FLUID | EA | FILTER ELEMENT FLUID | |
| 216 | BROCHA 2" IN | BROCHA 2" IN | EA | BROCHA 2" IN | X |
| 217 | MIL-PRF-85285E Type I- IV 17886 | POLIURETANO BEIGE BRILLANTE | KIT | Coating with excellent chemical resistance, outstanding toughness, flexibility, abrasion resistance, and excellent outside durability. Conforms to MIL-PRF-85285E Type I- IV, Mix Ratio: 3 : 1 by Volume, Application Thickness: 1.8 - 2.3 mils, Theoretical Coverage: | X |

| | | | | | |
|---|---|---|---|---|---|
| | | | | 800-900 ft2 @ 1 mil, Impact Flexibility: 40% Elongation @ RT, Low-Temp Flexibility: 1" mandrel bend @ -65°F | |
| 218 | AMS-QQ-A-250-2024-T3-0.020 | SHEET METAL | EA | Lamina de aluminio 2024-T3 de 0.020 de 48" X 144" - (4 X 12 ft.) | X |
| 219 | PR-1428, CLASS B-2 | ADHESIVE SEALANT | QT / KIT | PR-1428 CLASS B is a two-part manganese dioxide cured, polysulfide compound. It has a service temperature range from -65°F (-54°C) to 250°F (121°C) Tested in accordance with MIL-S-8784 CLASS B Cured specific gravity 1.50 / Non volatile content % 97 | X |
| 220 | INS27021 | INSERT BITS | EA | INSERT BITS W/ 1/4" SHANK PHILLIPS SIZE P2 | |
| 221 | RTV 736 | Dow Corning Xiameter RTV736 90 mL tube | TB | Dow Corning® 736 Nonslumping sealant designed for sealing and bonding applications exposed to temperatures as high as 315°C (600°F) for Aerospace gasketing,Sealing and encapsulating heating elements in appliances, Tack-Free Time<br>minutes 17, Cure Time (3-mm [l/8-inch] thickness) 24 hours | |
| 222 | AN525-832R7 | SCREW | EA | SCREW | X |
| 223 | BRIZZE 300ML | AMBIENTADOR AEROSOL 300 ML | EA | Solución efectiva que elimina los malos olores dejando una sensación de limpieza y frescura en el ambiente. Elimina el 99% de las bacterias, Rango de temperatura<br>optimo 15-35°C, incoloro, Densidad 0,95 ± 0,05 gr/ ml. | X |
| 224 | DWDCOD | DRILLS LETRA D | EA | BROCA COBALTO DWDCO SERIES SIZE D | |
| 225 | MIL-L-22851D | ACEITE AEROSHELL W100 | QT | AeroShell Oil W100 is an ashless dispersant oil, promotes engine cleanliness, help reduce oil comsumption AeroShell W100 provides compatibility with other approved aircraft piston engine oils, AeroShell Oil W100 is produced to meet fully the SAE specification J-1899 (Grades SAE 30, 40, 50 and 60 respectively) SAE viscosity grade 50. | X |
| 226 | CR3243-4-4 | RIVET,BLIND | EA | RIVET,BLIND | No pedido |
| 227 | 288380-001 | RESISTOR 10 OHM 100 WATT (V44655) | EA | 100W Fixed Resistor | |
| 228 | 204-040-760109 | FILTER ASSY | EA | FILTER ASSY | No pedido |
| 229 | ST3001-214 | PACKING | EA | PACKING | |
| 230 | MIL-PRF-85285E Type I- IV | CLEAR URETHANE | KIT | Coating with excellent chemical resistance, outstanding toughness, flexibility, abrasion resistance, and excellent outside durability. Conforms to MIL-PRF-85285E Type I- IV, Mix Ratio: 3 : 1 by Volume, Application Thickness: 1.8 - 2.3 mils, Theoretical Coverage: 800-900 ft2 @ 1 mil, Impact Flexibility: 40% Elongation @ RT, Low-Temp Flexibility: 1" mandrel bend @ -65°F | X |
| 231 | DWDCO1/4 | DRILLS 1/4 | EA | BROCA COBALTO DWDCO SERIES 1/4 | |

| | | | | | |
|---|---|---|---|---|---|
| 232 | 4001 | DOUBLE/BUBBLE® 04001 Red Epoxy Adhesive Sachet - 100/Box | EA | Extra fast setting, two–component, room temperature curing epoxy adhesive. The system will cure at as low as –18 °C (0 °F). Viscosity @ 25 °C,cps, part A:55,000, Flash Point, PMCC, °C Part A: 157 | X |
| 233 | 204-040-760-105 | FILTER ASSY | EA | FILTER ASSY | No pedido |
| 234 | CEE BEE A-882 | SHAMPOO AERONAUTICO X 55 GL | DRUM | Water-dilutable general-purpose cleaner for aircraft exterior surfaces, Conforms To MIL-PRF-87937D Clear, water-dilutable solution | |
| 235 | M83461/1-212 | PACKING | EA | PACKING | X |
| 236 | WF336-680 | FILTER ASSY | EA | FILTER ASSY | No pedido |
| 237 | DWDA/CX63/32 | DRILLS 6¨ 3/32 | EA | BROCA HSS DWDA/C SERIES 6" 3/32 | |
| 238 | SAE J-1899 | Aeroshell Synthetic Engine Oil-W15W50 | QT | AeroShell Oil W 15 W 50 is a premium semi-synthetic multigrade ashless dispersant oil specifically developed for aviation piston engines. MIL-L-6082E replaced by These new SAE Standard J-1899 Lubricating Oil, Aircraft Piston Engine (Ashless Dispersant),SAE viscosity grade: Multigrade, flash point 220 min, total acidity mgKOH/g 1,0 max | X |
| 239 | 15W40 4T | ACEITE MOTOR | GL | 15W40 4T Lubricante de motor 4 tiempos de alta calidad,Excelentes propiedades anti-desgaste que protegen los componentes del motor y el embrague, conllevando a reducir de los costos de mantenimiento,Viscosidad @ 100 ºC, cSt 14.2, Índice de Viscosidad 137, Punto de inflamación, ºC 232 | X |
| 240 | DWD15J-LH-SET | QUALTECH HSS LEFT HAND JOBBERS | EA | DRILL SET Qualtech HSS Left Hand Jobber | |
| 241 | TAPE MASKING 1 1/2 in | CINTA ENMASCARAR 233+ DE 36MM X 55MT = 1 1/2 PULGADA | RO | CINTA ENMASCARAR 233+ DE 36MM X 55MT = 1 1/2 PULGADA | X |
| 242 | TSD3/16ST | BROCA No 3/16 TALADRO DE 90 | EA | THREADED SHANK DRILLS Stubby Series SIZE 3/16 | |
| 243 | PR-1440B-2 | ADHESIVE SEALANT | QT / KIT | PR-1440 Class B is an aircraft integral fuel tank sealant. It has a service temperature range from -65°F (-54°C) to 250°F (121°C) Tack free time (hours)<8, Cure time to 35 A Durometer (hours) 16 | X |
| 244 | DWDCO17/64 | DRILLS 17/64 | EA | BROCA COBALTO DWDCO SERIES 17/64 | |
| 245 | MIL-G-3545C | GRASA AEROSELL 5(6,6 LB) | EA | High temperature grease composed of a mineral oil thickened with Microgel, Meets MIL -G- 3545C, The useful operating temperature range is -23°C to +177 °C. | No pedido |
| 246 | DWDCO1/2 | DRILLS 1/2 | EA | BROCA COBALTO DWDCO SERIES 1/2 | |
| 247 | MIL-PRF-12070 | FOG OIL CALSOL 810/MIL PRF-12070E | EA | HIGH VISCOSITY-GRAVITY CONSTANT (VGC) PROCESS OIL, Viscosity @ 40 °C (cSt) 20.6, API Gravity @ 60 °F 24.1, Specific Gravity @ 60 °F 0.9091, Viscosity-Gravity Constant 0.871, Molecular Weight 305, Pour Point (°F) -58, Maximum Oil Loading (PHR) for Various Neoprenes: (GNA 20) (WHV 22) | |
| 248 | SP-1/4FR100 | SPIROBAND | MT | Spiral band spiral cable wrap SP-1/4FR100 | |

| | | | | | |
|---|---|---|---|---|---|
| 249 | TSDGST | BROCA LETRA G TALADRO DE 90 | EA | THREADED SHANK DRILLS Stubby Series SIZE G | |
| 250 | A-A-59298 | Tape, Adhesive, Pressure Sensitive | RO | Tape, Adhesive, Pressure Sensitive A-A-59298 | No pedido |
| 251 | ADHESIVE HYSOL EA960 | Hysol EA 960F Epoxy Adhesive Kit | QT / KIT | LOCTITE EA 960F AERO (fast) is a fairing and smoothing compound for exterior aircraft surfaces. It is a twocomponent system, which cures rapidly at room temperature.Viscosity, @ 77°F PART A 6500 Poise PART B 600 Poise, Pot Life (100 gram mass) 30 minutes @ 77°F/25°C Method - ASTM D 2471 | No pedido |
| 252 | 48"X96"X5mm. | PLEXI GLASS 48" x 96" SHEET | EA | Clear Acrylic Sheets offer excellent clarity, impact strength and economical performance in a lightweight plastic material. Plexiglass sheet is a common reference term for acrylic sheets, PLEXI GLASS 48" x 96" SHEET | No pedido |
| 253 | SAE20W50 | ACEITE MOTOR | GL | Aceite mineral, Proporciona una muy buena protección al motor y ayuda a fomentar la larga vida útil del mismo, Grado SAE20W50, Índice de viscosidad, ASTM D 2270 (141), Punto de fluidez, °C, ASTM D 97 (-30), Punto de inflamación, °C, ASTM D 92 (230) | X |
| 254 | 038088-08 | FILTER | EA | FILTER | |
| 255 | BROCHA 2" | BROCHA PELO DE MARTA | EA | BROCHA PELO DE MARTA | X |
| 256 | SP-1-FR | SPIROBAND | MT | Spiral band spiral cable wrap SP-1 -FR | |
| 257 | MIL-PRF-16173 GR1 / GL | CPC ANTICORROSIVO GRADO 1 | GL | Solvent cutback, firm film, black asphaltic corrosion preventive compound, approved under Military Specifications MIL-PRF-16173E, Grade 1, for Class I, / Flash, PMCC*, Minimum 105°F, / Specific Gravity @ 60 F (15.6 C) 0.88 / Approximate Dry to Touch Time @ 77 F (25 C) 2 hours | |
| 258 | RTV133 | RTV133 Black Silicone Electrical Sealant - 10.1 oz Cartridge | TB | RTV133 black, one-component, ready-to-use Operating temperature range of -60~205°C (-70~400°F), Application Rate, gm/min. 650, Tensile Strength, kg/cm2(lb/in2) 46 (650) | X |
| 259 | 3950 | EDGE SEALER 8 OZ CAN | EA | Designed for edge sealing of film edges in heavily used areas, clear liquid, material Acrylic/Vinyl solution in Xylene, clear, Minimum viscosity : 300 Centipoise, Service temperature -51°C to +65°C | |
| 260 | DWDCO27/64 | DRILLS 27/64 | EA | BROCA COBALTO DWDCO SERIES 27/64 | |
| 261 | 105/206B | WEST SYSTEM EPOXY RESIN KIT | KIT | Used for general coating and bonding applications when extended working and cure time are needed or to provide adequate working time at higher temperatures, Acceptable ratio range by weight 4.84 : 1 to 6.19 :1, Mix viscosity (at 72°F) ASTM D-2393 (725 cps), Specific gravity 1.18 | |
| 262 | AS3209-237 | PACKING PREFORMED | EA | PACKING PREFORMED | X |

| | | | | | |
|---|---|---|---|---|---|
| 263 | LUBRIBOND | LUBRI-BOND® 220 12 OZ AEROSOL CAN | EA | Air drying, MoS2 based solid film lubricant with an epoxy binder system, Density:* 8.3 ± 0.5 lb/gal (995 ± 60 grams/liter), Flash Point: 45°F (7°C),Good corrosion resistance, Fair chemical resistance, Suitable for field applications. | |
| 264 | DWDA/CX61/8 | DRILLS 6¨ 1/8 | EA | BROCA HSS DWDA/C SERIES 6" 1/8 | |
| 265 | DWDN3/8 | DRILLS 3/8 | EA | BROCA H.S.S DWDN SERIES 3/8 | |
| 266 | VINIPEL | VINIPEL 45 Cm X 400 Mt | RO | VINIPEL 45 Cm X 400 Mt | X |
| 267 | RTV102 | Momentive Sealant RTV102 8 oz White, 2.8 oz tube | TB | RTV102, sealants are standard strength paste consistency products which can be applied to vertical and overheadsurfaces where pourable/self-leveling sealants are not practical. Specific Gravity 1.05 Tack-Free Time, minutes 20, Tear Strength, kg/cm (lb/in) 8 (45) | X |
| 268 | 18 X 5,5-10 | TIRE | EA | TIRE 18X5.5 PLY RATING 10,Rated Speed (MPH) 210, Maximum Braking Load (Lbs) 6000, Rated Inflation (PSI) 140 | X |
| 269 | SUPERKOTE 2000 | REFRIGERANTE MOTOR | GL | Anticongelante/ Refrigerante, Líquido verde fluorescente | |
| 270 | MEK | METHIL ETHIL CETONA X 5 GL | PAIL | METIL ETIL CETONA MEK, CAS 78-93-3, Fórmula molecular C4H8O, Punto de Fusión: -87 (-125°F), Masa molar: 72,11 g/mol, Presión de Vapor: 71 a 20 °C | |
| 271 | MAT403 | Heavyweight15" x 20"100 pads per bag | EA | PIG Absorbent Mat Pad: 28 oz Volume Absorbed Per Pad, 22 gal (100 Pads),MaterialPolypropylene Perforated Size10 in x 15 in | X |
| 272 | DWDCO7 | DRILLS No 7 | EA | BROCA COBALTO DWDCO SERIES No 7 | |
| 273 | DWD15J-TN-SET | QUALTECH HSS TIN COATED JOBBERS | EA | DRILL SET Qualtech HSS TIN Coated Jobbers | |
| 274 | DPAS-30W | TAPAOIDOS | BOX | TAPAOIDOS | |
| 275 | TAPE MASKING 1/2 in | CINTA ENMASCARAR 233+ DE 12MM X 55MT = 1/2" | RO | CINTA ENMASCARAR 233+ DE 12MM X 55MT = 1/2" | |
| 276 | KD651511 | FILTER KIT | EA | FILTER KIT | |
| 277 | MIL-PRF-85285E Type I- IV | POLIURETANO VERDE METALIZADO | KIT | Coating with excellent chemical resistance, outstanding toughness, flexibility, abrasion resistance, and excellent outside durability. Conforms to MIL-PRF-85285E Type I- IV, Mix Ratio: 3 : 1 by Volume, Application Thickness: 1.8 - 2.3 mils, Theoretical Coverage: 800-900 ft2 @ 1 mil, Impact Flexibility: 40% Elongation @ RT, Low-Temp Flexibility: 1" mandrel bend @ -65°F | X |
| 278 | MS20995CY15-48 | LOCKWIRE COPPER | LB | COOPER SAFETY WIRE MS20995CY15-48 | X |
| 279 | PWC06-002 | PETROLATUM VV-P-236 - 1 lb Can | LB | Petrolatum white PWC06-002 /VV-P-236 colorless, white grease-like technical grade | |
| 280 | TSD1/8ST | BROCA No 1/8 TALADRO DE 90 | EA | THREADED SHANK DRILLS Stubby Series SIZE 1/8 | |
| 281 | A-A-3097 | ADHESIVE LOCTITE 404, 4 oz | EA | LOCTITE 404 está diseñado para la unión de componentes plásticos y elastómeros, donde sea necesaria una fijación muy rápida. Cianoacrilato de Etilo, Peso específico @ 25 °C 1.09, Temperatura de Transición Vítrea , ASTM E 228, °C 120 | |

| | | | | | |
|---|---|---|---|---|---|
| 282 | HYSOL EA9392 | Loctite EA 9392 AERO Epoxy Adhesive Gray 1 qt Kit | QT / KIT | LOCTITE EA 9392 AERO is a two-component paste adhesive, which cures at room temperature and possesses excellent shear strength at high temperatures Viscosity @ 77°F PART A 4,200 Poise, PART B 6,600 Poise Pot Life (100 g mass) 75 minutes @ 77°F/25°C Method - ASTM D2471 in water bath | |
| 283 | 00116 | LUBRICANT,SOLID FILM LPS1 | EA | Lubricante que proporciona una capa delgada y seca que penetra en las grietas, resistente al aceite, polvo y acumulacion de suciedad, punto de inflamación 175 °F, gravedad especifica .840 aprox, Temperatura de descongelación -35°F | X |
| 284 | PR1782 B-1/2 | ADHESIVE SEALANT | SEMKIT | PR-1782 Class B is a low density, aircraft fuel tank and general purpose sealant It has a service temperature range from -54°C to 121°C (-65°F to 250°F) Tack free time (Hours)<5, Cure time to 35 Shore A* Durometer (hours) 7 | |
| 285 | TSD10ST | BROCA No 10 TALADRO DE 90 | EA | THREADED SHANK DRILLS Stubby Series SIZE 10 | |
| 286 | CS3204A1/2 Flamemaster | SEALING COMPOUND | PINT-KIT | fuel resistant sealant for use on integral fuel tanks and pressurized cabins as well as other areas subject to contact with aircraft fuels, lubricants, oils, water and/or weathering. meets AMS-S-8802E Type 2, Mixing Ratio (by weight) 100:10, Non Volatile Content 86% | |
| 287 | 486719-055 | FUEL SENDER | EA | FUEL SENDER 486719-055 | |
| 288 | AN525-832R8 | SCREW,MACHINE | EA | SCREW,MACHINE | X |
| 289 | DWDCO16 | DRILLS No 16 | EA | BROCA COBALTO DWDCO SERIES No 16 | |
| 290 | BROCHA 3" | BROCHA PELO DE MARTA | EA | BROCHA PELO DE MARTA | X |
| 291 | ST3001-145 | PACKING | EA | PACKING | |
| 292 | MIL-PRF-85285E Type I- IV13655 | POLIURETANO AMARILLO | KIT | Coating with excellent chemical resistance, outstanding toughness, flexibility, abrasion resistance, and excellent outside durability. Conforms to MIL-PRF-85285E Type I- IV, Mix Ratio: 3 : 1 by Volume, Application Thickness: 1.8 - 2.3 mils, Theoretical Coverage: 800-900 ft2 @ 1 mil, Impact Flexibility: 40% Elongation @ RT, Low-Temp Flexibility: 1" mandrel bend @ -65°F | |
| 293 | DWDA/CX65/32 | DRILLS 6¨ 5/32 | EA | BROCA HSS DWDA/C SERIES 6" 5/32 | |
| 294 | CR3243-4-2 | RIVET,BLIND | EA | RIVET,BLIND | X |
| 295 | 7440 | SCOTCH-BRITE REF 7447 X ROLLO DE 6 PULGADAS X 30PIES | RO | SCOTCH-BRITE REF 7447 X ROLLO DE 6 PULGADAS X 30PIES | X |
| 296 | MS24694S-60 | SCREW | EA | SCREW | |
| 297 | DWDCOG | DRILLS LETRA G | EA | BROCA COBALTO DWDCO SERIES SIZE G | |
| 298 | 02591 | 3M LIJA STIK GRANO 220 ROLLO Roll 2-3/4" x 45 yd | RO | 3M LIJA STIK GRANO 220 ROLLO Roll 2-3/4" x 45 yd | X |
| 299 | MS29561-237 | PACKING | EA | PACKING | |
| 300 | 3044590-01 | KIT FUEL MINIFOLD PACKING Y GASKET | KIT | KIT FUEL MINIFOLD PACKING Y GASKET | |

| | | | | | |
|---|---|---|---|---|---|
| 301 | 1300L | SCOTCH GRIP RUBBER ADHESIVE 1300L | QT | 3M™ Neoprene High Performance Rubber & Gasket Adhesives 1300 and 1300L are the most versatile of our rubber and gasket adhesives. Meets specification requirements of MMM-A-121. Temperature performance range is -30°F (-34°C) to 300°F (149°C). Bonding Range: up to 8 minutes. | X |
| 302 | DWD115J-DB-SET | QUALTECH DRILL BLANKS | EA | Qualtech Drill Blanks DWD115J-DB-SET | |
| 303 | TAPE MASKING 1 in | CINTA ENMASCARAR 233+ DE 24MM X 55MT = 1" | RO | CINTA ENMASCARAR 233+ DE 24MM X 55MT = 1" | X |
| 304 | DWDN1/16 | DRILLS 1/16 | EA | BROCA H.S.S DWDN SERIES 1/16 | |
| 305 | SP-1/2 FR25 | SPIROBAND | MT | Spiral band spiral cable wrap SP-1/2 FR25 | |
| 306 | MIL-G-21164 | GRASA AEROSHELL 17 | GL | AEROSHELL 17 IAW AEROSHELL 64 6,6 lb can Extreme pressure Airframe Grease, meets MIL-G-21164 | |
| 307 | NAS1329H4K200L | RIV NUT BLIND | EA | RIV NUT BLIND | |
| 308 | 00316 | LUBRICANTE LPS N°3, 11 OZ | EA | Forms a transparent, soft, waxy film for protection and lubrication,Penetrates to displace moisture, Conforms to: Mil-PRF-16173E Grade 2, Flash Point: (TCC) 100°F (40°C) minimum,Pour Point: 0°F (- 18°C) Propellant: Carbon Dioxide | X |
| 309 | DWDA/CX63/16 | DRILLS 6¨ 3/16 | EA | BROCA HSS DWDA/C SERIES 6" 3/16 | |
| 310 | 103760 | CEPILLO DE COBRE | EA | Cepillo de cerdas de cobre multiusos de plastico color negro | X |
| 311 | MS9386-126 | ORING | EA | O-RING | X |
| 312 | HCS2103NP | HCS2103-NP – ® – Non-Porous Full Roll (38in x 100yds) | RO | Release Fabric Teflon Is a non-porous release teflon coated fiberglass designed for release and resin restriction. Thickness 3 mils (.007in), (0.8mm), maximum use temp 550 °F (288 °C) | |
| 313 | DWDCOH | DRILLS LETRA H | EA | BROCA COBALTO DWDCO SERIES SIZE H | |
| 314 | TSD5ST | BROCA No 5 TALADRO DE 90 | EA | THREADED SHANK DRILLS Stubby Series SIZE 5 | |
| 315 | SILICONE SPRAY 8034 | SILICONE SPRAY 8034, 10.5 OZ AEROSOL | EA | Industrial grade silicone forms a clear, thin, non-sticky, water repellent lubricating film. Use at temperatures between 40°F and 110°F (5°C and 43°C), Color: Colorless, transparent, Specific gravity @70°F 0.70 | |
| 316 | HYSOL EA 9340 | Loctite Hysol 9340 Epoxy Adhesive - 5 lb Kit | KIT | Loctite® Hysol® 9340 is a general purpose adhesive with exceptional high temperature performance. Pot Life @ 77°F, 100 grams mins mixed 90, Cure Schedule 3 Days @ 77°F,Test Temp °F -40, Typical Value 2100, Hardness, Shore D >80 | |
| 317 | 206-076-034-003 | ELEMENT FILTER | EA | ELEMENT FILTER | |
| 318 | AV8 | CORROSION PREVENTIVE,AIRCRAFT PAIL X 5GL | PAIL | Super-Penetrating, Water-Displacing, Corrosion Inhibiting Compound, hydrocarbon with 0.5% aromatics max, flash point 104°F (40°C), viscosity 71 sec. Meets MIL-C-16173 D, GRADE 4 | |
| 319 | DUL5SET | SOLID CARBIDE BUR SETS | EA | SOLID CARBIDE BUR SETS (SA42, SA43, SC42, SD42, SE41, SF42, SG41, SG43, SH41, SM43 & SN42 ) 11 PC | |

| | | | | | |
|---|---|---|---|---|---|
| 320 | RTV108 | MOMENTIVE SEALANT RTV108 TRANSLUCENT, 2.8 OZ TUBE | TB | RTV108 sealants are standard strength paste consistency products which can be applied to vertical and overhead surfaces where pourable/self-leveling sealants are not practical. Tack-Free- Time 20 min, Elongation % 400, Hardness Shore A 30 | |
| 321 | ALCOHOL ISOPROPILICO CANECA | ALCOHOL ISOPROPILICO TT-I-735 CANECA X 55GL | DRUM | Meets Grade A estándar for TT-I-735, Purity >99,8%,Acidity (% of acetic acid) ≤0.001, Density @ 20 °C 0.785—0.786 g/mL , Specific gravity @20 °C / 20 °C 0.785—0.787 g/mL | X |
| 322 | AV100 | CORROSION PREVENTIVE,AIRCRAFT X 5GL | PAIL | Heavy duty water displacing, corrosion inhibiting compound, Flash Point 38 °C / 100 °F minimum , Density at 23 °C (73 °F) 990 kg/m³ , Application Temperature 15 to 30 °C / 60 to 85 °F , Colour Transparent, beige , Film Appearance Firm waxy film | |
| 323 | NLGI GRADE 2 | AERIOL THIXOGREASE2 GREASE 3810-0 BROWN, 425 G TUBE | TB | Aviation Grease uses an advanced thickening agent and superior additive technology which exhibits a high resistance to water washout, and is ideal for preventing corrosion on components which can result in longer life and increased productivity, 3810-0 (425g tube x60) Meets or Exceeds the following: BELL Consumable Material Ref C-561, Density @ 20°C (g/mL) 1.05, Pour Point (°C) -15 (5 °F) | |
| 324 | PWC09-005 | SILICONE GREASE | EA | Hylomar PL32M (Medium) Aerograde Highly engineered, polyester-urethane based non-setting and nonhardening gasketing compound, for use in the aeronautical industry for sealing joints in jet turbine engines NSN 8030-99-220-2370 | |
| 325 | AMS-S-8802 (PS890 B 1/2) | ADHESIVE SEALANT | QT / KIT | P/S 890 Class B is an aircraft integral fuel tank sealant. It has a service temperature range from -65°F (-54°C) to 250°F (121°C), with intermittent excursions up to 275°F (135°C).with AMS-S-8802 Class B specification, Tack free time (hours) <4, Cure time to 35 A Durometer (hours) 30, Cured specific gravity 1.55 | |
| 326 | OVEROLES TYVEK DUPONT | OVEROLES TYVEK DUPONT | EA | OVEROLES TYVEK DUPONT | X |
| 327 | MS35769-26 | GASKET | EA | GASKET | |
| 328 | 3070542-01 | FILTER FUEL PUMP | EA | FILTER FUEL PUMP | |
| 329 | 3010880 | GASKET | EA | GASKET | |
| 330 | B34994-8 | CLEANEAR SAMPLING KIT, OIL | KIT | CLEANEAR SAMPLING KIT, OIL | |
| 331 | PWC06-023 | ANTI-SEIZE X LB | LB | Lubricante para roscas a base de aceite es para uso en acero inoxidable y aleaciones de alta temperatura. Puede funcionar a temperaturas de hasta 1500 °F (815 °C).Pratt & Whitney Canadá Especificación: PWC06-023 | |
| 332 | MIL-PRF-85285E Type I- IV 11350 | POLIURETANO ROJO | KIT | Coating with excellent chemical resistance, outstanding toughness, flexibility, abrasion resistance, and excellent outside durability. Conforms to MIL-PRF-85285E Type I- IV, Mix Ratio: 3 : 1 by Volume, Application Thickness: | X |

| | | | | | |
|---|---|---|---|---|---|
| | | | | 1.8 - 2.3 mils, Theoretical Coverage: 800-900 ft2 @ 1 mil, Impact Flexibility: 40% Elongation @ RT, Low-Temp Flexibility: 1" mandrel bend @ -65°F | |
| 333 | MIL-G-7711A 14 oz Tube | AEROSHELL GREASE 6 14 oz Tube | TB | General purpose airframe grease for use in antifriction bearings, gearboxes and plain bearings within the temperature range of -40°C to + a121°Cm, meets MIL-G-7711A | X |
| 334 | 130-AA | GREASE UTILITY 16 OZ TUBE | TB | Grease designed for those applications where a grease type lubricant possessing extremely good water repellency and superior lubrication characteristics are desired. NLGI No. 1, Mineral Oil Viscosity: cSt @ 40°C (135) | |
| 335 | TT-N-95, Type II | ALIPHATIC NAPTHA | GL | TT-N-95B, TYPE II: For cleaning acrylic plastics, VOLATILE ORGANIC COMPOUNDS.... 706 - 766 grams/liter, SPECIFIC GRAVITY .708 - .768 , DENSITY. 5.89 - 6.39 lbs/gal | |
| 336 | AS3208-18 | ORING | EA | O-RING | X |
| 337 | AS3209-235 | PACKING PREFORMED | EA | PACKING PREFORMED | X |
| 338 | 800L5 | GUANTES DE NITRILO | BOX | GUANTES DE NITRILO | |
| 339 | HCS2102-10 | Heatcon HCS2102-10 Breather Full Roll (60in x 50yds) | RO | The Breather/Bleeder Cloth HCS2102-10 QMF17 is a needlepunch polyester breather system commonly used as a vacuum transfer medium in the vacuum bagging process 10oz Weight, Used at pressures up to 200 psi (13.8 bars) Max. recommended use temp: 400°F (204°C). | |
| 340 | MS20995C32 | LOCK WIRE | LB | MS20995C32 Stainless Steel 0.032" Diameter Safety Wire - 1 lb Roll | X |
| 341 | DWDA/CX61/4 | DRILLS 6¨ 1/4 | EA | BROCA HSS DWDA/C SERIES 6" 1/4 | |
| 342 | MIL-C-5040, Type III | Cord, Fibrous, Nylon, X 100 FT | RO | Military Specification MIL-C-5040 Type III Black Paracord X 100 FT | |
| 343 | PAPEL KRAFT | PAPEL KRAFT ROLLO DE 160 CM X 200 METROS | RO | PAPEL KRAFT ROLLO DE 160 CM X 200 METROS | X |
| 344 | DWDCO57 | DRILLS No 57 | EA | BROCA COBALTO DWDCO SERIES No 57 | |
| 345 | LUBEREX 10-1206 | LUBEREX 10-1206 | EA | Superior calcium stearate base grease compound for general use in industry, Part No. 10-1206 2 fl. oz. Tube | |
| 346 | TSD30ST | BROCA No 30 TALADRO DE 90 | EA | THREADED SHANK DRILLS Stubby Series SIZE 30 | |
| 347 | 222K68-2 | TIRE | EA | SIZE 22X6.5-10 PLY RATING 6,Rated Speed (MPH) 190, Maximum Braking Load (Lbs) 4200, Rated Inflation (PSI) 68 | X |
| 348 | MIBK | METHIL ISOBUTIL CETONA X 5 GL | PAIL | Methyl isobutyl ketone (MIBK) is a clear, colorless organic liquid compound. MIBK is used as a chemical intermediate, a solvent for manufacturing paints, Molecular Weight 100.2 g/mol, Freezing Point -84.7°C (-120°F), Boiling Point @ 760mmHg 115°C (239°F) | |
| 349 | M25988/1-916 | PACKING FUEL | EA | PACKING FUEL | |
| 350 | HUT80 | INDEXES & DISPENSERS | EA | 80PC Wire Gauge Sizes #1 to #80 | |
| 351 | DWDN17/32 | DRILLS 17/32 | EA | BROCA H.S.S DWDN SERIES 17/32 | |

| | | | | | |
|---|---|---|---|---|---|
| 352 | 318K28-1 | TIRE | EA | SIZE 31X9.75-14 PLY RATING 12,Rated Speed (MPH) 190, Maximum Braking Load (Lbs) 16650, Rated Inflation (PSI) 115 | X |
| 353 | RTV730 | DOWSIL 730 White Solvent Sealant - 90 mL Tube | TB | One-component fluorosilicone adhesive/sealant, Stable and flexible from -65ºC (-85ºF) to 260ºC (500ºF), Acetoxy cure system. | |
| 354 | VELCRO | VELCRO NEGRO MACHO Y HEMBRA X 25 MTS | RO | VELCRO NEGRO MACHO Y HEMBRA X 25 MTS | X |
| 355 | MS24693-S29 | SCREW | EA | SCREW | |
| 356 | HYSOL EA956NA | LOCTITE ADHESIVE | QT / KIT | Hysol EA 956 is a two-component adhesive, which has excellent elevated temperature strength. Viscosity, 77°F PART A 350 Poise, PART B 20 Poise, MIXED 162 Poise, Viscosity, 25°C PART A 35 Pa·S, PART B 2 Pa·S. | |
| 357 | MIL-PRF-23699 | OIL MOTOR 2380 | QT | Turbine oil qualified and approved for MIL-PRF-23699,Viscosity, Kinematic @ 100°C 4.97 mm/s, Flash Point 265 °C | X |
| 358 | MS28778-4 | PACKING | EA | PACKING | |
| 359 | MIL-PRF-85285E Type I- IV | POLIURETANO GRIS METALIZADO | KIT | Coating with excellent chemical resistance, outstanding toughness, flexibility, abrasion resistance, and excellent outside durability. Conforms to MIL-PRF-85285E Type I- IV, Mix Ratio: 3 : 1 by Volume, Application Thickness: 1.8 - 2.3 mils, Theoretical Coverage: 800-900 ft2 @ 1 mil, Impact Flexibility: 40% Elongation @ RT, Low-Temp Flexibility: 1" mandrel bend @ -65°F | X |
| 360 | TSD1/4ST | BROCA No 1/4 TALADRO DE 90 | EA | THREADED SHANK DRILLS Stubby Series SIZE 1/4 | |
| 361 | HYSOL EA 9309.3NA | LOCTITE® EA 9309.3NA AERO Adhesive Quart Kit | QT / KIT | LOCTITE EA 9309.3NA AERO is a toughened two-part paste adhesive. It contains 5 mil/0.13 mm glass beads for bondline thickness control, Pot Life (450 gram mass) 35 minutes @ 77°F/25°C Method - ASTM D2471 in water bath. Density (g/ml) PART A 1.15, PART B 1.0 | |
| 362 | MS20995CY20 | LOCKWIRE COPPER | LB | MS20995CY20 Copper 0.020 Diameter Breakaway Wire - 1 lb Roll | X |
| 363 | 609 | LOCTITE 609, 50 ML | EA | Designed for the bonding od cylindrical fitting parts, tested for Mil-R-46082B, Specific gravity @ 25°C, 50 mL (1.69 oz) Bottle | |
| 364 | JET OIL 254 | MIL-PRF-23699 | QT | Aircraft-type gas turbine lubricantApproved against U.S. Military Specification Mil-PRF23699F High Thermal Stability (HTS) Flash Point, ºC (ºF), ASTM D 92 254 (489), Fire Point, ºC (ºF) 288 (550) | X |
| 365 | 1741040-01 | FACE FILTER OIL | EA | FACE FILTER OIL | |
| 366 | CADMIUM LHE 5070 /SPS50705LT | PLATING SOLUTION BOTTLE X 5 LT OR 5 BOTTLES X LT | EA | Cadmium CODE 5070, Purity of deposit: >99%, ph: 7,7 type : ferous & non ferrous, Specification AMS 2451 /4B, UN2922, Corrosive Liquid, Toxic. | X |

## CONDICIONES TECNICAS ADICIONALES DE OBLIGATORIO CUMPLIMIENTO

| ITEM | ESPECIFICACIONES DE VERIFICACION TECNICA | CUMPLE | NO CUMPLE |
|---|---|---|---|
| 1 | En el momento de la entrega de los productos, el contratista deberá presentar al personal técnico y almacenista y facilitar el certificado de conformidad o la respectiva información que permita establecer la trazabilidad del producto (certificado de conformidad (COC), certificado de análisis, informe de prueba, FORMA 8130-3, o equivalentes (EASA Form 1, TCCA Form One en caso que aplique), emitido por la casa fabricante respectiva con cada elemento. En dichos documentos deberá figurar el lote, fecha de fabricación y fecha de expiración en los casos aplicables y especialmente para ítems que tengan tiempo de vencimiento. Los elementos consumibles, insumos y químicos aeronáuticos deberán entregarse en el embalaje propio con el que el fabricante los ofrece en el mercado | X | |
| 2 | El contratista presentará mediante carta de compromiso y brindará respaldo postventa y/o garantía de los productos (1 AÑO) en cualquier momento en caso que sea requerido un cambio del material por defectos o inconsistencias documentales. Cuando se requiera hacer efectiva la garantía, el oferente se compromete a cumplirla en un tiempo máximo de 10 días calendario, asumiendo en su totalidad los gastos que se generen en dicho proceso. | X | |
| 3 | **ENTREGA DE INSUMOS CONSUMIBLES NO PREVISTOS EN LA LISTA**<br>La Dirección de Antinarcóticos en cabeza del supervisor del Contrato podrá solicitar productos y/o consumibles adicionales o imprevistos a los descritos anteriormente.<br>**Procedimiento para la adquisición:**<br>El supervisor podrá realizar un estudio de mercado (tres cotizaciones incluida la del contratista, el cual deberá suministrar la cotización con un plazo no superior a 5 días calendario).<br>El futuro contratista tendrá la obligación de suministrar los consumibles adicionales previo cumplimiento de los siguientes pasos:<br>1. Aprobación por parte del supervisor.<br>2. Requerimiento formal de los consumibles al contratista. | X | |
| 4 | Análisis de precio del CONSUMIBLE NO PREVISTO<br>Dentro de las funciones de verificación y control de precios por parte del supervisor del contrato, tratándose de los elementos no matriculados y que sean solicitados vía cotización;<br>El funcionario supervisor podrá;<br>· solicitar al contratista que presente un mejor valor de venta debido a la tendencia histórica de adquisición del componente o de cotizaciones en el mercado,<br>en cuyo caso el contratista deberá verificar esta situación y ajustar su oferta a los precios del mercado si esto resulta viable,<br>En caso contrario deberá sustentar los motivos por los cuales no puede realizar los ajustes antes mencionados. | X | |
| 5 | El contratista se compromete a que en todos los casos los productos y/o consumibles a adquirir deben cumplir con las características técnicas aprobadas por el fabricante debidamente certificado y en condición NUEVO. | X | |
| 6 | **TIEMPOS DE ENTREGA:**<br>Por tratarse de un contrato de suministro (Tracto sucesivo), los elementos requeridos serán entregados en un plazo máximo de 20 días calendario para la entrega de productos nacionales contados a partir de la solicitud del supervisor del contrato; los elementos que sean objeto de importación tendrán como máximo un tiempo de entrega de 60 días calendario, de acuerdo a las necesidades de la institución, previa coordinación con el supervisor del contrato. | X | |

| | | | |
|---|---|---|---|
| | En el evento que por programación de producción del fabricante de un ítem se exceda los 15 días para su entrega, esta se podrá extender siempre y cuando no supere los términos de ejecución del contrato y previa certificación emitida por la casa fabricante. | | |
| **7** | El oferente deberá suministrar la última versión del material producto y/o consumible, y en el evento que un ítem sea objeto de actualización tecnológica por parte del fabricante se deberá coordinar con el supervisor del contrato para su aceptación. | **X** | |
| **8** | Para los productos y/o consumibles que tienen vida útil, no se recibirán elementos consumibles insumos y químicos aeronáuticos que tenga menos del 60% de vida útil (Shelf life), para aquellos elementos consumibles que su vida útil sea inferior a 18 meses, no se recibirán elementos que tengan menos del 90% de la vida útil (shelf life), a menos que exista concepto de validación por parte del Inspector de la Línea o Taller y en coordinación con el Supervisor del Contrato y se considere necesidad del servicio. | **X** | |
| **9** | El contratista se compromete a suministrar junto con los elementos físicos la declaración de importación de dichos bienes debidamente tramitada. | **X** | |
| **10** | El contratista se compromete que durante la ejecución y liquidación del contrato se cumplirá con la normatividad ambiental vigente. Igualmente, el contratista entregará en medio magnético y físico, las hojas de seguridad –MSDS- material safety data sheets-, de los elementos químicos y las traducciones simples o certificadas al idioma español. | **X** | |
| **11** | Punto de contacto y servicio 24 horas. Para garantizar una fluida ejecución del contrato, el futuro contratista se compromete a colocar a disposición del Supervisor, un representante con teléfono fijo y/o celular que atienda las solicitudes 24 horas al día.<br>En el momento de la celebración del contrato deberá informarse por escrito especificando la anterior información.<br>Los tiempos de respuesta para cotización de elementos no deberán exceder 5 días hábiles en un número de hasta 30 ítems. De requerirse un tiempo mayor esto será previamente concertado con el Supervisor del Contrato. | **X** | |
| **12** | El embalaje observará las normas internacionales de transporte de mercancía estipuladas por la OACI. | **X** | |
| **13** | **PROCEDIMIENTO DE CANCELACIONES Y AMPLIACIONES DE PLAZO DE ENTREGA.**<br>En el caso de darse situaciones referentes a la no consecución de un ítem por razones atribuibles UNICAMENTE a la rigidez de la programación de su producción en fábrica, o ser considerado un ítem descontinuado, el futuro contratista deberá dentro de los siguientes 10 días calendario a la solicitud informar por escrito así:<br>Presentar documento emitido por el fabricante o distribuidor autorizado del fabricante referente a las razones por las cuales dicho(s) elemento(s) no pueden ser suministrados o la necesidad de extender su plazo de entrega.<br>Referente a **CANCELACIONES DE ITEMS** el supervisor del contrato podrá cancelar uno o varios ítems después de haber radicado la respectiva solicitud del consumible al contratista, siempre que no haya transcurrido 15 días hábiles | **X** | |
| **14** | El oferente que participe en el presente proceso, debe presentar junto con la oferta copia del CERTIFICADO DE CARENCIA DE INFORMES POR TRÁFICO DE ESTUPEFACIENTES PARA EL MANEJO DE SUSTANCIAS Y PRODUCTOS QUÍMICOS CONTROLADOS CON UNA FECHA DE VIGENCIA MÍNIMA A LA FECHA DE EJECUCIÓN DEL FUTURO CONTRATO MAS 3 MESES, expedida por EL MINISTERIO DE JUSTICIA Y DEL DERECHO – SUBDIRECCION DE CONTROL Y FISCALIZACION DE SUSTANCIAS QUIMICAS Y ESTUPEFACIENTES, A NOMBRE EXCLUSIVAMENTE DEL PROPONENTE (no se acepta la presentación de certificado de terceros), cuya duración debe estar vigente desde la presentación de la oferta, hasta como mínimo el término de ejecución más 3 meses por temas de garantía, permitiéndose como oferente poder garantizar la disponibilidad de las cantidades mínimas para suministrar las | **X** | |

| | | | |
|---|---|---|---|
| | sustancias controladas en los bienes que apliquen en el presente estudio previo, requiriendo cantidades mínimas así:<br>**SUSTANCIA REQUERIDA** / **ACTIVIDAD** / **CANTIDAD** / **UNIDAD**<br>ACETONA / ABC / 80 / KG<br>ALCOHOL ISOPROPILICO / ABC / 800 / KG<br>METIL ETHIL CETONA MEK / ABC / 600 / KG<br>METIL ISOBUTIL CETONA MIBK / ABC / 250 / KG<br>THINNER / ABC / 1200 / GL<br>TOLUENO / ABC / 200 / KG<br>**Nota:** Las cantidades aquí exigidas son el resultado de proyección del consumo en un año de estas sustancias controladas por las diferentes Compañías Antinarcóticos de Aviación. | | |
| **15** | El contratista deberá dar cumplimiento a lo establecido en el Decreto 1496 del 6 de agosto del 2018, en lo que respecta con la adopción del sistema globalmente armonizado de clasificación y etiquetado de productos químicos- sga de la organización de las naciones unidas, sexta edición revisada 2015 y de acuerdo a los tiempos establecidos por el ministerio de trabajo, agricultura, y desarrollo rural, transporte y salud y protección social, de acuerdo a las competencias establecidas en el presente decreto. | **X** | |
| **16** | El contratista deberá presentar junto con la oferta certificación suscrita por el representante legal y/o el responsable de seguridad y salud en el trabajo, en la cual se indique el porcentaje de cumplimiento del Sistema de Gestión de Seguridad y Salud en el Trabajo (SG-SST) de acuerdo a lo establecido en la Resolución No.0312 de 2019. | **X** | |
| **17** | El contratista deberá entregar 3 (tres) bombas manuales de extracción de líquidos, y por cada caneca de 50 galones o más deberá entregar kit de reenvase de consumibles compuesto de 5 envases de 5 galones y guantes de seguridad | **X** | |

### 5.5 Registro Fotográfico

**REGISTRO FOTOGRÁFICO**






**REGISTRO FOTOGRÁFICO**









## 6. Actividades de Control y Pagos

| ENTREGAS REGISTRADAS | | | | | |
|---|---|---|---|---|---|
| Cantidad | Descripción | No. Factura | Valor | Fecha - recibo a satisfacción | Valor acta -recibo a satisfacción |
| 12 | FILTRO DE ACEITE | | $ 510.241,08 | | |
| 2 | POLIURETANO AZUL | | $ 3.023.651,16 | | |

| | | | | | |
|---|---|---|---|---|---|
| 12 | FILTRO DE COMBUSTIBLE PRIMARIO | 1 | $ 2.437.762,08 | 22/08/2023 | **$363.025.278,14** |
| 4 | THINNER EXTRAFINO DE 52 GL | | $ 35.868.354,76 | | |
| 12 | FILTRO DE AIRE | | $ 11.823.769,56 | | |
| 10 | POLIURETANO BLANCO BRILLANTE | | $ 13.228.473,90 | | |
| 5 | POLIURETANO COLOMBIAN POLICE BLUE METALLIC | | $ 14.173.364,85 | | |
| 12 | FILTRO SEPARADOR DE AGUA | | $ 3.456.178,80 | | |
| 5 | TOLUENO X 5 GL | | $ 739.875,50 | | |
| 2 | POLIURETANO GRIS MATE | | $ 2.645.694,78 | | |
| 2 | REMOVEDOR DE PINTURA X 5 GL | | $ 3.779.563,96 | | |
| 50 | WYPALL X-80 REGULAR | | $ 3.307.118,50 | | |
| 2 | EPOXY PRIMER MIL-PRF-23377K TY 1 CL C2 | | $ 1.700.803,78 | | |
| 5 | CLEAR URETHANE | | $ 6.614.236,95 | | |
| 2 | POLIURETANO VERDE METALIZADO | | $ 5.669.345,94 | | |
| 6 | ALCOHOL ISOPROPILICO TT-I-735 CANECA X 55GL | | $ 66.969.674,58 | | |
| 35 | PAPEL KRAFT ROLLO DE 160 CM X 200 METROS DE LARGO, PAPEL DE 60 GRAMOS | | $ 4.133.897,95 | | |
| 5 | POLIURETANO GRIS METALIZADO | | $ 14.173.364,85 | | |
| 1 | SERVICE,WASTE DISPOSAL PAIL | | $ 2.314.982,93 | | |
| 24 | LOCK WIRE | | $ 6.730.453,44 | | |
| 20 | O-RING | | $ 109.142,40 | | |
| 100 | SCREW,MACHINE | | $ 196.171,00 | | |
| 10 | SOCKET FLUORESCENT LIGHTS | | $ 367.519,60 | | |
| 2 | CROCUS CLOTH 9" × 11" PACK X 5 | | $ 1.105.115,68 | | |

| | | | | | |
|---|---|---|---|---|---|
| 150 | Lubricante Multiusos 382 ml/11 oz. | | $ 4.663.036,50 | | |
| 50 | PACKING | | $ 1.212.694,50 | | |
| 10 | FILTRO DE COMBUSTIBLE PRIMARIO | | $1.894.834,90 | | |
| 1 | CABLE X 1000 FT | | $ 5.214.267,07 | | |
| 20 | PACKING | | $ 354.713,00 | | |
| 15 | OIL FILTER | | $ 5.393.458,05 | | |
| 10 | FILTRO DE ACEITE | | $ 1.136.900,90 | | |
| 200 | SCREW,MACHINE | | $ 197.062,00 | | |
| 5 | SHEET METAL 0,020 | | $ 7.579.339,50 | | |
| 100 | O-RING | | $ 288.015,00 | | |
| 100 | PACKING | | $ 833.727,00 | | |
| 5 | TEMP-PLATE | | $ 2.610.999,55 | | |
| 400 | PIN COTTER | | $ 2.425.388,00 | | |
| 4 | SCRAPER PLASTIC | | $ 586.511,80 | | |
| 3 | SHEET METAL | | $ 6.730.453,47 | | |
| 3 | LIJA Stikit De 3m 2599 P80 | | $ 1.493.042,10 | | |
| 200 | SCREW,MACHINE | | $ 500.236,00 | | |
| 325 | CINTA ENMASCARAR 233+ DE 18MM X 55MT= 3/4" | | $ 2.789.910,50 | | |
| 7 | Devcon® 14310 2-Ton - 25 mL Tube | | $ 1.657.759,25 | | |
| 250 | CINTA ENMASCARAR 233+ DE 6MM X 55MT= 1/4" | | $ 1.444.975,00 | | |
| 200 | Scotch-Brite Roloc Blue 2" | | $ 8.813.944,00 | | |
| 25 | BROCHA PELO DE MARTA | | $ 2.051.689,00 | | |
| 360 | WASHER | | $ 763.999,20 | | |
| 3 | VELCRO BLACK LOOP 50 MM X 25M | | $ 229.608,51 | | |
| 100 | LIMPIADOR DE TAPIZADO ESPUMA x 400ml | | $ 2.541.757,00 | | |
| 12 | PIN COTTER 1/16 | | $ 10.914,24 | | |
| 100 | BROCHA 1" IN | | $ 349.610,00 | | |
| 100 | WASHER | | $ 174.325,00 | | |

| | | | | | |
|---|---|---|---|---|---|
| 1 | HIDRAULICO 756 | | $ 137.977,71 | | |
| 20 | REMOVAL AND INSERT PLASTICO VERDE | | $ 1.410.677,80 | | |
| 100 | BROCHA 2" IN | | $ 1.407.888,00 | | |
| 5 | SHEET METAL | | $ 7.579.339,50 | | |
| 1000 | SCREW | | $ 2.349.600,00 | | |
| 200 | CINTA ENMASCARAR 233+ DE 36MM X 55MT = 1 1/2 PULGADA | | $ 4.189.648,00 | | |
| 25 | BROCHA PELO DE MARTA | | $ 2.051.689,00 | | |
| 30 | PACKING PREFORMED | | $ 682.140,60 | | |
| 1 | LOCKWIRE COPPER | | $ 3.902.374,52 | | |
| 200 | SCREW,MACHINE | | $ 485.078,00 | | |
| 30 | BROCHA PELO DE MARTA | | $ 2.462.026,80 | | |
| 100 | RIVET,BLIND | | $ 24.253.886,00 | | |
| 2 | SCOTCH-BRITE REF 7447 X ROLLO DE 6 PULGADAS X 30PIES | | $ 716.227,38 | | |
| 15 | SCOTCH GRIP RUBBER ADHESIVE 1300L | | $ 8.025.844,20 | | |
| 40 | CEPILLO DE COBRE | | $ 238.112,40 | | |
| 100 | OVEROLES TYVEK DUPONT | | $ 2.626.324,00 | | |
| 15 | LOCK WIRE | | $ 1.309.709,85 | | |
| 35 | PAPEL KRAFT ROLLO DE 160 CM X 200 METROS DE LARGO, PAPEL DE 60 GRAMOS | | $ 4.133.897,95 | | |
| 3 | VELCRO NEGRO HEMBRA X 25 MTS | | $ 206.647,65 | | |
| 153 | OIL MOTOR 2380 | | $ 22.836.011,94 | | |
| 1 | LOCKWIRE COPPER | | $ 2.998.247,77 | | |
| 10 | TIRE | 2 | $ 67.117.449,50 | 18/08/2023 | **$ 215.109.670,48** |
| 12 | FILTRO DE ACEITE | | $ 737.014,92 | | |
| 12 | AIR FILTER | | $ 1.481.162,64 | | |
| 10 | FUEL FILTER | | $ 606.347,20 | | |
| 12 | BATERIAS F5-16NP 350 AMP | | $ 43.068.482,04 | | |

| | | | | | |
|---|---|---|---|---|---|
| 4 | TIRE | | $ 25.007.060,88 | | |
| 18 | TIRE | | $ 65.205.621,90 | | |
| 4 | TIRE | | $ 11.814.531,40 | | |

| Año | Mes de Pago | No. Factura pagada | Valor | Valor amortizado por concepto de anticipo | Porcentaje del anticipo (%) |
|---|---|---|---|---|---|
| 2023 | JULIO | N/A | $ 0,00 | $ 0,00 | N/A |
| 2023 | AGOSTO | N/A | $ 0,00 | $ 0,00 | N/A |
| 2023 | SEPTIEMBRE | 1 | $ 363.025.278,14 | $ 0,00 | N/A |
| | | 2 | $215.109.670,48 | $ 0,00 | N/A |
| 2023 | OCTUBRE | N/A | $ 0,00 | $ 0,00 | N/A |
| 2023 | NOVIEMBRE | N/A | $ 0,00 | $ 0,00 | N/A |
| 2023 | DICIEMBRE | N/A | $ 0,00 | $ 0,00 | N/A |
| **TOTAL** | | | $ 578.134.948,62 | $ 0,00 | N/A |
| **SALDO** | | | $ 3.806.240.051,37 | $ 0,00 | N/A |

### 7. Porcentajes de Ejecución

| CONCEPTO | Fecha | % de ejecución |
|---|---|---|
| Porcentaje de ejecución física | **30/11/2023** | **47,4%** |
| Porcentaje de ejecución presupuestal | **30/11/2023** | **13,19%** |

### 8. Aportes a la Seguridad Social y Parafiscales

| Pagos de Aportes a la Seguridad Social y Parafiscales | Cumple | No cumple | Observaciones |
|---|---|---|---|
| Verificación cumplimiento Aportes parafiscales SENA, SALUD, EPS, ARL, Etc. | **X** | | Se anexa con cuenta de facturación |

### 9. Información Contrato Adición, Prórroga, Modificación, Suspensión, Reinicio y Aclaratoria

| CLASE | No. | fecha | valor | Tiempo | Observaciones |
|---|---|---|---|---|---|
| Adición | 1 | 24/08/2023 | $1.200.000.000,00 | N/A | Es pertinente dar continuidad al contrato con el fin de garantizar la puesta en funcionamiento y aeronavegabilidad de las aeronaves de la Policía Nacional. |
| Prorroga | 1 | 24/08/2023 | N/A | 30/11/2023 | |
| | 2 | 16/11/2023 | N/A | 22/12/2023 | |
| Modificación | 1 | 05/10/2023 | N/A | 30/11/2023 | |
| | 2 | 16/11/2023 | N/A | 22/12/2023 | |
| Suspensión | | | | | N/A |
| Reinicio | | | | | N/A |
| Aclaratoria | 1 | 16/11/2023 | | 22/12/2023 | Aclarando el valor unitario del elemento I-616C5TB |

| | | | | | |
|---|---|---|---|---|---|
| Otros | | | | | N/A |

**Nota 1:** El supervisor del contrato deberá verificar la publicación de los documentos que hacen parte del proceso contractual en la Plataforma Electrónica SECOP II o la plataforma que haga sus veces.

**10. Información de Pólizas**

| Aseguradora | | No. Póliza | Fecha de expedición | Valor Total Asegurado |
|---|---|---|---|---|
| SEGUROS MUNDIAL | | CSC-100034353 | 11/07/2023 | $5.769.179,50 |
| Amparo | % | Valor | Fecha Inicio | Fecha Terminación |
| Cumplimiento | 30 | $955.312.500,00 | 06/07/2023 | 24/02/2024 |
| Calidad | 50 | $1.592.187.500 | 06/07/2023 | 24/08/2024 |

**ADICIÓN Y PRORROGA 1**

| Aseguradora | | No. Póliza | Fecha de expedición | Valor Total Asegurado |
|---|---|---|---|---|
| SEGUROS MUNDIAL | | CSC-100034353 | 6/07/2023 | $3.507.500,00 |
| Amparo | % | Valor | Fecha Inicio | Fecha Terminación |
| Cumplimiento | 30 | $1.315.312.500,00 | 24/08/2023 | 30/05/2024 |
| Calidad | 50 | $2.192.187.500,00 | 24/08/2023 | 30/11/2024 |

**PRORROGA 2**

| Aseguradora | | No. Póliza | Fecha de expedición | Valor Total Asegurado |
|---|---|---|---|---|
| SEGUROS MUNDIAL | | CSC-100034353 | 30/11/2023 | $3.507.500,00 |
| Amparo | % | Valor | Fecha Inicio | Fecha Terminación |
| Cumplimiento | 30 | $1.315.312.500,00 | 06/07/2023 | 22/12/2024 |
| Calidad | 50 | $2.192.187.500,00 | 06/07/2023 | 22/12/2024 |

**Nota 2:** En caso de requerirse actualización de pólizas anexar cuadro detallado de las mismas.


**11. Información Debido Proceso**

| | |
|---|---|
| Plazo de ejecución | N/A |
| Motivo de presunto incumplimiento | N/A |
| Fecha en que se informa a la entidad el presunto incumplimiento | N/A |
| Fecha de citación inició de la actuación administrativa sancionatoria | N/A |
| Avances de la novedad presentada por el presunto incumplimiento | N/A |
| Estado a la fecha | N/A |

**Nota 3**: La información aquí suministrada es la reportada por el (los) supervisor (es) del contrato, por lo tanto, la veracidad, claridad y exactitud de la misma, será única y exclusivamente responsabilidad del supervisor.

**12. Observaciones del Supervisor**

**N/A**

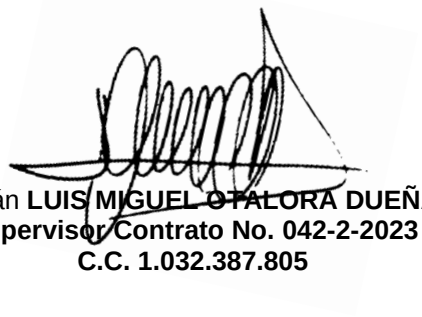

Capitán **LUIS MIGUEL OTALORA DUEÑAS**
**Supervisor Contrato No. 042-2-2023**
**C.C. 1.032.387.805**