
EVEREADY BATTERY CO. 1-800-383-7323 / USA
Internet: www.energizer.com 1-800-383-7323 / CANADA
+ 44 (0) 208 920 2306 / EUROPE

ENERGIZER NO. CR2032



Industry Standard Dimensions in mm (inches)

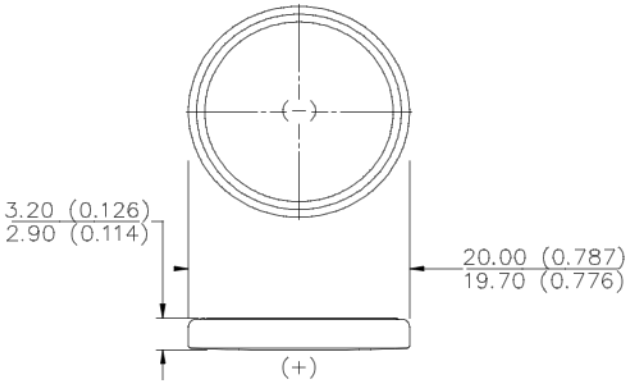


THIS BATTERY HAS UNDERWRITERS LABORATORIES COMPONENT RECOGNITION

Chemical System: Lithium / Manganese Dioxide (Li/MnO_2)

Designation: ANSI / NEDA-5004LC, IEC-CR2032
Battery Voltage: 3.0 Volts
Average Weight: 3.3 grams (0.12 oz.)
Volume: 1.0 cubic centimeters (0.06 cubic inch)
Average Capacity: 225 mAh to 2.0 volts
(Rated at 10k ohms continuous at 21°C)
Maximum Reverse Charge Current: 1 microampere
Energy Density: 198 milliwatt hr/g, 653 milliwatt hr/cc

TYPICAL DISCHARGE CURVE
Simulated Test @ 21°C (70°F)

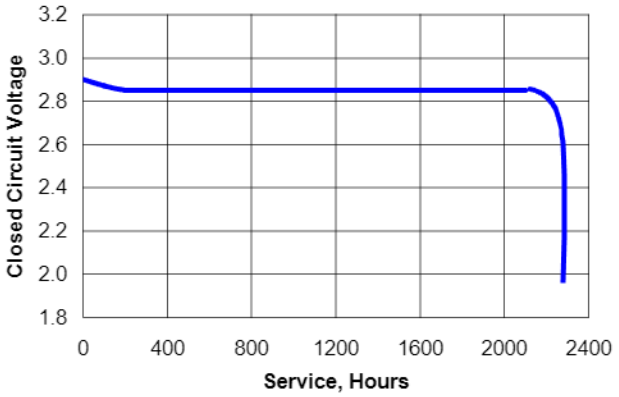


Simulated Application Test
Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 2.9V (microamperes)	Load (ohms)	Cutoff Voltage 2.0V
24 hours/day	97	30,000	2,250 Hours

INTERNAL RESISTANCE CHARACTERISTICS
Pulse Test @ 21°C (70°F)

Schedule: Continuous for background
2 seconds X 12times/day for pulse
Typical Background Drain @ 2.9V (milliamps):
0.295 milliamperes
Typical Pulse Drain @ 2.6V (milliamps):
7.3 milliamperes
Background Load:
10k ohms
Pulse Load:
400 ohms

IR CHARACTERISTICS
Pulse Test @ 21°C (70°F)

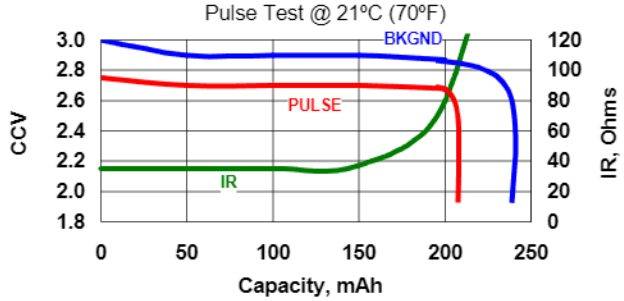



Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.
Contents herein do not constitute a warranty.
Copyright © Eveready Battery Co. Inc. - All Rights Reserved

EVEREADY BATTERY CO. 1-800-383-7323 / USA
Internet: www.energizer.com 1-800-268-5870 / CANADA

ENERGIZER NO. CR2032

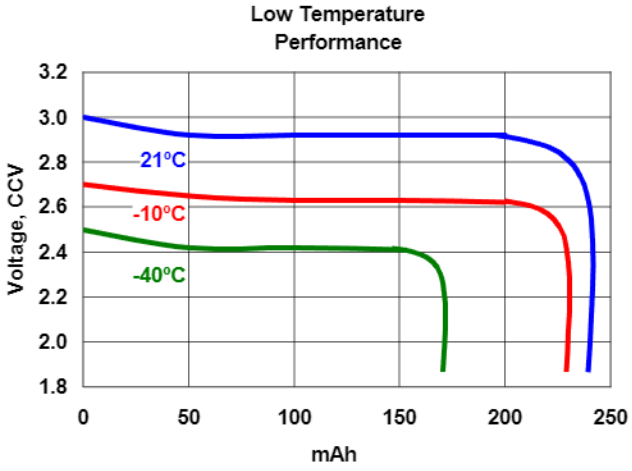

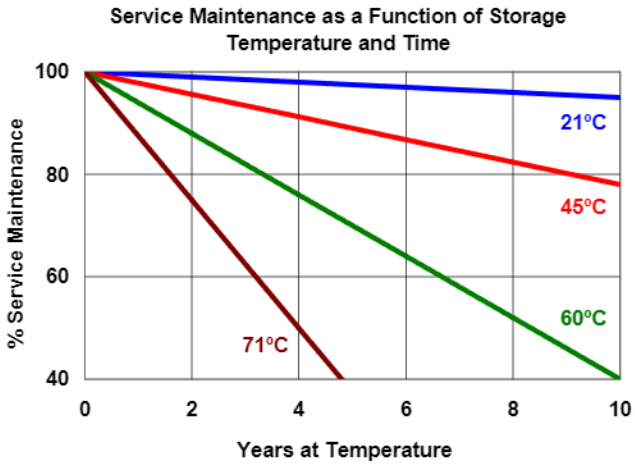

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.
Contents herein do not constitute a warranty.
Copyright © Eveready Battery Co. Inc. - All Rights Reserved