	FICHA TECNICO COMERCIAL LINEA CIELORASO EN PVC	ZR-07 V24
		Revisión: 04-3
		Fecha: 2023-MAR-03

Los paneles decorativos están hechos de PVC extruido con precisión y decorados con diseños que van desde el mármol, blancos, brillantes a patrones de madera.








Descripción general del producto


Producto	Láminas y accesorios de PVC para cieloraso y pared	
Especificación	**Característica**	Bajo peso, fácil instalación
	Material	Resina de PVC y Carbonato de Calcio
	Tipo	Lámina Plana, lámina acanalada
	Espesores	6, 6.5, 7, 7.5, 8, 8.5 y 9 mm
	Longitud	5,95 m
	Peso	2 a 3 kg
	Superficie	Impresión, Estampado en Caliente, Mate, Brillante
	Colores	Variedad de Colores

Instalación

Las láminas de PVC se instalan a estructuras similares a las de placas de drywall. En ambientes cálidos ó lugares de concentración de alta temperatura, segmentar omegas cada 40 centímetros.
Producto para uso exclusivo en interiores, debe evitarse el contacto ó exposición directa de la luz solar.
Estos paneles son perfectos para la instalación vertical, horizontal ó diagonal.
Tienen perfiles ranurados diseñados para permitir una fácil instalación, disminuyendo la sujeción por cualquiera engrapado, atornillado o clavad y ocultan el elemento de fijación.
Los paneles encajan entre sí con un sistema de ranura y lengüeta, y se fijan en un labio que queda oculto cuando se monta el panel siguiente.
El montaje puede ser a una superficie existente si está relativamente plana. La fijación se puede hacer con tornillos, grapas ó pegamento.

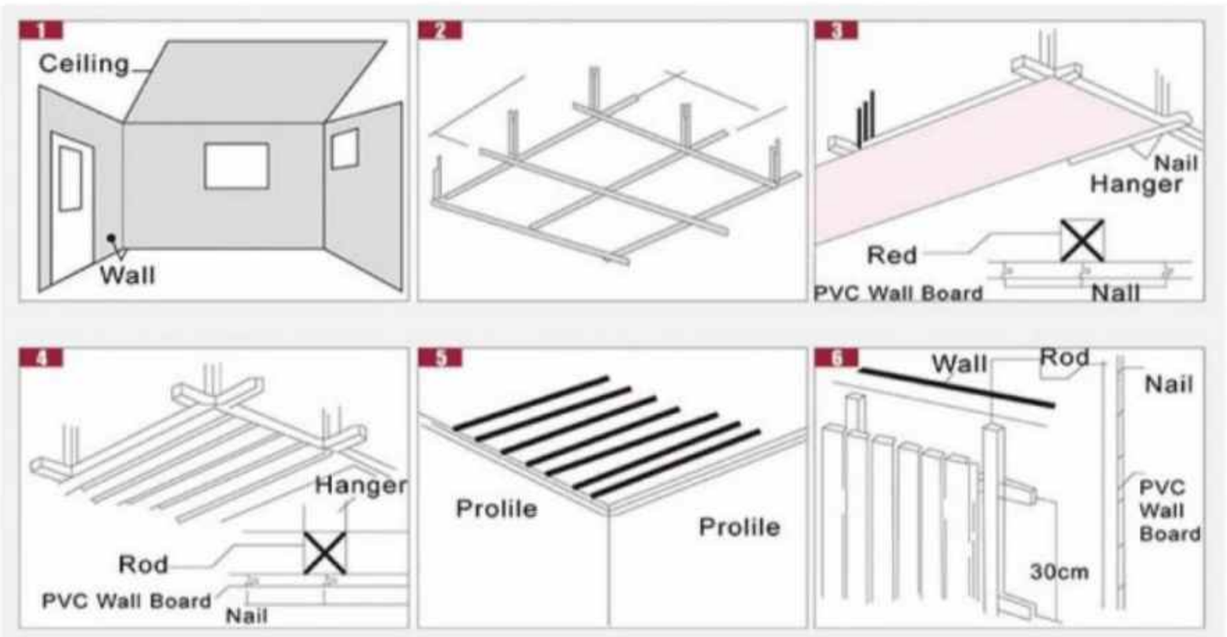

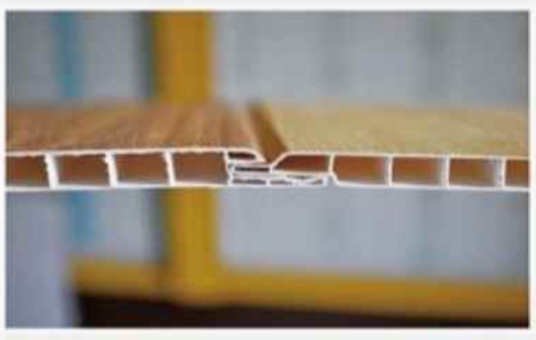

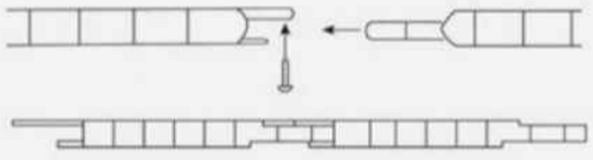

Powered by CamScanner

Propiedades


Físicas

Alta durabilidad y bajo mantenimiento.
Tiene una calificación de resistencia al fuego más segura que la madera u otros productos de fibra de madera. Test realizado por SGS
BS EN 13501-1:2007 +A1:2009, con resultado de clasificación B - s1, d0
Son resistentes al cambio de color o decoloración.
Calientes al tacto.
Temperatura de trabajo desde -28 °C a 63°C
Resistentes al agua; no se pudren, astillan, ni absorben el agua y son ideales para baños, laboratorios, industria, zonas de alta humedad, hospitales, industria de alimentos, residencial y comercio.
Aislante térmico.Transmitancia Térmica: K= 0.06 kcal/mhºC.
Aislante acústico. Coeficiente de absorción para 500 Hz: x= 0.32 Atenuación para 5000 Hz: i= 30 db.
No conducen electricidad.

Biológicas, Químicas y Ambientales

Inmune a plagas, insectos, hongos.
Resistente a thiner, varsol, alcohol, sales, grasas, detergentes
Resistente a ambientes agrestes como zonas marinas, industria, regiones con suelos ácidos.
Lavables.

Parámetros

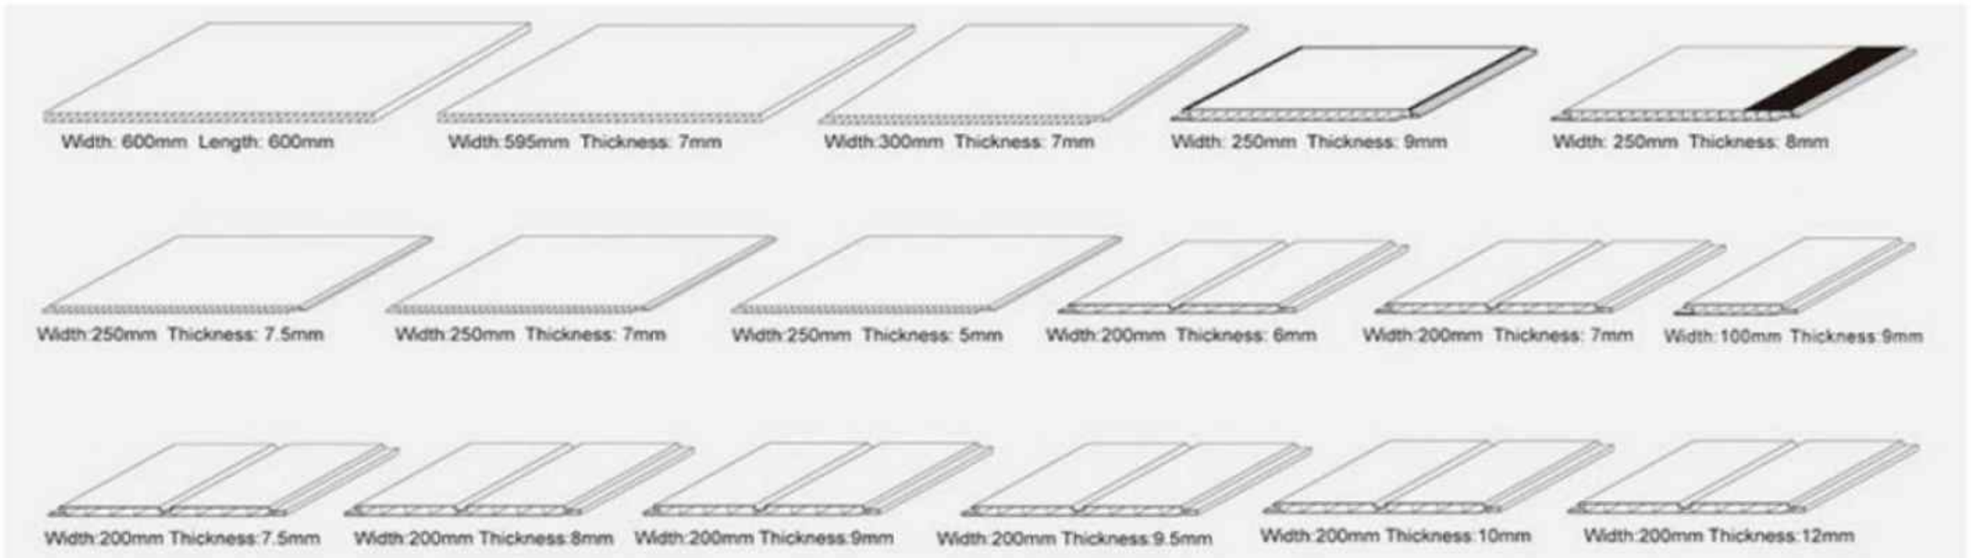

*		
1	Thickness	0.5cm, 0.6cm, 0.7cm, 0.75cm, 0.8cm, 0.85cm, 0.9cm, 0.95cm, 1.0cm, 1.1cm, 1.2cm, 1.5cm
2	Width	6cm 10cm 20cm 25cm 30cm 59.5cm 60.3cm
3	Length	2m, 2.7m, 3m, 3.66m, 4m, 5.8m, 5.95m, or by customer require
4	Weight	1.8kg, 1.9kg, 2.0kg, 2.1kg, 2.2kg, 2.3kg, 2.4kg, 2.5kg, 2.6kg, 2.7kg, 2.8kg, 2.9kg, 3.0kg, 3.1kg, 3.2kg, 3.3kg, 3.4kg, 3.5kg, 4.0kg, 4.5kg, 5.0kg/SQM
5	Material	35%, 40%, 45%, 50%, 55%, 60%, 65%, 70%, 75%, 80%, 85%PVC

*1 Espesor, 2 Ancho, 3 Longitud, 4 Peso, 5 Material (% PVC)





Empaque

Polietileno, polipropileno ó cartón etiquetado en los dos extremos.
Caja de accesorios: 5 grupos de 8 und zunchados con plástico. Caja de Láminas: 10 und.

Tipo	Descripción	Cantidad	m2 por caja	m lineales por caja	Dimensiones del empaqu	Peso / Caja Aprox.
1 Lámina	Láminas 5.95mx25cmx6mm	10 Und	14.9 m2	59.5 m	5.97mx0.27mx0.062m	31.24 kg
2 Lámina	Láminas 5.95mx25cmx6.5mm	10 Und	14.9 m2	59.5 m	5.97mx0.27mx0.072m	32.08 kg
3 Lámina Acanalada Laminada	Láminas 5.95mx20cmx8mm	10 Und	11.9 m2	59.5 m	5.97mx0.22mx0.082m	32.13 kg
4 Lámina	Láminas 5.95mx25cmx7.5mm	10 Und	14.9 m2	59.5 m	5.97mx0.27mx0.077m	37.19 kg
5 Lámina	Láminas 5.95mx30cmx9mm	8 Und	14.28 m2	59.5 m	5.97mx0.32mx0.101m	53.55 kg
6 Accesorios	Accesorios Varios	40 Und	N/A	238 m	5.97mx0.21mx0.081m	35.70 kg

Powered by CamScanner

Accesorios

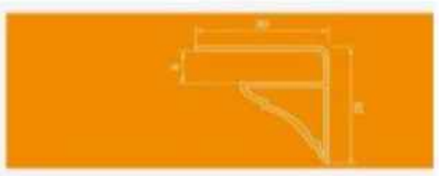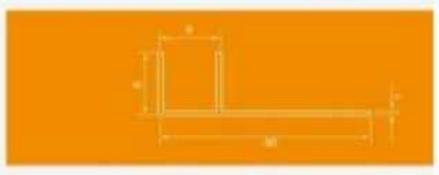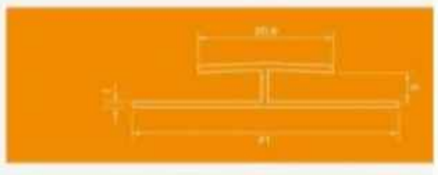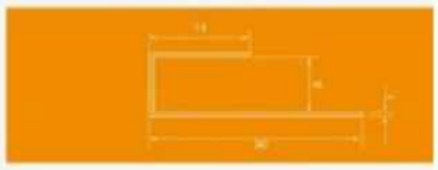Corniza perimetral		
Junta F		
Unión tipo H		
Junta L		
Perimetral J		
Ángulo Externo		
Ángulo Interno		

Transporte y Almacenamiento

El transporte del producto se debe hacer en vehículos de superficie plana y de más de 6 m de largo de carga.
Para el manejo y movilización del producto se requiere de mínimo 2 personas.
Para el transporte de láminas y accesorios de cantidades menores a la unidad de empaque, se debe proteger los extremos con polietileno tipo stretch.
Las láminas permiten doblarse hasta un ángulo de 45° con seguridad. Para águlos mayores debe hacerse individualmente sin superar los 90°
Se debe almacenar bajo la sombra.
Apilar hasta 30 cajas de láminas de hasta 7.5 mm de espesor, 20 cajas de 9 mm de espesor y 10 cajas de accesorios en forma vertical.
Dejar 1 cm de espacio como mínimo entre cada pila de cajas para evitar daños en las pestañas y lenguetas exteriores.
La superficie base debe ser plana y sin deformaciones.
Se recomienda el uso de estibas, pallets ó estantería.

Vida Útil

La vida útil de las láminas en las condiciones de manejo y aplicación aquí contenida es de hasta 25 años.
Se garantiza la calidad en el producto hasta por 10 años.

La información aquí contenida no compromete a Zambrios SAS en el uso fuera de estas especificaciones. La garantía no cubre averías por transporte, almacenamiento, instalación, actos de la naturaleza, uso inadecuado del producto. Zambrios SAS se reserva el derecho de modificar total ó parcialmente en el momento que lo considere, las especificaciones contenidas en este documento.
Parte de esta información es resultado de la experiencia propia en el uso y manejo del producto.

Powered by CamScanner

Certificado de prueba de resistencia contra el fuego

BS EN 13501-1:2007 +A1:2009, con resultado de clasificación B - s1, d0

SGS

Test Report No.: GZHG1506024481OT Date: Jul 08, 2015 Page 1 of 5

HAINING
NO.1, BUILDING 17, LIDO WATERFRONT 2,XIASHI STREET,HAINING,ZHEJIANG,CHINA

The following sample(s) was/were submitted and identified on behalf of the client as:

Sample Description	:	PVC PANEL
SGS Ref No.	:	SDHG1506009977FB
Manufacturer	:	HAIYAN
Other Info	:	MATERIAL AND MARK : PVC RESIN AND CALCIUM CARBONATE
Sample Receiving Date	:	Jun 25, 2015
Test Performing Date	:	Jun 25, 2015 to Jul 07, 2015

Test Result Summary

Test(s) Requested	Result(s)
BS EN 13501-1:2007+A1:2009	Classification: B-s1, d0

Summary:

1. For further details, please refer to the following page(s).

Signed for and on behalf of
Guangzhou Branch
SGS-CSTC Ltd.

Jason Cheung
Approved Signatory

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075191 e sgs.china@sgs.com

Powered by CamScanner

Certificado de no emisión de sustancias nocivas para la salud

Certificado de No emisión y contenido de Formaldeidos

SGS

Test Report No. SHAMLC16075859 Date: 06 May 2016 Page 1 of 3

Haining
NO 1,BUILDING 17,LIDO WATERFRONT 2,XIASHI STREET,HAINING,ZHEJIANG,CHINA

The following sample(s) was/were submitted and identified on behalf of the clients as : PVC PANEL

SGS Job No. :	SHCCM160401339 - SH
Material and Mark :	PVC RESIN AND CALCIUM CARBONATE
Manufacturer :	Haiyan Shenhai Plastic Decorative Factory
Date of Sample Received :	18 Apr 2016
Testing Period :	18 Apr 2016 - 06 May 2016
Test Requested :	Selected test(s) as requested by client.
Test Method :	Please refer to next page(s).
Test Results :	Please refer to next page(s).

Signed for and on behalf of
SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Shelly Li
Approved Signatory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS

Test Report No. SHAMLC1607585901 Date: 06 May 2016 Page 2 of 3

Test Results :

Test Part Description :

Specimen No.	SGS Sample ID	Description
SN1	SHA16-075859.001	White solid board

Remarks :
(1) 1 mg/kg = 0.0001%
(2) MDL = Method Detection Limit
(3) ND = Not Detected (< MDL)
(4) "-" = Not Regulated

Formaldehyde Emission

Test Method : With reference to EN 717-1:2004,analysis was performed by UV-Vis.

Test Item(s)	Unit	MDL	001
Formaldehyde Emission (in air)	mg/m³	0.080	ND

Notes :
(1) mg/m³ = milligrame per cubic meter
(2) Reference Limit: EN13986:2004(E)
Formaldehyde class E1: ≤0.124 mg/m³ air
Formaldehyde class E2: >0.124 mg/m³ air
(3) The test result is only for reference

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Powered by CamScanner