DISICO S.A. INGENIERIA

CARRERA 25 No. 24A – 49 PBX 368 6100 – 368 7334 FAX: 269 2679

BOGOTÁ, D.C. - COLOMBIA

CONTRATO 205 DE 2023
CONSEJO SUPERIOR DE A JUDICATURA

FRIOCOSTA Asesoría integral en confort

COMPROBANTE DE SERVICIO


FECHA		**CIUDAD**	
SECCIONAL			
SERVICIO	**INSTALACIÓN X**	**DESINTALACIÓN**	**MANTENIMIENTO**

ACTIVIDADES REALIZADAS	**EQUIPO**			
-se instala la caneleta para los cables y tuberias. -se instala la conexiones de las tuberias. --se realizan la instalacion de las bases de la condensadora. -se instala la condensadora -se realiza acople de tuercas de tuberias, se piden presion. -se realizan tiempo de vacio de 60 minutos y se deja el aire Operativo.	DISTANCIA ENTRE LA CONDENSADORA Y EL AA			Metros
	MARCA	Minisplit marca York Inverter.		
	BTU	12000	18000	24000
	SERIE CONDENSADORA	000002225230300144		
	SERIE MANEJADORA			

INSTALACION E INSPECCION									
TIEMPO VACIO			Minutos	INDICADOR MANOMETRO					PSI
SOLDADURA	**Bien**	Regular	Mal	N/A	DESAGUE	**Bien**			N/A
AISLAMIENTO	**Bien**	Regular	Mal	N/A	SIN FUGAS	**Bien**			N/A
FUNCIONAMIENTO MANEJADORA	**Bien**	Regular	Mal	N/A	FUNCIONAMIENTO CONDENSADORA	**Bien**			N/A

TECNICO	
FIRMA	

ENCARGADO	
FIRMA CONFORMIDAD	

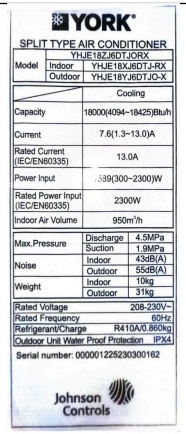

YORK

SPLIT TYPE AIR CONDITIONER


Model		YHJE18ZJ6DTJORX
	Indoor	YHJE18XJ6DTJ-RX
	Outdoor	YHJE18YJ6DTJO-X

	Cooling	
Capacity	18000(4094~18425)Btu/h	
Current	7.6(1.3~13.0)A	
Rated Current (IEC/EN60335)	13.0A	
Power Input	539(300~2300)W	
Rated Power Input (IEC/EN60335)	2300W	
Indoor Air Volume	950m³/h	
Max.Pressure	Discharge	4.5MPa
	Suction	1.9MPa
Noise	Indoor	43dB(A)
	Outdoor	55dB(A)
Weight	Indoor	10kg
	Outdoor	31kg
Rated Voltage		208-230V~
Rated Frequency		60Hz
Refrigerant/Charge		R410A/0.860kg
Outdoor Unit Water Proof Protection		IPX4

Serial number: 000001225230300162

Johnson Controls

IMAGEN 1. Facatativa

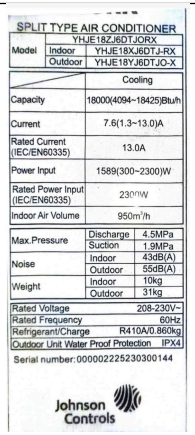

SPLIT TYPE AIR CONDITIONER

Model		YHJE18ZJ6DTJORX
	Indoor	YHJE18XJ6DTJ-RX
	Outdoor	YHJE18YJ6DTJO-X

	Cooling	
Capacity	18000(4094~18425)Btu/h	
Current	7.6(1.3~13.0)A	
Rated Current (IEC/EN60335)	13.0A	
Power Input	1589(300~2300)W	
Rated Power Input (IEC/EN60335)	2300W	
Indoor Air Volume	950m³/h	
Max.Pressure	Discharge	4.5MPa
	Suction	1.9MPa
Noise	Indoor	43dB(A)
	Outdoor	55dB(A)
Weight	Indoor	10kg
	Outdoor	31kg
Rated Voltage		208-230V~
Rated Frequency		60Hz
Refrigerant/Charge		R410A/0.860kg
Outdoor Unit Water Proof Protection		IPX4

Serial number: 000002225230300144

Johnson Controls

IMAGEN 2. Facatativa



IMAGEN 3. Facatativa

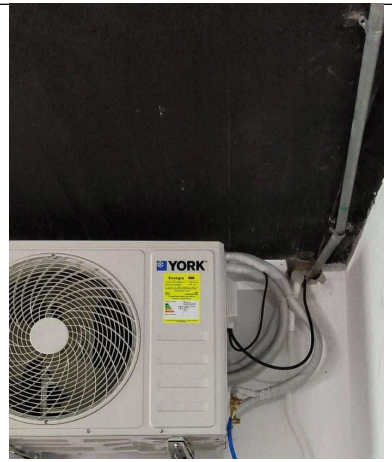


IMAGEN 4. Facatativa