YOKE®

Safety is our first priority™

FICHA TÉCNICA N-904 (900)


CONECTOR ANCLAJE FIJO (5/8")



N-904
Anchorage Connector (5/8")

Forged steel, heat treated
100% proof loaded to 3600 lbs / 16 kN
Min. Breaking load : 5000 lbs / 23 kN
for 5/8 : (M16) bolt.
Net weight : 21.3 oz. / 582 g.

yellow zinc

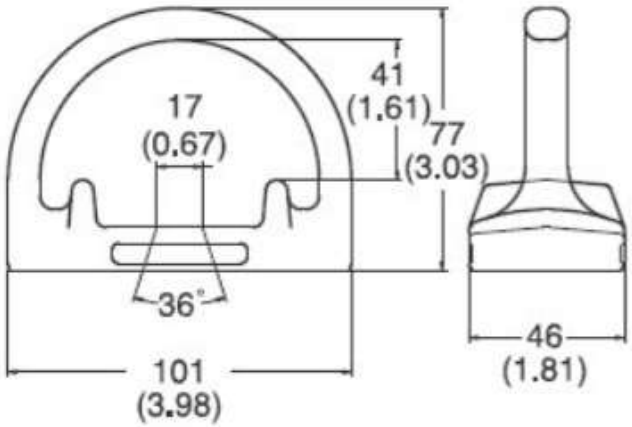

Forjado en acero y sometido a tratamiento térmico (Resistencia 3600lbs / 16kN como prueba de carga, carga mínima de ruptura: 5000lbs / 23kN)

Se instalan con un perno RGM16X190 o FTR 5/8 x 7 5/8

Se pueden instalar en concreto o en estructura metálica.

Este dispositivo debe instalarse con un profesional calificado que avale el punto de anclaje.

ANSI CSA®

mm (inch)

YOKE

Safety is our first priority

SABS

YOKE INDUSTRIAL CORP.

Test Certificate

80041524-000050

O :	COMERCIALIZADORA 3G Ckm 2.5 via Siberia Empresarial Empresarial Portos Sabana 80 COTA, Bogota Colombia Tel: 573124341955
nvoice NO:	90038986
escription:	ITEM: N-904 Anchorage Connector, Yellow Zinc Batch No : WMK Quantity :

aterial :	Alloy Steel	Proof Load Test 100% :	16kN (3600LBS)
ini. Breaking oad :	23kN (5000LBS)	Heat Treat :	35-42HRC
lating :	Yellow Zinc		

ESTING ACCORDING TO ANSI Z359.12,CSA Z259.12

TEST RESULT	YOKE INDUSTRIAL CORP.
Pass	Dated: February 10, 2017
	Qualification: QA Manager