
Transflex® 2400 - 2800

Juntas de dilatación de Alto Movimiento para puentes

High Movement bridge expansion joints

Las juntas Transflex® de Alto Movimiento han sido diseñadas para cubrir grandes recorridos. Están formadas por dos módulos, el módulo de movimiento y el módulo de puenteo. El módulo de movimiento es la parte "móvil" formada de caucho y acero, encargado de acomodarse a los movimientos previstos. El módulo de puenteo es la parte "fija", siendo el encargado de puentear la abertura estructural. Estas juntas permiten absorber grandes movimientos y a la vez proporcionan notable comodidad al tráfico rodado, un sellado eficaz, bajo mantenimiento y fácil reposición / *The High Movement Transflex® expansion joints have been designed to cover large movements. They consist of two modules, the movement module and the bridging module. The movement module is the "mobile" section of the joint, made of rubber and steel, aimed to accommodate the expected movements. The bridging module is the "fixed" section of the joint, aimed to bridge the structural opening. The High Movement Transflex® expansion joints absorb large movements while providing remarkable comfort to traffic, effective sealing, low maintenance and easy replacement.*

Los modelos de junta Transflex® de Alto Movimiento numerados del 2400 a 2800, cubren un rango de movimientos que va desde 600mm hasta 700mm / *High Movement Transflex® models are numbered from 2400 to 2800, and cover a movement range from 600mm to 700mm.*

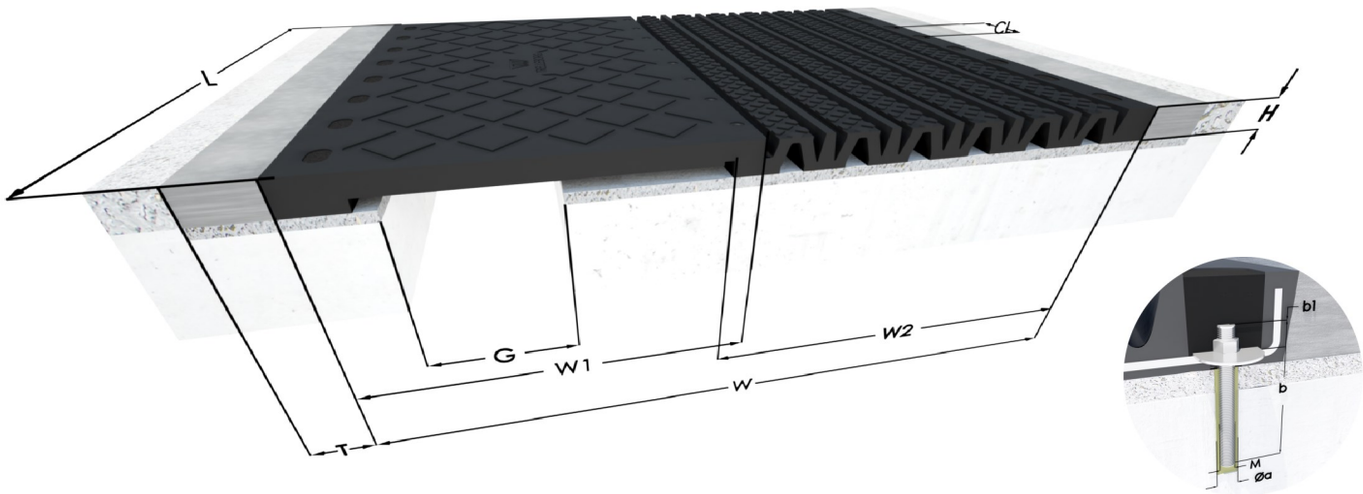

Transflex	Recorrido / *Movement*		Módulo / *Module*								Perno / *Stud*		
	Longitudinal	Vertical	L	H	W	W1	W2	CL	G	T	Mxb	Øa	b1
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
Fuelle 2400 + Chapón 4000	600 (±300)	-	1600	85	2165	1280	955	200	600	170	M-20 x 200	22	55
Fuelle 2800 + Chapón 4400	700 (±350)	140 (+65/-75)	1600	85	2435	1410	1095	200	800	170	M-20 x 200	22	55

W1: Longitud del módulo de puenteo / *Length of bridging module*
CL: Distancia longitudinal entre anclajes / *Longitudinal distance between anchors*
M: Diámetro del perno / *Bolt diameter*
Øa: Diámetro mínimo del taladro / *Minimum coring drill diameter*
W2: Longitud del módulo de movimiento / *Length of the movement module*
T: Anchura de la transición / *Transition width*
b1: Altura del perno sobre cama de mortero / Bolt height over *bedding mortar*

G: Máxima abertura estructural en el momento de la instalación para permitir movimientos nominales / *Maximum structural gap at installation to allow nominal movements*

* **Los movimientos longitudinales y verticalles mostrados en el cuadro se pueden realizar de forma simultánea /**
Longitudinal and vertical movements shown in the table can be performed simultaneously.

** **Todos estos modelos de junta admiten movimientos verticales. Contacte con nuestro departamento técnico /**
All these Transflex types allow vertical movements. Kindly conctact our Techncal Department.

Trelleborg Izarra, S.A.U.

C/Sierra de Algodonales, 12-14, - 28500 Arganda del Rey (Madrid) - Spain
Tel.: +34 91 870 17 00 - expandite@trelleborg.com - www.trelleborg.com

CAT0161_0GN19