


General Arrangement

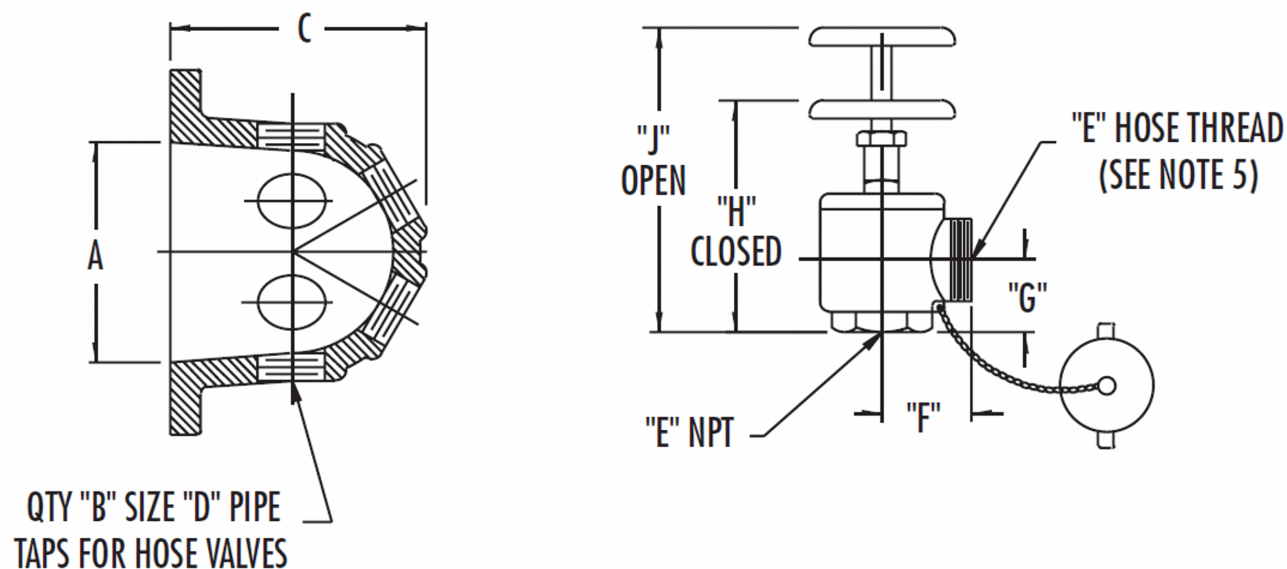

A	B	C	D
63.50	25.40	28.70	63.50

E	F	G	H	J
63.50	88.90	69.85	241	279

NOTES:

- Dimensions are in inches (mm) and may vary $\pm 1/4$ (6).
- Components shown are shipped loose for field installation and assembly.
- Manifold supply size "A" and the number of hose valves ("B") meets or exceeds the minimums specified by N.F.P.A. 20 for the pump ratings indicated.
- Manifolds for 3000 through 5000 GPM ratings consist of multiple sections and may require support (by others).
- 1-1/2" Hose valves furnished with 1-1/2" National Standard Fire Hose Thread: 1.9900 (50.55) O.D. (max.)
, 6 threads per inch. 2-1/2" Hose valves are furnished with 2-1/2" National Standard Fire Hose Thread: 3.0686 (77.94) O.D. (max.), 7-1/2 threads per inch. Refer to factory for other thread conventions or adaptors.

Quote Information			
Customer	Astro Maquinaria Ltda		
Customer Quote	2289098		
Job Name			
Market	-		
	Quote Item	002	
	Quote Date		