

Powered by CamScanner

Powered by CamScanner

Powered by CamScanner



Powered by CamScanner

Powered by CamScanner

Powered by CamScanner



Powered by CamScanner

Powered by CamScanner

Powered by CamScanner



Powered by CamScanner

Powered by CamScanner

Powered by CamScanner



Powered by CamScanner

Powered by CamScanner

Powered by CamScanner


PESO (kg/lb)
Tara
kg=
lb=
PRECIO UNITARIO (Kg/lb)
TOTAL($)
AC
1
2
3
TARA
4
5
6
+
7
8
9
C
0
•
CMB
CERO
CTA
MUE
KG/LB
LUZ
ACERO INOXIDABLE
GO METROLOGIA SAS
NIT. 901520916-0
TEL.3156023534
SERVICIO MTTO CAL REPUESTOS
VENTA EQUIPO
INFORME No
FECHA
TEK

Powered by CamScanner



Powered by CamScanner

Electronic

Kitchen scale

NOBELSOUND

SF-400

CAPACITY:

ON/OFF

MODE

TARE

SF-400

ZERO

g

TARE

OZ

CAPACITY:
10000gX1g/353ozX0.1oz

ON/OFF

MODE

TARE

Powered by CamScanner



-50℃
...300℃

- Air conditioning
- Food Processing
- Heating and Ventilating
- Agriculture
- Petrocarbons
- Automobile
- Photography
- Food Storage
- Refrigeration
- Brewing
- Pharmaceutical
- Process Control
- Laboratory
- Energy Management

Wide range of applications:

WITH STAINLESS
STEEL SENSORPROBE

DIGITAL THERMOMETER



DIGITAL THERMOMETER

JR-1

Parameters


- Temperature range:-50℃~ +300℃ (-58°F~ 572°F)
- Distinguishing rate:0.1℃
- Accuracy: (-20℃-80℃) ± 1℃
- Power voltage:DC 1.5V

Functions


- Memory of the last measuring
- Saving power:auto-off after 10 minutes of no-operation
- Switch between ℃ and°F

Operation description

- [ON/OFF]:Press the key to turn on/off the thermometer. When turn on it into measuring mode. Auto-off after 10 minutes of no-operation.
- [℃/°F]: In the mode of temperature display, press the key to switch between ℃ and° F.
- Display LL.L; when sensor open circuit or lower than measuring range; Display HH.H; when sensor short circuit or higher than measuring range.

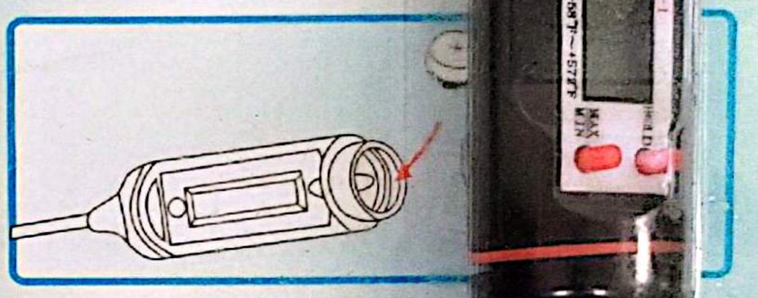

MADE IN CHINA

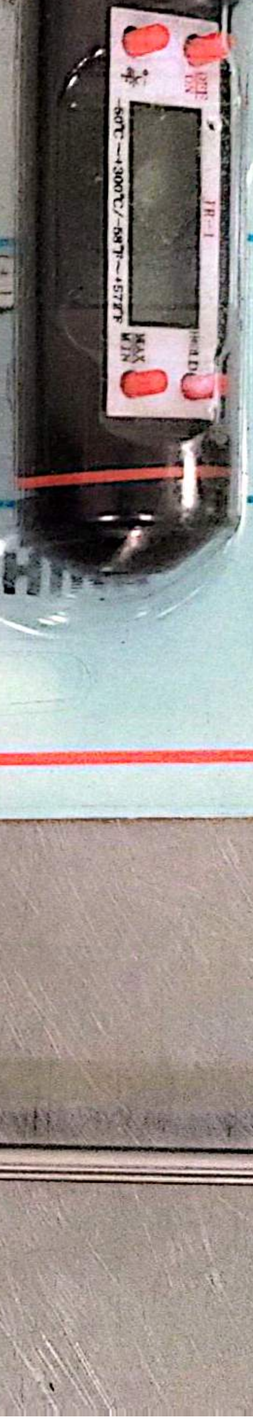

Powered by CamScanner

